

OPTIMAL Junior® Easy


with DÄMMGULAST®, galvanised

Application

- Suitable for pipe attachments in industrial areas
- Suitable for fastening of drinking water and heating pipes
- For indoor use

Your advantages

- Practical latching fastener
- The pipe is free to move during the installation
- Quick installation due to the single fastening bolt
- Captive fastening bolt
- DÄMMGULAST® vibration control lining with green identification stripe: average sound level improvement up to 17 dB(A)

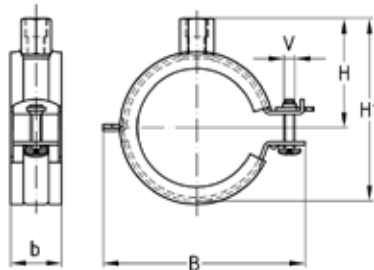

Features



Size	Max. recommended load [N]
1/4" - 1 1/2"	700
55 mm - 3"	800
102 mm - 4"	1,200

Connecting thread	Size		Clamping range [mm]	b	Dimensions [mm]				Part no.	Sales unit	Pack unit
	[inch]	[mm]			B	H	H1	V			
M8	1/4"		12 - 14	20	41	21	34	M5	175045	150	Pieces
	3/8"		15 - 19		45	23	38		175046		
	1/2"		21 - 23		50	25	42		175047	100	
	3/4"		26 - 28			28	47		175048		
	1"		32 - 35		61	31	54		175049	50	
	1 1/4"		40 - 43		69	35	62		175050		
	1 1/2"		48 - 51		77	39	70		175051	175052	
		55	52 - 56		85	42	76		175053		
	2"		57 - 61		89	44	80		175054	150	
									175124		
M8/M10	1/4"		12 - 14	23	41	30	43	M6	175125	100	Pieces
	3/8"		15 - 19		45	32	47		175126		
	1/2"		21 - 23		50	34	51		175127	50	
	3/4"		26 - 28			37	56		175128		
	1"		32 - 35		61	40	63		175129	150	
	1 1/4"		40 - 43		69	44	71		175130		
	1 1/2"		48 - 51		77	48	79		175131	100	
		55	52 - 56		85	51	85		175132		
	2"		57 - 61		89	53	89		175133	50	
		65	63 - 67		94	56	94		175134		
		72	70 - 73		102	60	102		175135	25	
	2 1/2"		74 - 80		108	63	109		175136		
	3"		83 - 91		119	69	120		175137	175057	
		102	101 - 106		139	78	139		175058		
4"		108 - 114	147	82	147	175059					