

Thickn. (ga) [mm]: 1.5 2.0

Cable Ladder

Kablo Merdiveni UKM Serisi - Кабельлесты



Important!

Joining cable ladder sections together only through the use of couplers 2 pcs for 1 length To install cable ladder-straight use Screw sets CFS M6 or CFS M8

Hot-Dip Galvanized



UKM ... H150		1.5mm			
CODE	Width a mm	Length L mm	kg 1m	pcs	
UKM 1510 15 HDG	100	3000	4.90	2	
UKM 1515 15 HDG	150	3000	5.06	2	
UKM 1520 15 HDG	200	3000	5.21	2	
UKM 1525 15 HDG	250	3000	5.36	2	
UKM 1530 15 HDG	300	3000	5.52	2	
UKM 1540 15 HDG	400	3000	5.82	2	
UKM 1545 15 HDG	450	3000	5.97	2	
UKM 1550 15 HDG	500	3000	6.13	2	
UKM 1560 15 HDG	600	3000	6.43	2	
UKM 1570 15 HDG	700	3000	6.74	2	
UKM 1575 15 HDG	750	3000	6.89	2	
UKM 1580 15 HDG	800	3000	7.05	2	
UKM 1590 15 HDG	900	3000	7.35	2	
UKM 1500 15 HDG	1000	3000	7.66	2	
UKM 1502 15 HDG	1200	3000	8.27	2	

UKM ... H150		2.5mm			
CODE	Width a mm	Length L mm	kg 1m	pcs	
UKM 1510 25 HDG	100	3000	8.17	2	
UKM 1515 25 HDG	150	3000	8.42	2	
UKM 1520 25 HDG	200	3000	8.68	2	
UKM 1525 25 HDG	250	3000	8.93	2	
UKM 1530 25 HDG	300	3000	9.19	2	
UKM 1540 25 HDG	400	3000	9.70	2	
UKM 1545 25 HDG	450	3000	9.95	2	
UKM 1550 25 HDG	500	3000	10.21	2	
UKM 1560 25 HDG	600	3000	10.72	2	
UKM 1570 25 HDG	700	3000	11.23	2	
UKM 1575 25 HDG	750	3000	11.49	2	
UKM 1580 25 HDG	800	3000	11.74	2	
UKM 1590 25 HDG	900	3000	12.25	2	
UKM 1500 25 HDG	1000	3000	12.76	2	
UKM 1502 25 HDG	1200	3000	13.78	2	

UKM ... H150		2.0mm			
CODE	Width a mm	Length L mm	kg 1m	pcs	
UKM 1510 20 HDG	100	3000	6.54	2	
UKM 1515 20 HDG	150	3000	6.74	2	
UKM 1520 20 HDG	200	3000	6.94	2	
UKM 1525 20 HDG	250	3000	7.15	2	
UKM 1530 20 HDG	300	3000	7.35	2	
UKM 1540 20 HDG	400	3000	7.76	2	
UKM 1545 20 HDG	450	3000	7.96	2	
UKM 1550 20 HDG	500	3000	8.17	2	
UKM 1560 20 HDG	600	3000	8.58	2	
UKM 1570 20 HDG	700	3000	8.99	2	
UKM 1575 20 HDG	750	3000	9.19	2	
UKM 1580 20 HDG	800	3000	9.39	2	
UKM 1590 20 HDG	900	3000	9.80	2	
UKM 1500 20 HDG	1000	3000	10.21	2	
UKM 1502 20 HDG	1200	3000	11.03	2	


UKM ... H150		3.0mm			
CODE	Width a mm	Length L mm	kg 1m	pcs	
UKM 1510 30 HDG	100	3000	9.80	2	
UKM 1515 30 HDG	150	3000	10.11	2	
UKM 1520 30 HDG	200	3000	10.41	2	
UKM 1525 30 HDG	250	3000	10.72	2	
UKM 1530 30 HDG	300	3000	11.03	2	
UKM 1540 30 HDG	400	3000	11.64	2	
UKM 1545 30 HDG	450	3000	11.94	2	
UKM 1550 30 HDG	500	3000	12.25	2	
UKM 1560 30 HDG	600	3000	12.86	2	
UKM 1570 30 HDG	700	3000	13.48	2	
UKM 1575 30 HDG	750	3000	13.78	2	
UKM 1580 30 HDG	800	3000	14.09	2	
UKM 1590 30 HDG	900	3000	14.07	2	
UKM 1500 30 HDG	1000	3000	15.31	2	
UKM 1502 30 HDG	1200	3000	16.54	2	

UKM H150 HDG (L3000)

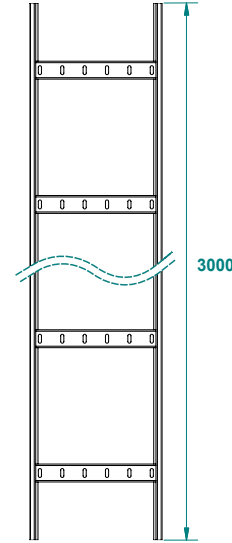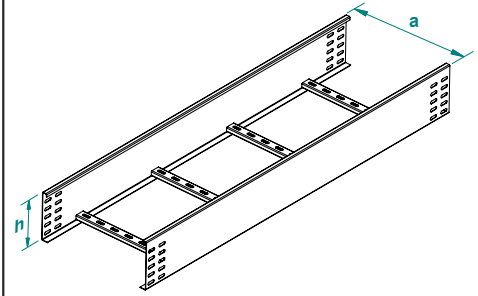


Width	Cross Section
100	83
150	125,5
200	168
300	253
400	338
500	423
600	508
750	635,5
900	763
1000	848
1200	1018

RUNG OF UKM

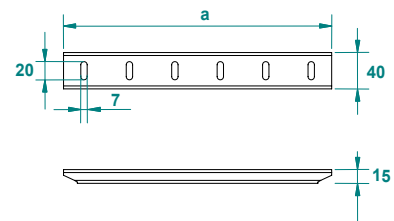

Fixing Unit for Cable Ladder


Merdiveni Sabitleme Elemanı - Фиксатор кабельлесты, боковой

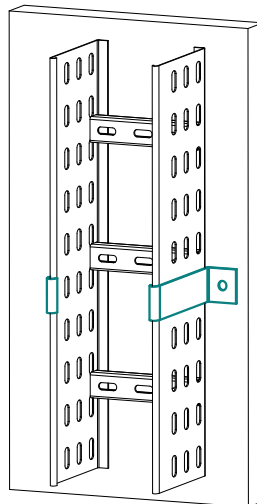

Hot-Dip Galvanized

MT/2 ... H150		1.5mm			
CODE	Height h mm	Fixing Hole D mm	kg 1m	pcs	
MT/2 15 HDG	155	11	0.16	100	

MT/2

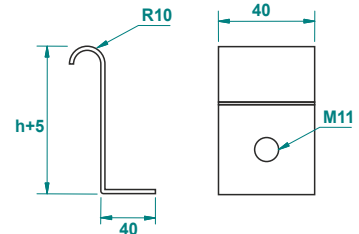

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0

Cable Ladder

Kablo Merdiveni UKM Serisi - Кабельлесты



Important!

Joining cable ladder sections together only through the use of couplers 2 pcs for 1 length To install cable ladder-straight use Screw sets CFS M6 or CFS M8

Hot-Dip Galvanized

UKM ... H150				1.5mm
CODE	Width a mm	Length L mm	KG 1m	pcs
UKM 1510.60 15 HDG	100	6000	4.90	2
UKM 1515.60 15 HDG	150	6000	5.06	2
UKM 1520.60 15 HDG	200	6000	5.21	2
UKM 1525.60 15 HDG	250	6000	5.36	2
UKM 1530.60 15 HDG	300	6000	5.52	2
UKM 1540.60 15 HDG	400	6000	5.82	2
UKM 1545.60 15 HDG	450	6000	5.97	2
UKM 1550.60 15 HDG	500	6000	6.13	2
UKM 1560.60 15 HDG	600	6000	6.43	2
UKM 1570.60 15 HDG	700	6000	6.74	2
UKM 1575.60 15 HDG	750	6000	6.89	2
UKM 1580.60 15 HDG	800	6000	7.05	2
UKM 1590.60 15 HDG	900	6000	7.35	2
UKM 1500.60 15 HDG	1000	6000	7.66	2
UKM 1502.60 15 HDG	1200	6000	8.27	2


				2.5mm
CODE	Width a mm	Length L mm	KG 1m	pcs
UKM 1510.60 25 HDG	100	6000	8.17	2
UKM 1515.60 25 HDG	150	6000	8.42	2
UKM 1520.60 25 HDG	200	6000	8.68	2
UKM 1525.60 25 HDG	250	6000	8.93	2
UKM 1530.60 25 HDG	300	6000	9.19	2
UKM 1540.60 25 HDG	400	6000	9.70	2
UKM 1545.60 25 HDG	450	6000	9.95	2
UKM 1550.60 25 HDG	500	6000	10.21	2
UKM 1560.60 25 HDG	600	6000	10.72	2
UKM 1570.60 25 HDG	700	6000	11.23	2
UKM 1575.60 25 HDG	750	6000	11.49	2
UKM 1580.60 25 HDG	800	6000	11.74	2
UKM 1590.60 25 HDG	900	6000	12.25	2
UKM 1500.60 25 HDG	1000	6000	12.76	2
UKM 1502.60 25 HDG	1200	6000	13.78	2

UKM ... H150				2.0mm
CODE	Width a mm	Length L mm	KG 1m	pcs
UKM 1510.60 20 HDG	100	6000	6.54	2
UKM 1515.60 20 HDG	150	6000	6.74	2
UKM 1520.60 20 HDG	200	6000	6.94	2
UKM 1525.60 20 HDG	250	6000	7.15	2
UKM 1530.60 20 HDG	300	6000	7.35	2
UKM 1540.60 20 HDG	400	6000	7.76	2
UKM 1545.60 20 HDG	450	6000	7.96	2
UKM 1550.60 20 HDG	500	6000	8.17	2
UKM 1560.60 20 HDG	600	6000	8.58	2
UKM 1570.60 20 HDG	700	6000	8.99	2
UKM 1575.60 20 HDG	750	6000	9.19	2
UKM 1580.60 20 HDG	800	6000	9.39	2
UKM 1590.60 20 HDG	900	6000	9.80	2
UKM 1500.60 20 HDG	1000	6000	10.21	2
UKM 1502.60 20 HDG	1200	6000	11.03	2

				3.0mm
CODE	Width a mm	Length L mm	KG 1m	pcs
UKM 1510.60 30 HDG	100	6000	9.80	2
UKM 1515.60 30 HDG	150	6000	10.11	2
UKM 1520.60 30 HDG	200	6000	10.41	2
UKM 1525.60 30 HDG	250	6000	10.72	2
UKM 1530.60 30 HDG	300	6000	11.03	2
UKM 1540.60 30 HDG	400	6000	11.64	2
UKM 1545.60 30 HDG	450	6000	11.94	2
UKM 1550.60 30 HDG	500	6000	12.25	2
UKM 1560.60 30 HDG	600	6000	12.86	2
UKM 1570.60 30 HDG	700	6000	13.48	2
UKM 1575.60 30 HDG	750	6000	13.78	2
UKM 1580.60 30 HDG	800	6000	14.09	2
UKM 1590.60 30 HDG	900	6000	14.70	2
UKM 1500.60 30 HDG	1000	6000	15.31	2
UKM 1502.60 30 HDG	1200	6000	16.54	2

Beam Fixing Unit For Cable Ladder (Set)


Merdiveni / Demire Sabitleme Elemanı (Takım) - Фиксатор кабельлесты на балку

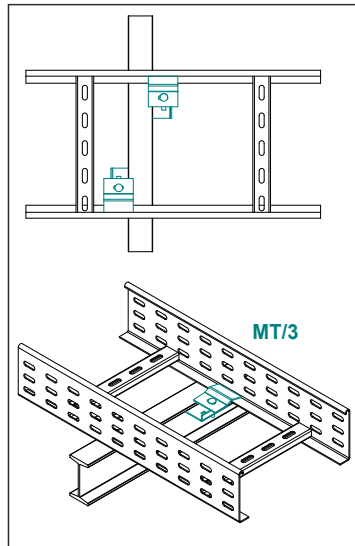


Stainless Steel - AISI 304L

MT/3				2.0mm
CODE	Bolt Metric mm	Thickness T mm	KG ad/pc	pcs
MT/3 S4	M6x30	2,0	0,12	100

UKM H150 HDG (L6000)

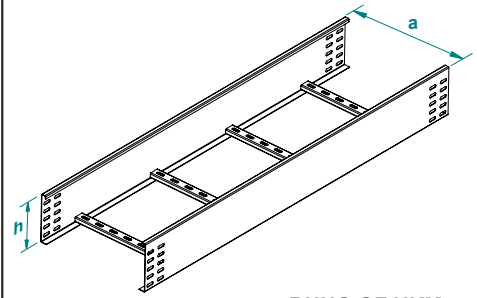


RUNG OF UKM

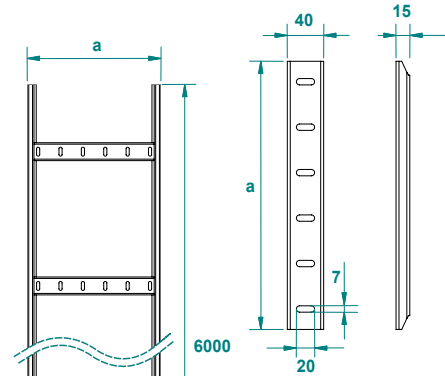

Width	Cross Section
100	83
150	125,5
200	168
300	253
400	338
500	423
600	508
750	635,5
900	763
1000	848
1200	1018

MT/3

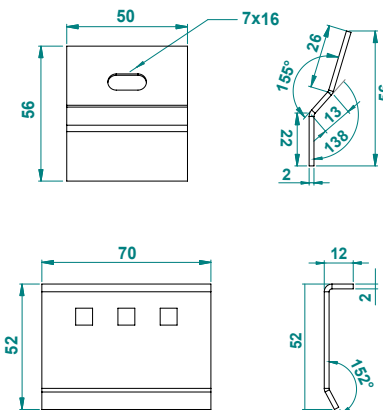

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0

90° Horizontal Bend of Cable Ladder

90° Merdiven Yatay Dönüş Elemanı - Угол кабельроста горизонтальный 90°



Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized

M90... H150		1.5mm			
CODE	Width a=b mm	Radius R mm	kg 1m	pcs	
M90 1510 15 HDG	100	150	2.43	1	
M90 1510 15 HDG	150	150	2.77	1	
M90 1510 15 HDG	200	150	3.00	1	
M90 1510 15 HDG	250	150	3.35	1	
M90 1510 15 HDG	300	150	3.58	1	
M90 1510 15 HDG	400	150	4.26	1	
M90 1510 15 HDG	450	150	4.60	1	
M90 1510 15 HDG	500	150	4.84	1	
M90 1510 15 HDG	600	150	5.41	1	
M90 1510 15 HDG	700	150	6.01	1	
M90 1510 15 HDG	750	150	7.13	1	
M90 1510 15 HDG	800	150	7.52	1	
M90 1510 15 HDG	900	150	8.06	1	
M90 1510 15 HDG	1000	150	9.74	1	
M90 1510 15 HDG	1200	150	11.21	1	

M90... H150		2.0mm			
CODE	Width a=b mm	Radius R mm	kg 1m	pcs	
M90 1510 20 HDG	100	150	3.24	1	
M90 1510 20 HDG	150	150	3.69	1	
M90 1510 20 HDG	200	150	4.00	1	
M90 1510 20 HDG	250	150	4.46	1	
M90 1510 20 HDG	300	150	4.77	1	
M90 1510 20 HDG	400	150	5.68	1	
M90 1510 20 HDG	450	150	6.14	1	
M90 1510 20 HDG	500	150	6.45	1	
M90 1510 20 HDG	600	150	7.21	1	
M90 1510 20 HDG	700	150	8.01	1	
M90 1510 20 HDG	750	150	9.51	1	
M90 1510 20 HDG	800	150	10.02	1	
M90 1510 20 HDG	900	150	10.75	1	
M90 1510 20 HDG	1000	150	12.98	1	
M90 1510 20 HDG	1200	150	14.95	1	

90° Horizontal Bend of Cable Ladder Radius:300

90° Merdiven Yatay Dönüş Elemanı R:300 - Угол кабельроста горизонтальный 90° радиус:300



Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized



M90R2... H150		1.5mm			
CODE	Width a=b mm	Radius R mm	kg pc	pcs	
M90R2 1510 15 HDG	100	300	4.04	1	
M90R2 1515 15 HDG	150	300	4.41	1	
M90R2 1520 15 HDG	200	300	4.77	1	
M90R2 1525 15 HDG	250	300	5.14	1	
M90R2 1530 15 HDG	300	300	5.50	1	
M90R2 1540 15 HDG	400	300	6.23	1	
M90R2 1545 15 HDG	450	300	6.59	1	
M90R2 1550 15 HDG	500	300	6.96	1	
M90R2 1560 15 HDG	600	300	8.23	1	
M90R2 1570 15 HDG	700	300	9.05	1	
M90R2 1575 15 HDG	750	300	9.46	1	
M90R2 1580 15 HDG	800	300	9.87	1	
M90R2 1590 15 HDG	900	300	10.69	1	
M90R2 1500 15 HDG	1000	300	12.43	1	
M90R2 1502 15 HDG	1200	300	14.25	1	

M90R2... H150		2.0mm			
CODE	Width a=b mm	Radius R mm	kg 1m	pcs	
M90R2 1510 20 HDG	100	300	5.39	1	
M90R2 1515 20 HDG	150	300	5.88	1	
M90R2 1520 20 HDG	200	300	6.36	1	
M90R2 1525 20 HDG	250	300	6.85	1	
M90R2 1530 20 HDG	300	300	7.33	1	
M90R2 1540 20 HDG	400	300	8.30	1	
M90R2 1545 20 HDG	450	300	8.79	1	
M90R2 1550 20 HDG	500	300	9.27	1	
M90R2 1560 20 HDG	600	300	10.98	1	
M90R2 1570 20 HDG	700	300	12.07	1	
M90R2 1575 20 HDG	750	300	12.62	1	
M90R2 1580 20 HDG	800	300	13.16	1	
M90R2 1590 20 HDG	900	300	14.26	1	
M90R2 1500 20 HDG	1000	300	16.27	1	
M90R2 1502 20 HDG	1200	300	19.00	1	

M90 H150 HDG

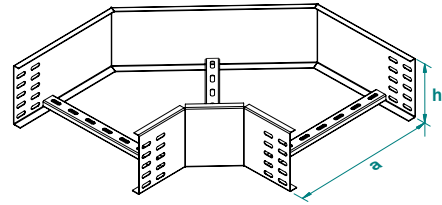

M90R2 H150 HDG

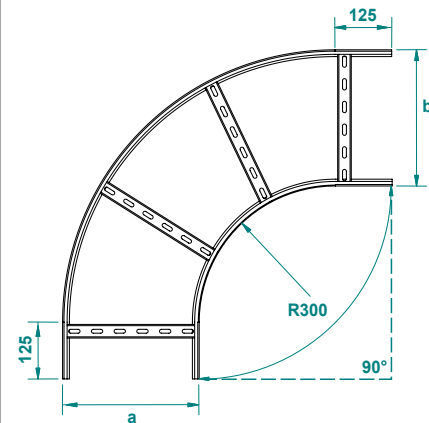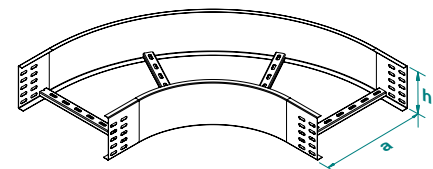

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method

to TS-EN 10346:2011 (PG)

SS- stainless steel AISI 304L and AISI 316L (SS)

EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0

90° Horizontal Bend of Cable Ladder Radius:450

90° Merdiven Yatay Dönüş Elemanı R:450 - Угол кабельроста горизонтальный 90° радиус:450



Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized

M90R3... H150		1.5mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
M90R3 1510 15 HDG	100	450	5.13	1	
M90R3 1515 15 HDG	150	450	5.49	1	
M90R3 1520 15 HDG	200	450	5.85	1	
M90R3 1525 15 HDG	250	450	6.45	1	
M90R3 1530 15 HDG	300	450	6.86	1	
M90R3 1540 15 HDG	400	450	7.68	1	
M90R3 1545 15 HDG	450	450	8.09	1	
M90R3 1550 15 HDG	500	450	8.50	1	
M90R3 1560 15 HDG	600	450	9.32	1	
M90R3 1570 15 HDG	700	450	10.78	1	
M90R3 1575 15 HDG	750	450	11.23	1	
M90R3 1580 15 HDG	800	450	11.69	1	
M90R3 1590 15 HDG	900	450	12.60	1	
M90R3 1500 15 HDG	1000	450	13.51	1	
M90R3 1502 15 HDG	1200	450	16.44	1	

M90R3... H150		2.0mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
M90R3 1510 20 HDG	100	450	6.83	1	
M90R3 1515 20 HDG	150	450	7.32	1	
M90R3 1520 20 HDG	200	450	7.80	1	
M90R3 1525 20 HDG	250	450	8.59	1	
M90R3 1530 20 HDG	300	450	9.14	1	
M90R3 1540 20 HDG	400	450	10.23	1	
M90R3 1545 20 HDG	450	450	10.78	1	
M90R3 1550 20 HDG	500	450	11.33	1	
M90R3 1560 20 HDG	600	450	12.42	1	
M90R3 1570 20 HDG	700	450	14.37	1	
M90R3 1575 20 HDG	750	450	14.98	1	
M90R3 1580 20 HDG	800	450	15.58	1	
M90R3 1590 20 HDG	900	450	16.80	1	
M90R3 1500 20 HDG	1000	450	18.02	1	
M90R3 1502 20 HDG	1200	450	21.92	1	

90° Horizontal Bend of Cable Ladder Radius:600

90° Merdiven Yatay Dönüş Elemanı R:600 - Угол кабельроста горизонтальный 90° радиус:600



Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized



M90R4... H150		1.5mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
M90R4 1510 15 HDG	100	600	6.30	1	
M90R4 1515 15 HDG	150	600	6.71	1	
M90R4 1520 15 HDG	200	600	7.12	1	
M90R4 1525 15 HDG	250	600	7.53	1	
M90R4 1530 15 HDG	300	600	7.94	1	
M90R4 1540 15 HDG	400	600	9.13	1	
M90R4 1545 15 HDG	450	600	9.58	1	
M90R4 1550 15 HDG	500	600	10.04	1	
M90R4 1560 15 HDG	600	600	10.95	1	
M90R4 1570 15 HDG	700	600	11.86	1	
M90R4 1575 15 HDG	750	600	13.00	1	
M90R4 1580 15 HDG	800	600	13.51	1	
M90R4 1590 15 HDG	900	600	14.51	1	
M90R4 1500 15 HDG	1000	600	15.51	1	
M90R4 1502 15 HDG	1200	600	18.62	1	

M90R4... H150		2.0mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
M90R4 1510 20 HDG	100	600	8.40	1	
M90R4 1515 20 HDG	150	600	8.94	1	
M90R4 1520 20 HDG	200	600	9.49	1	
M90R4 1525 20 HDG	250	600	10.04	1	
M90R4 1530 20 HDG	300	600	10.58	1	
M90R4 1540 20 HDG	400	600	12.17	1	
M90R4 1545 20 HDG	450	600	12.77	1	
M90R4 1550 20 HDG	500	600	13.38	1	
M90R4 1560 20 HDG	600	600	14.60	1	
M90R4 1570 20 HDG	700	600	15.81	1	
M90R4 1575 20 HDG	750	600	17.34	1	
M90R4 1580 20 HDG	800	600	18.01	1	
M90R4 1590 20 HDG	900	600	19.34	1	
M90R4 1500 20 HDG	1000	600	20.68	1	
M90R4 1502 20 HDG	1200	600	24.83	1	

M90R3 H150 HDG

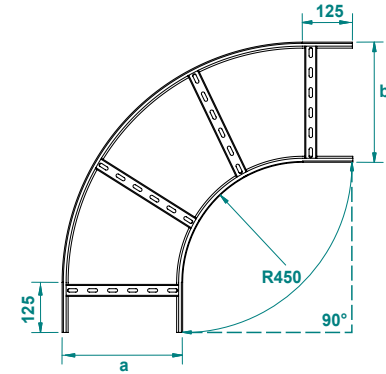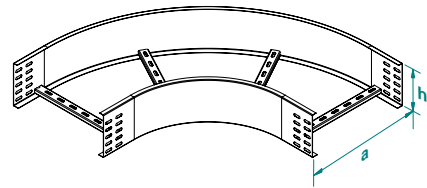

M90R4 H150 HDG

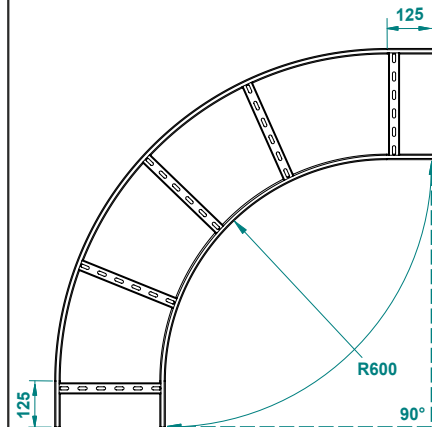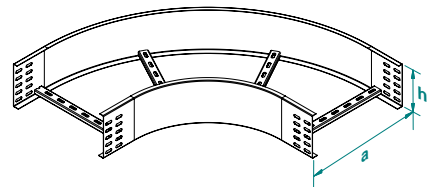

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0

60° Horizontal Bend of Cable Ladder

60° Merdiven Yatay Dönüş Elemanı - Угол кабельроста горизонтальный 60°



Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized

M60... H150		1.5mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
M60 1510 15 HDG	100	150	2.13	1	
M60 1510 15 HDG	150	150	2.33	1	
M60 1510 15 HDG	200	150	2.52	1	
M60 1510 15 HDG	250	150	2.72	1	
M60 1510 15 HDG	300	150	2.92	1	
M60 1510 15 HDG	400	150	3.31	1	
M60 1510 15 HDG	450	150	3.51	1	
M60 1510 15 HDG	500	150	3.70	1	
M60 1510 15 HDG	600	150	4.59	1	
M60 1510 15 HDG	700	150	5.07	1	
M60 1510 15 HDG	750	150	5.30	1	
M60 1510 15 HDG	800	150	5.54	1	
M60 1510 15 HDG	900	150	6.02	1	
M60 1510 15 HDG	1000	150	7.48	1	
M60 1510 15 HDG	1200	150	8.60	1	

M60... H150		2.0mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
M60 1510 20 HDG	100	150	2.84	1	
M60 1515 20 HDG	150	150	3.10	1	
M60 1520 20 HDG	200	150	3.36	1	
M60 1525 20 HDG	250	150	3.63	1	
M60 1530 20 HDG	300	150	3.89	1	
M60 1540 20 HDG	400	150	4.41	1	
M60 1545 20 HDG	450	150	4.67	1	
M60 1550 20 HDG	500	150	4.93	1	
M60 1560 20 HDG	600	150	6.12	1	
M60 1570 20 HDG	700	150	6.75	1	
M60 1575 20 HDG	750	150	7.07	1	
M60 1580 20 HDG	800	150	7.39	1	
M60 1590 20 HDG	900	150	8.02	1	
M60 1500 20 HDG	1000	150	9.97	1	
M60 1502 20 HDG	1200	150	11.46	1	

60° Horizontal Bend of Cable Ladder Radius:300

60° Merdiven Yatay Dönüş Elemanı R:300 - Угол кабельроста горизонтальный 60° радиус:300



Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized



M60R2... H150		1.5mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
M60R2 1510 15 HDG	100	300	3.11	1	
M60R2 1510 15 HDG	150	300	3.37	1	
M60R2 1510 15 HDG	200	300	3.63	1	
M60R2 1510 15 HDG	250	300	3.88	1	
M60R2 1510 15 HDG	300	300	4.14	1	
M60R2 1510 15 HDG	400	300	4.66	1	
M60R2 1510 15 HDG	450	300	4.92	1	
M60R2 1510 15 HDG	500	300	5.17	1	
M60R2 1510 15 HDG	600	300	6.24	1	
M60R2 1510 15 HDG	700	300	6.85	1	
M60R2 1510 15 HDG	750	300	7.15	1	
M60R2 1510 15 HDG	800	300	7.46	1	
M60R2 1510 15 HDG	900	300	8.06	1	
M60R2 1510 15 HDG	1000	300	9.59	1	
M60R2 1510 15 HDG	1200	300	10.99	1	

M60R2... H150		2.0mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
M60R2 1510 20 HDG	100	300	4.15	1	
M60R2 1515 20 HDG	150	300	4.49	1	
M60R2 1520 20 HDG	200	300	4.83	1	
M60R2 1525 20 HDG	250	300	5.18	1	
M60R2 1530 20 HDG	300	300	5.52	1	
M60R2 1540 20 HDG	400	300	6.21	1	
M60R2 1545 20 HDG	450	300	6.55	1	
M60R2 1550 20 HDG	500	300	6.90	1	
M60R2 1560 20 HDG	600	300	8.32	1	
M60R2 1570 20 HDG	700	300	9.13	1	
M60R2 1575 20 HDG	750	300	9.54	1	
M60R2 1580 20 HDG	800	300	9.94	1	
M60R2 1590 20 HDG	900	300	10.75	1	
M60R2 1500 20 HDG	1000	300	12.79	1	
M60R2 1502 20 HDG	1200	300	14.65	1	

M60 H150 HDG

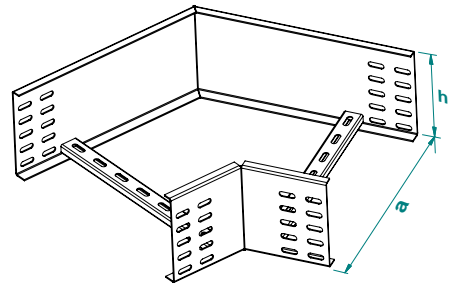

M60R2 H150 HDG

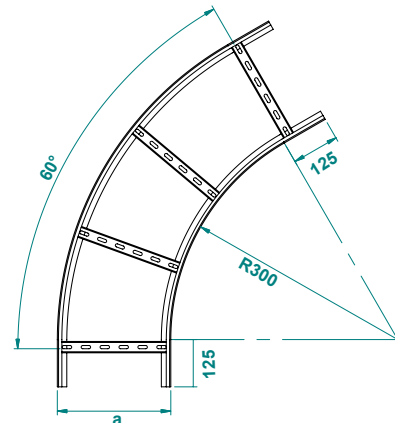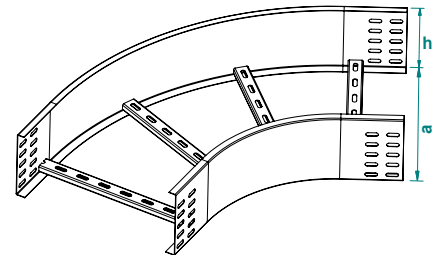

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0

60° Horizontal Bend of Cable Ladder Radius:450

60° Merdiven Yatay Dönüş Elemanı R:450 - Угол кабельроста горизонтальный 60° радиус:450



Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized

M60R3... H150					M60R3... H150				
1.5mm					2.0mm				
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	CODE	Width a=b mm	Radius R mm	kg 1pc	pcs
M60R3 1510 15 HDG	100	450	3.83	1	M60R3 1510 20 HDG	100	450	5.11	1
M60R3 1515 15 HDG	150	450	4.09	1	M60R3 1515 20 HDG	150	450	5.45	1
M60R3 1520 15 HDG	200	450	4.35	1	M60R3 1520 20 HDG	200	450	5.80	1
M60R3 1525 15 HDG	250	450	4.84	1	M60R3 1525 20 HDG	250	450	6.45	1
M60R3 1530 15 HDG	300	450	5.14	1	M60R3 1530 20 HDG	300	450	6.85	1
M60R3 1540 15 HDG	400	450	5.75	1	M60R3 1540 20 HDG	400	450	7.66	1
M60R3 1545 15 HDG	450	450	6.05	1	M60R3 1545 20 HDG	450	450	8.07	1
M60R3 1550 15 HDG	500	450	6.35	1	M60R3 1550 20 HDG	500	450	8.47	1
M60R3 1560 15 HDG	600	450	6.96	1	M60R3 1560 20 HDG	600	450	9.28	1
M60R3 1570 15 HDG	700	450	7.57	1	M60R3 1570 20 HDG	700	450	10.09	1
M60R3 1575 15 HDG	750	450	7.87	1	M60R3 1575 20 HDG	750	450	10.50	1
M60R3 1580 15 HDG	800	450	8.18	1	M60R3 1580 20 HDG	800	450	10.90	1
M60R3 1590 15 HDG	900	450	9.61	1	M60R3 1590 20 HDG	900	450	12.81	1
M60R3 1500 15 HDG	1000	450	10.31	1	M60R3 1500 20 HDG	1000	450	13.75	1
M60R3 1502 15 HDG	1200	450	11.71	1	M60R3 1502 20 HDG	1200	450	15.61	1

60° Horizontal Bend of Cable Ladder Radius:600

60° Merdiven Yatay Dönüş Elemanı R:600 - Угол кабельроста горизонтальный 60° радиус:600




Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8


Hot-Dip Galvanized

M60R4... H150					M60R4... H150				
1.5mm					2.0mm				
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	CODE	Width a=b mm	Radius R mm	kg 1pc	pcs
M60R4 1510 15 HDG	100	600	4.64	1	M60R4 1510 20 HDG	100	600	6.19	1
M60R4 1515 15 HDG	150	600	4.95	1	M60R4 1515 20 HDG	150	600	6.60	1
M60R4 1520 15 HDG	200	600	5.25	1	M60R4 1520 20 HDG	200	600	7.00	1
M60R4 1525 15 HDG	250	600	5.56	1	M60R4 1525 20 HDG	250	600	7.41	1
M60R4 1530 15 HDG	300	600	5.86	1	M60R4 1530 20 HDG	300	600	7.81	1
M60R4 1540 15 HDG	400	600	6.47	1	M60R4 1540 20 HDG	400	600	8.62	1
M60R4 1545 15 HDG	450	600	6.77	1	M60R4 1545 20 HDG	450	600	9.03	1
M60R4 1550 15 HDG	500	600	7.08	1	M60R4 1550 20 HDG	500	600	9.43	1
M60R4 1560 15 HDG	600	600	8.23	1	M60R4 1560 20 HDG	600	600	10.98	1
M60R4 1570 15 HDG	700	600	8.93	1	M60R4 1570 20 HDG	700	600	11.91	1
M60R4 1575 15 HDG	750	600	9.28	1	M60R4 1575 20 HDG	750	600	12.38	1
M60R4 1580 15 HDG	800	600	9.63	1	M60R4 1580 20 HDG	800	600	12.84	1
M60R4 1590 15 HDG	900	600	10.33	1	M60R4 1590 20 HDG	900	600	13.78	1
M60R4 1500 15 HDG	1000	600	11.95	1	M60R4 1500 20 HDG	1000	600	15.93	1
M60R4 1502 15 HDG	1200	600	13.53	1	M60R4 1502 20 HDG	1200	600	18.04	1

M60R3 H150 HDG

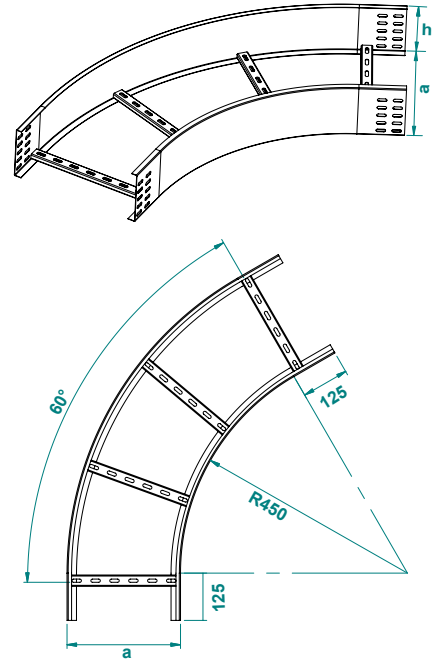

M60R4 H150 HDG

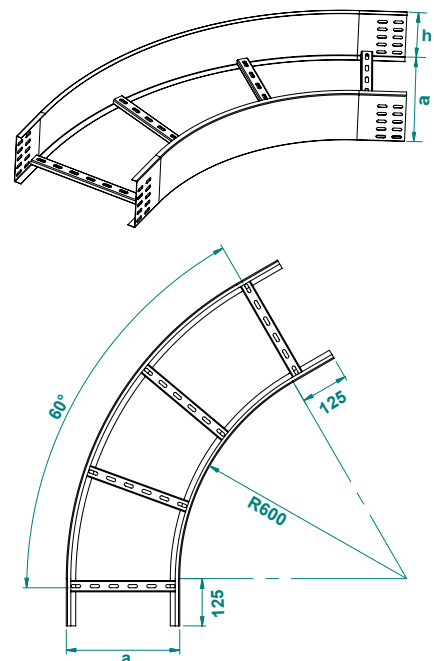

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0

45° Horizontal Bend of Cable Ladder

45° Merdiven Yatay Dönüş Elemanı - Угол кабельроста горизонтальный 45°



Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized

M45... H150		1.5mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
M45 1510 15 HDG	100	150	1.52	1	
M45 1515 15 HDG	150	150	1.71	1	
M45 1520 15 HDG	200	150	1.88	1	
M45 1525 15 HDG	250	150	2.05	1	
M45 1530 15 HDG	300	150	2.22	1	
M45 1540 15 HDG	400	150	2.56	1	
M45 1545 15 HDG	450	150	2.75	1	
M45 1550 15 HDG	500	150	2.92	1	
M45 1560 15 HDG	600	150	3.39	1	
M45 1570 15 HDG	700	150	3.64	1	
M45 1175 15 HDG	750	150	3.86	1	
M45 1580 15 HDG	800	150	4.02	1	
M45 1590 15 HDG	900	150	4.32	1	
M45 1500 15 HDG	1000	150	5.66	1	
M45 1502 15 HDG	1200	150	6.50	1	

M45... H150		2.0mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
M45 1510 20 HDG	100	150	2.03	1	
M45 1515 20 HDG	150	150	2.28	1	
M45 1520 20 HDG	200	150	2.51	1	
M45 1525 20 HDG	250	150	2.73	1	
M45 1530 20 HDG	300	150	2.96	1	
M45 1540 20 HDG	400	150	3.41	1	
M45 1545 20 HDG	450	150	3.67	1	
M45 1550 20 HDG	500	150	3.89	1	
M45 1560 20 HDG	600	150	4.52	1	
M45 1570 20 HDG	700	150	4.85	1	
M45 1575 20 HDG	750	150	5.14	1	
M45 1580 20 HDG	800	150	5.36	1	
M45 1590 20 HDG	900	150	5.76	1	
M45 1500 20 HDG	1000	150	7.54	1	
M45 1502 20 HDG	1200	150	8.67	1	

45° Horizontal Bend of Cable Ladder

45° Merdiven Yatay Dönüş Elemanı - Угол кабельроста горизонтальный 45°



Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized



M45R2... H150		1.5mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
M45R2 1510 15 HDG	100	300	2.60	1	
M45R2 1515 15 HDG	150	300	2.78	1	
M45R2 1520 15 HDG	200	300	3.15	1	
M45R2 1525 15 HDG	250	300	3.37	1	
M45R2 1530 15 HDG	300	300	3.60	1	
M45R2 1540 15 HDG	400	300	4.06	1	
M45R2 1545 15 HDG	450	300	4.29	1	
M45R2 1550 15 HDG	500	300	4.51	1	
M45R2 1560 15 HDG	600	300	4.97	1	
M45R2 1570 15 HDG	700	300	5.43	1	
M45R2 1575 15 HDG	750	300	5.65	1	
M45R2 1580 15 HDG	800	300	5.88	1	
M45R2 1590 15 HDG	900	300	6.34	1	
M45R2 1500 15 HDG	1000	300	7.71	1	
M45R2 1502 15 HDG	1200	300	8.81	1	

M45R2... H150		2.0mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
M45R2 1510 20 HDG	100	300	3.46	1	
M45R2 1515 20 HDG	150	300	3.71	1	
M45R2 1520 20 HDG	200	300	4.19	1	
M45R2 1525 20 HDG	250	300	4.50	1	
M45R2 1530 20 HDG	300	300	4.80	1	
M45R2 1540 20 HDG	400	300	5.41	1	
M45R2 1545 20 HDG	450	300	5.71	1	
M45R2 1550 20 HDG	500	300	6.02	1	
M45R2 1560 20 HDG	600	300	6.62	1	
M45R2 1570 20 HDG	700	300	7.23	1	
M45R2 1575 20 HDG	750	300	7.54	1	
M45R2 1580 20 HDG	800	300	7.84	1	
M45R2 1590 20 HDG	900	300	8.45	1	
M45R2 1500 20 HDG	1000	300	10.28	1	
M45R2 1502 20 HDG	1200	300	11.74	1	

M45 H150 HDG

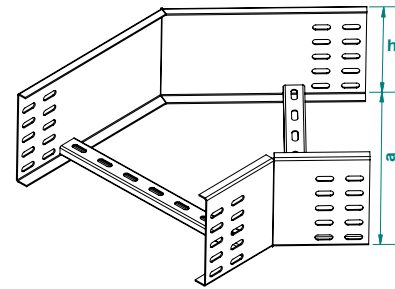

M45R2 H150 HDG

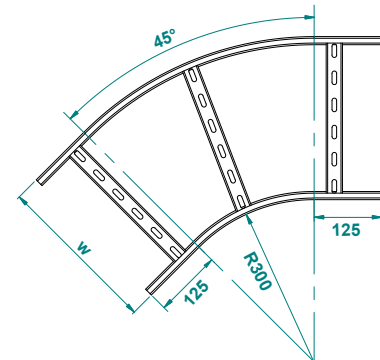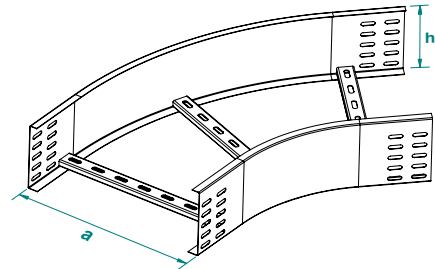

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method
to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0

45° Horizontal Bend of Cable Ladder Radius:450

45° Merdiven Yatay Dönüş Elemanı R:450 - Угол кабельроста горизонтальный 45° радиус:450



Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized

M45R3... H150					M45R3... H150				
1.5mm					2.0mm				
CODE	Width a=b mm	Radius R mm	KG 1pc	pcs	CODE	Width a=b mm	Radius R mm	KG 1pc	pcs
M45R3 1510 15 HDG	100	450	3.23	1	M45R3 1510 20 HDG	100	450	4.31	1
M45R3 1515 15 HDG	150	450	3.46	1	M45R3 1515 20 HDG	150	450	4.61	1
M45R3 1520 15 HDG	200	450	3.69	1	M45R3 1520 20 HDG	200	450	4.91	1
M45R3 1525 15 HDG	250	450	3.91	1	M45R3 15125 20 HDG	250	450	5.22	1
M45R3 1530 15 HDG	300	450	4.14	1	M45R3 1530 20 HDG	300	450	5.52	1
M45R3 1540 15 HDG	400	450	4.60	1	M45R3 1540 20 HDG	400	450	6.13	1
M45R3 1545 15 HDG	450	450	4.83	1	M45R3 1545 20 HDG	450	450	6.43	1
M45R3 1550 15 HDG	500	450	5.05	1	M45R3 1550 20 HDG	500	450	6.74	1
M45R3 1560 15 HDG	600	450	5.51	1	M45R3 1560 20 HDG	600	450	7.34	1
M45R3 1570 15 HDG	700	450	6.61	1	M45R3 1570 20 HDG	700	450	8.81	1
M45R3 1575 15 HDG	750	450	6.88	1	M45R3 1575 20 HDG	750	450	9.17	1
M45R3 1580 15 HDG	800	450	7.16	1	M45R3 1580 20 HDG	800	450	9.54	1
M45R3 1590 15 HDG	900	450	7.70	1	M45R3 1590 20 HDG	900	450	10.27	1
M45R3 1500 15 HDG	1000	450	8.25	1	M45R3 1500 20 HDG	1000	450	11.00	1
M45R3 1502 15 HDG	1200	450	9.35	1	M45R3 1502 20 HDG	1200	450	12.46	1

45° Horizontal Bend of Cable Ladder Radius:600

45° Merdiven Yatay Dönüş Elemanı R:600 - Угол кабельроста горизонтальный 45° радиус:600





Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8



Hot-Dip Galvanized

M45R4... H150					M45R4... H150				
1.5mm					2.0mm				
CODE	Width a=b mm	Radius R mm	KG 1pc	pcs	CODE	Width a=b mm	Radius R mm	KG 1pc	pcs
M45R4 1510 15 HDG	100	600	3.77	1	M45R4 1510 20 HDG	100	600	5.03	1
M45R4 1515 15 HDG	150	600	4.00	1	M45R4 1515 20 HDG	150	600	5.33	1
M45R4 1520 15 HDG	200	600	4.23	1	M45R4 1520 20 HDG	200	600	5.64	1
M45R4 1525 15 HDG	250	600	4.46	1	M45R4 1525 20 HDG	250	600	5.94	1
M45R4 1530 15 HDG	300	600	4.68	1	M45R4 1530 20 HDG	300	600	6.24	1
M45R4 1540 15 HDG	400	600	5.51	1	M45R4 1540 20 HDG	400	600	7.34	1
M45R4 1545 15 HDG	450	600	5.78	1	M45R4 1545 20 HDG	450	600	7.71	1
M45R4 1550 15 HDG	500	600	6.05	1	M45R4 1550 20 HDG	500	600	8.07	1
M45R4 1560 15 HDG	600	600	6.60	1	M45R4 1560 20 HDG	600	600	8.80	1
M45R4 1570 15 HDG	700	600	7.15	1	M45R4 1570 20 HDG	700	600	9.53	1
M45R4 1575 15 HDG	750	600	7.42	1	M45R4 1575 20 HDG	750	600	9.90	1
M45R4 1580 15 HDG	800	600	7.70	1	M45R4 1580 20 HDG	800	600	10.26	1
M45R4 1590 15 HDG	900	600	8.24	1	M45R4 1590 20 HDG	900	600	10.99	1
M45R4 1500 15 HDG	1000	600	9.71	1	M45R4 1500 20 HDG	1000	600	12.95	1
M45R4 1502 15 HDG	1200	600	10.99	1	M45R4 1502 20 HDG	1200	600	14.65	1

M45R3 H150 HDG

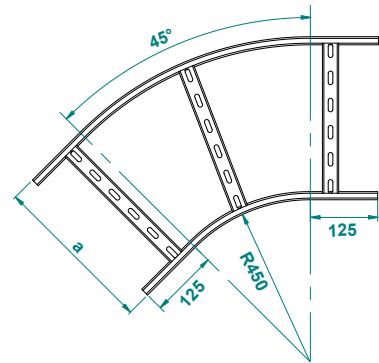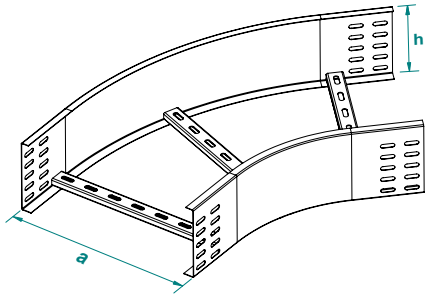

M45R4 H150 HDG

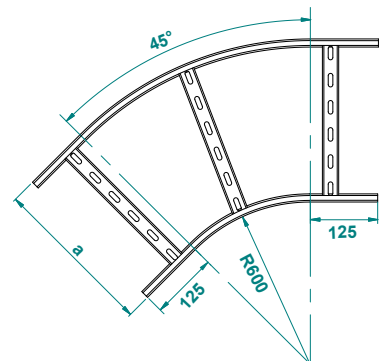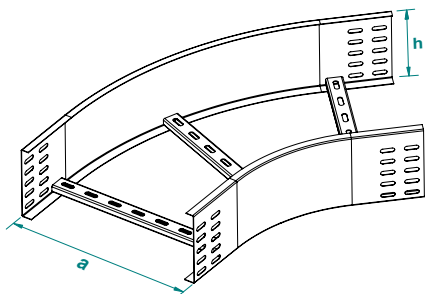

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0

30° Horizontal Bend of Cable Ladder

30° Merdiven Yatay Dönüş Elemanı - Угол кабельроста горизонтальный 30°



Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized

M30... H150		1.5mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
M30 1510 15 HDG	100	150	1.46	1	
M30 1515 15 HDG	150	150	1.60	1	
M30 1520 15 HDG	200	150	1.73	1	
M30 1525 15 HDG	250	150	1.88	1	
M30 1530 15 HDG	300	150	2.02	1	
M30 1540 15 HDG	400	150	2.30	1	
M30 1545 15 HDG	450	150	2.45	1	
M30 1550 15 HDG	500	150	2.57	1	
M30 1560 15 HDG	600	150	2.85	1	
M30 1570 15 HDG	700	150	3.14	1	
M30 1575 15 HDG	750	150	3.27	1	
M30 1580 15 HDG	800	150	3.42	1	
M30 1590 15 HDG	900	150	3.69	1	
M30 1500 15 HDG	1000	150	3.96	1	
M30 1502 15 HDG	1200	150	4.53	1	

M30... H150		2.0mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
M30 1510 20 HDG	100	150	1.94	1	
M30 1515 20 HDG	150	150	2.14	1	
M30 1520 20 HDG	200	150	2.30	1	
M30 1525 20 HDG	250	150	2.50	1	
M30 1530 20 HDG	300	150	2.70	1	
M30 1540 20 HDG	400	150	3.06	1	
M30 1545 20 HDG	450	150	3.26	1	
M30 1550 20 HDG	500	150	3.43	1	
M30 1560 20 HDG	600	150	3.79	1	
M30 1570 20 HDG	700	150	4.19	1	
M30 1575 20 HDG	750	150	4.35	1	
M30 1580 20 HDG	800	150	4.55	1	
M30 1590 20 HDG	900	150	4.92	1	
M30 1500 20 HDG	1000	150	5.28	1	
M30 1502 20 HDG	1200	150	6.04	1	

30° Horizontal Bend of Cable Ladder Radius:300

30° Merdiven Yatay Dönüş Elemanı R:300 - Угол кабельроста горизонтальный 30° радиус:300



Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized



M30R2... H150		1.5mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
M30R2 1510 15 HDG	100	300	2.18	1	
M30R2 1515 15 HDG	150	300	2.33	1	
M30R2 1520 15 HDG	200	300	2.48	1	
M30R2 1525 15 HDG	250	300	2.63	1	
M30R2 1530 15 HDG	300	300	2.79	1	
M30R2 1540 15 HDG	400	300	3.09	1	
M30R2 1545 15 HDG	450	300	3.24	1	
M30R2 1550 15 HDG	500	300	3.39	1	
M30R2 1560 15 HDG	600	300	4.25	1	
M30R2 1570 15 HDG	700	300	4.64	1	
M30R2 1575 15 HDG	750	300	4.84	1	
M30R2 1580 15 HDG	800	300	5.04	1	
M30R2 1590 15 HDG	900	300	5.44	1	
M30R2 1500 15 HDG	1000	300	5.83	1	
M30R2 1502 15 HDG	1200	300	6.62	1	

M30R2... H150		2.0mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
M30R2 1510 20 HDG	100	300	2.90	1	
M30R2 1515 20 HDG	150	300	3.10	1	
M30R2 1520 20 HDG	200	300	3.31	1	
M30R2 1525 20 HDG	250	300	3.51	1	
M30R2 1530 20 HDG	300	300	3.71	1	
M30R2 1540 20 HDG	400	300	4.12	1	
M30R2 1545 20 HDG	450	300	4.32	1	
M30R2 1550 20 HDG	500	300	4.52	1	
M30R2 1560 20 HDG	600	300	5.66	1	
M30R2 1570 20 HDG	700	300	6.19	1	
M30R2 1575 20 HDG	750	300	6.45	1	
M30R2 1580 20 HDG	800	300	6.72	1	
M30R2 1590 20 HDG	900	300	7.25	1	
M30R2 1500 20 HDG	1000	300	7.77	1	
M30R2 1502 20 HDG	1200	300	8.83	1	

M30 H150 HDG

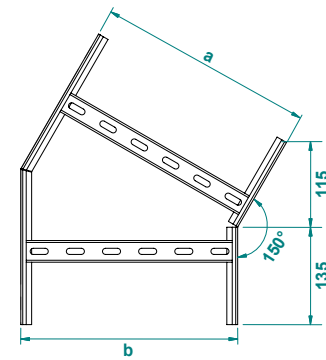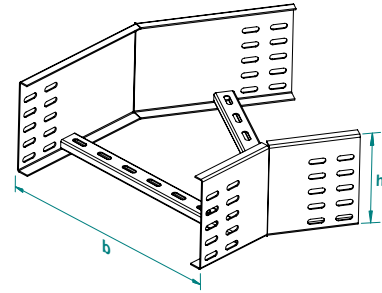

M30R2 H150 HDG

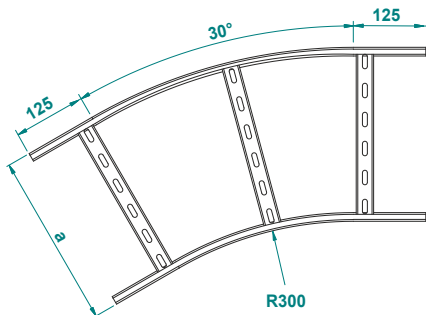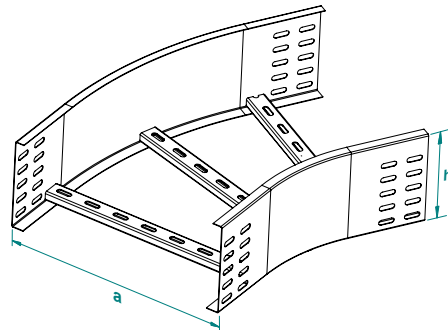

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method

to TS-EN 10346:2011 (PG)

SS- stainless steel AISI 304L and AISI 316L (SS)

EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0

Cable Ladder Systems of Side Height 150



MTK
MADE IN TURKEY

30° Horizontal Bend of Cable Ladder Radius:450

30° Merdiven Yatay Dönüş Elemanı R:450 - Угол кабельроста горизонтальный 30° радиус:450



Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized

M30R3... H150		1.5mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
M30R3 1510 15 HDG	100	450	2.54	1	
M30R3 1515 15 HDG	150	450	2.69	1	
M30R3 1520 15 HDG	200	450	2.84	1	
M30R3 1525 15 HDG	250	450	3.22	1	
M30R3 1530 15 HDG	300	450	3.42	1	
M30R3 1540 15 HDG	400	450	3.82	1	
M30R3 1545 15 HDG	450	450	4.02	1	
M30R3 1550 15 HDG	500	450	4.21	1	
M30R3 1560 15 HDG	600	450	4.61	1	
M30R3 1570 15 HDG	700	450	5.00	1	
M30R3 1575 15 HDG	750	450	5.20	1	
M30R3 1580 15 HDG	800	450	5.40	1	
M30R3 1590 15 HDG	900	450	5.80	1	
M30R3 1500 15 HDG	1000	450	6.19	1	
M30R3 1502 15 HDG	1200	450	6.98	1	

M30R3... H150		2.0mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
M30R3 1510 20 HDG	100	450	3.38	1	
M30R3 1515 20 HDG	150	450	3.59	1	
M30R3 1520 20 HDG	200	450	3.79	1	
M30R3 1525 20 HDG	250	450	4.30	1	
M30R3 1530 20 HDG	300	450	4.56	1	
M30R3 1540 20 HDG	400	450	5.09	1	
M30R3 1545 20 HDG	450	450	5.35	1	
M30R3 1550 20 HDG	500	450	5.62	1	
M30R3 1560 20 HDG	600	450	6.14	1	
M30R3 1570 20 HDG	700	450	6.67	1	
M30R3 1575 20 HDG	750	450	6.93	1	
M30R3 1580 20 HDG	800	450	7.20	1	
M30R3 1590 20 HDG	900	450	7.73	1	
M30R3 1500 20 HDG	1000	450	8.25	1	
M30R3 1502 20 HDG	1200	450	9.31	1	

30° Horizontal Bend of Cable Ladder Radius:600

30° Merdiven Yatay Dönüş Elemanı R:600 - Угол кабельроста горизонтальный 30° радиус:600



Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized



M30R4... H150		1.5mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
M30R4 1510 15 HDG	100	600	2.99	1	
M30R4 1515 15 HDG	150	600	3.19	1	
M30R4 1520 15 HDG	200	600	3.39	1	
M30R4 1525 15 HDG	250	600	3.58	1	
M30R4 1530 15 HDG	300	600	3.78	1	
M30R4 1540 15 HDG	400	600	4.18	1	
M30R4 1545 15 HDG	450	600	4.38	1	
M30R4 1550 15 HDG	500	600	4.57	1	
M30R4 1560 15 HDG	600	600	4.97	1	
M30R4 1570 15 HDG	700	600	5.36	1	
M30R4 1575 15 HDG	750	600	5.56	1	
M30R4 1580 15 HDG	800	600	5.76	1	
M30R4 1590 15 HDG	900	600	6.16	1	
M30R4 1500 15 HDG	1000	600	6.55	1	
M30R4 1502 15 HDG	1200	600	8.45	1	

M30R4... H150		2.0mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
M30R4 1510 20 HDG	100	600	3.99	1	
M30R4 1515 20 HDG	150	600	4.25	1	
M30R4 1520 20 HDG	200	600	4.51	1	
M30R4 1525 20 HDG	250	600	4.78	1	
M30R4 1530 20 HDG	300	600	5.04	1	
M30R4 1540 20 HDG	400	600	5.57	1	
M30R4 1545 20 HDG	450	600	5.83	1	
M30R4 1550 20 HDG	500	600	6.10	1	
M30R4 1560 20 HDG	600	600	6.62	1	
M30R4 1570 20 HDG	700	600	7.15	1	
M30R4 1575 20 HDG	750	600	7.42	1	
M30R4 1580 20 HDG	800	600	7.68	1	
M30R4 1590 20 HDG	900	600	8.21	1	
M30R4 1500 20 HDG	1000	600	8.73	1	
M30R4 1502 20 HDG	1200	600	11.26	1	

M30R3 H150 HDG

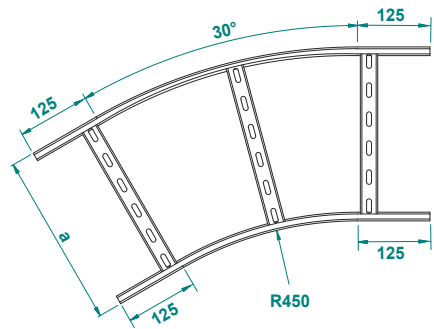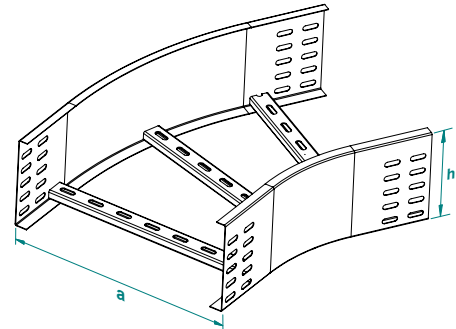

M30R4 H150 HDG

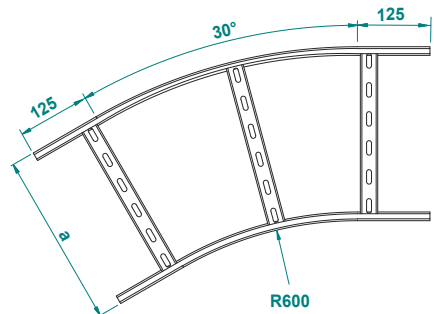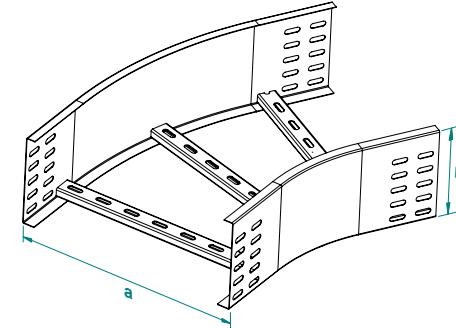

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0

Tee Horizontal Bend of Cable Ladder

"T" Merdiven Yatay Dönüş Elemanı - T-отвод кабельроста горизонтальный



Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized

MT... H150		1.5mm			
CODE	Width a=b=c mm	Radius R mm	kg 1pc	pcs	
MT 1510 15 HDG	100	150	3.19	1	
MT 1515 15 HDG	150	150	3.43	1	
MT 1520 15 HDG	200	150	3.66	1	
MT 1525 15 HDG	250	150	4.43	1	
MT 1530 15 HDG	300	150	4.74	1	
MT 1540 15 HDG	400	150	5.37	1	
MT 1545 15 HDG	450	150	5.69	1	
MT 1550 15 HDG	500	150	6.00	1	
MT 1560 15 HDG	600	150	6.33	1	
MT 1570 15 HDG	700	150	7.92	1	
MT 1575 15 HDG	750	150	8.28	1	
MT 1580 15 HDG	800	150	8.63	1	
MT 1590 15 HDG	900	150	9.35	1	
MT 1500 15 HDG	1000	150	10.96	1	
MT 1502 15 HDG	1200	150	12.64	1	

MT... H150		2.0mm			
CODE	Width a=b=c mm	Radius R mm	kg 1pc	pcs	
MT 1510 20 HDG	100	150	4.26	1	
MT 1515 20 HDG	150	150	4.57	1	
MT 1520 20 HDG	200	150	4.88	1	
MT 1525 20 HDG	250	150	5.90	1	
MT 1530 20 HDG	300	150	6.32	1	
MT 1540 20 HDG	400	150	7.16	1	
MT 1545 20 HDG	450	150	7.58	1	
MT 1550 20 HDG	500	150	8.00	1	
MT 1560 20 HDG	600	150	8.84	1	
MT 1570 20 HDG	700	150	10.56	1	
MT 1575 20 HDG	750	150	11.03	1	
MT 1580 20 HDG	800	150	11.51	1	
MT 1590 20 HDG	900	150	12.46	1	
MT 1500 20 HDG	1000	150	14.62	1	
MT 1502 20 HDG	1200	150	16.85	1	

Tee Horizontal Bend of Cable Ladder Radius:300

"T" Merdiven Yatay Dönüş Elemanı R:300 - T-отвод кабельроста горизонтальный радиус:300



Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized



MTR2... H150		1.5mm			
CODE	Width a=b=c mm	Radius R mm	kg 1pc	pcs	
MTR2 1510 15 HDG	100	300	6.53	1	
MTR2 1515 15 HDG	150	300	7.01	1	
MTR2 1520 15 HDG	200	300	7.49	1	
MTR2 1525 15 HDG	250	300	7.74	1	
MTR2 1530 15 HDG	300	300	8.13	1	
MTR2 1540 15 HDG	400	300	8.96	1	
MTR2 1545 15 HDG	450	300	9.35	1	
MTR2 1550 15 HDG	500	300	9.74	1	
MTR2 1560 15 HDG	600	300	11.26	1	
MTR2 1570 15 HDG	700	300	12.22	1	
MTR2 1575 15 HDG	750	300	12.66	1	
MTR2 1580 15 HDG	800	300	13.09	1	
MTR2 1590 15 HDG	900	300	13.97	1	
MTR2 1500 15 HDG	1000	300	16.54	1	
MTR2 1502 15 HDG	1200	300	18.47	1	

MTR2... H150		2.0mm			
CODE	Width a=b=c mm	Radius R mm	kg 1pc	pcs	
MTR2 1510 20 HDG	100	300	8.70	1	
MTR2 1515 20 HDG	150	300	9.34	1	
MTR2 1520 20 HDG	200	300	9.99	1	
MTR2 1525 20 HDG	250	300	10.32	1	
MTR2 1530 20 HDG	300	300	10.84	1	
MTR2 1540 20 HDG	400	300	11.94	1	
MTR2 1545 20 HDG	450	300	12.47	1	
MTR2 1550 20 HDG	500	300	12.99	1	
MTR2 1560 20 HDG	600	300	15.01	1	
MTR2 1570 20 HDG	700	300	16.29	1	
MTR2 1575 20 HDG	750	300	16.87	1	
MTR2 1580 20 HDG	800	300	17.46	1	
MTR2 1590 20 HDG	900	300	18.62	1	
MTR2 1500 20 HDG	1000	300	22.05	1	
MTR2 1502 20 HDG	1200	300	24.62	1	

MT H150 HDG

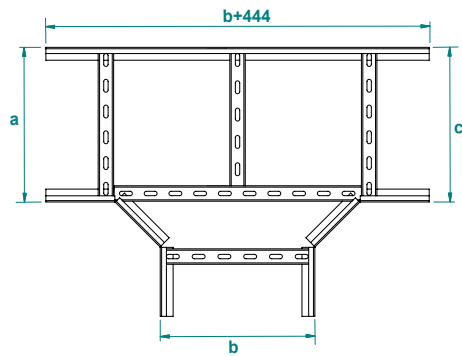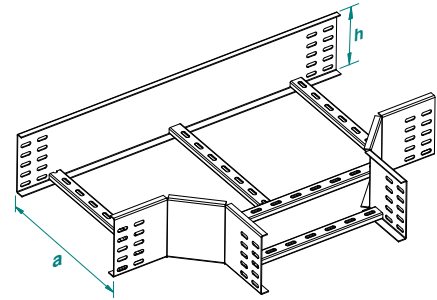

MTR2 H150 HDG

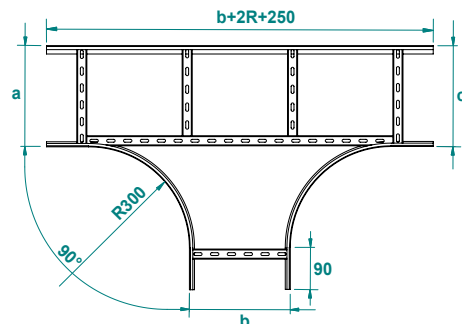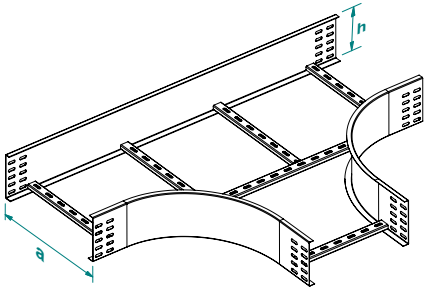

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)


Available finishes:

Steel, strip-galv. acc. to the Sendzimir method
to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0

Tee Horizontal Bend of Cable Ladder Radius:450

"T" Merdiven Yatay Dönüş Elemanı R:450 - T-отвод кабельроста горизонтальный радиус:450

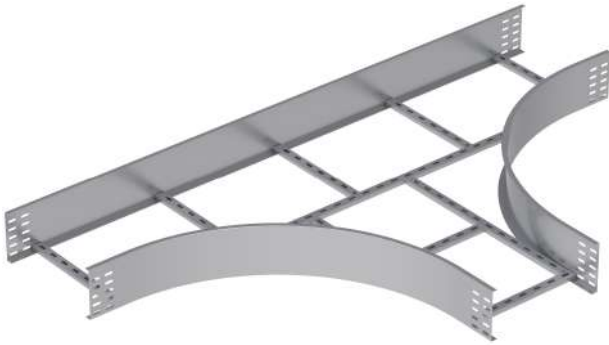

Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8


Hot-Dip Galvanized

MTR3... H150		1.5mm			
CODE	Width a=b=c mm	Radius R mm	kg 1pc	pcs	
MTR3 1510 15 HDG	100	450	8.48	1	
MTR3 1515 15 HDG	150	450	8.87	1	
MTR3 1520 15 HDG	200	450	9.76	1	
MTR3 1525 15 HDG	250	450	10.84	1	
MTR3 1530 15 HDG	300	450	11.51	1	
MTR3 1540 15 HDG	400	450	12.47	1	
MTR3 1545 15 HDG	450	450	12.96	1	
MTR3 1550 15 HDG	500	450	13.44	1	
MTR3 1560 15 HDG	600	450	14.91	1	
MTR3 1570 15 HDG	700	450	15.96	1	
MTR3 1575 15 HDG	750	450	16.37	1	
MTR3 1580 15 HDG	800	450	17.16	1	
MTR3 1590 15 HDG	900	450	18.49	1	
MTR3 1500 15 HDG	1000	450	20.37	1	
MTR3 1502 15 HDG	1200	450	22.76	1	

MTR3... H150		2.0mm			
CODE	Width a=b=c mm	Radius R mm	kg 1pc	pcs	
MTR3 1510 20 HDG	100	450	11.30	1	
MTR3 1515 20 HDG	150	450	11.82	1	
MTR3 1520 20 HDG	200	450	13.02	1	
MTR3 1525 20 HDG	250	450	14.46	1	
MTR3 1530 20 HDG	300	450	15.34	1	
MTR3 1540 20 HDG	400	450	16.63	1	
MTR3 1545 20 HDG	450	450	17.27	1	
MTR3 1550 20 HDG	500	450	17.91	1	
MTR3 1560 20 HDG	600	450	19.87	1	
MTR3 1570 20 HDG	700	450	21.28	1	
MTR3 1575 20 HDG	750	450	21.74	1	
MTR3 1580 20 HDG	800	450	22.87	1	
MTR3 1590 20 HDG	900	450	24.65	1	
MTR3 1500 20 HDG	1000	450	27.16	1	
MTR3 1502 20 HDG	1200	450	30.34	1	

Tee Horizontal Bend of Cable Ladder Radius:600

"T" Merdiven Yatay Dönüş Elemanı R:600 - T-отвод кабельроста горизонтальный радиус:600

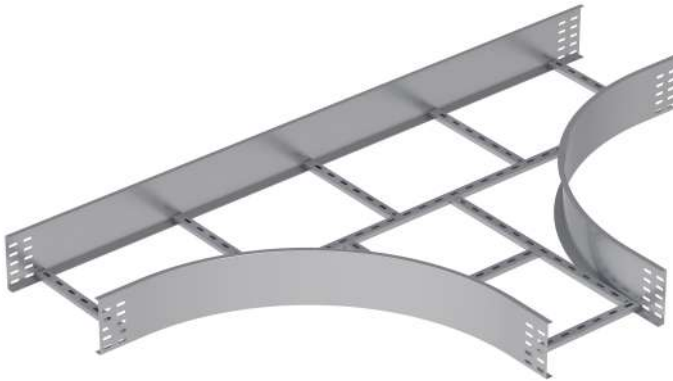

Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized



MTR4... H150		1.5mm			
CODE	Width a=b=c mm	Radius R mm	kg 1pc	pcs	
MTR4 1510 15 HDG	100	600	10.07	1	
MTR4 1515 15 HDG	150	600	12.01	1	
MTR4 1520 15 HDG	200	600	12.50	1	
MTR4 1525 15 HDG	250	600	12.96	1	
MTR4 1530 15 HDG	300	600	13.83	1	
MTR4 1540 15 HDG	400	600	15.11	1	
MTR4 1545 15 HDG	450	600	15.64	1	
MTR4 1550 15 HDG	500	600	16.17	1	
MTR4 1560 15 HDG	600	600	17.23	1	
MTR4 1570 15 HDG	700	600	18.28	1	
MTR4 1575 15 HDG	750	600	18.81	1	
MTR4 1580 15 HDG	800	600	19.94	1	
MTR4 1590 15 HDG	900	600	21.73	1	
MTR4 1500 15 HDG	1000	600	22.87	1	
MTR4 1502 15 HDG	1200	600	25.17	1	

MTR4... H150		2.0mm			
CODE	Width a=b=c mm	Radius R mm	kg 1pc	pcs	
MTR4 1510 20 HDG	100	600	14.27	1	
MTR4 1515 20 HDG	150	600	16.02	1	
MTR4 1520 20 HDG	200	600	16.66	1	
MTR4 1525 20 HDG	250	600	17.28	1	
MTR4 1530 20 HDG	300	600	18.44	1	
MTR4 1540 20 HDG	400	600	20.15	1	
MTR4 1545 20 HDG	450	600	20.85	1	
MTR4 1550 20 HDG	500	600	21.56	1	
MTR4 1560 20 HDG	600	600	22.97	1	
MTR4 1570 20 HDG	700	600	24.37	1	
MTR4 1575 20 HDG	750	600	25.08	1	
MTR4 1580 20 HDG	800	600	26.58	1	
MTR4 1590 20 HDG	900	600	28.97	1	
MTR4 1500 20 HDG	1000	600	30.50	1	
MTR4 1502 20 HDG	1200	600	33.56	1	

MTR3 H150 HDG

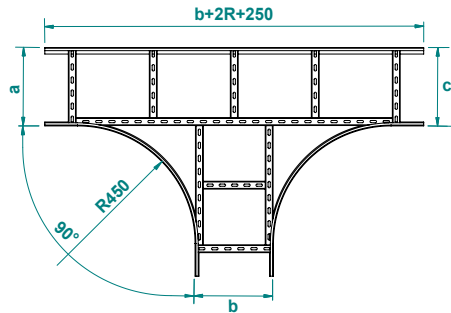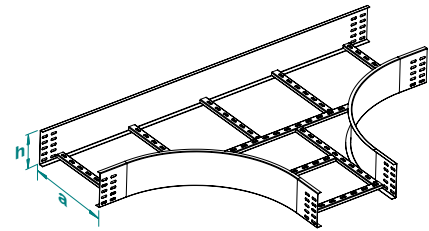

MTR4 H150 HDG

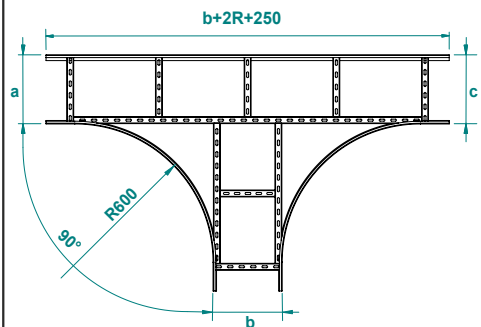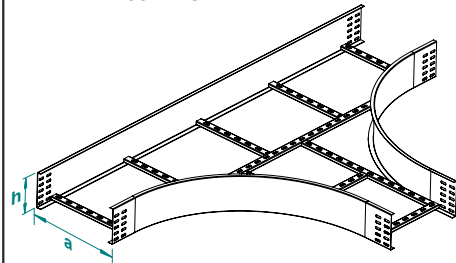

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method

to TS-EN 10346:2011 (PG)

SS- stainless steel AISI 304L and AISI 316L (SS)

EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0

Cable Ladder Systems of Side Height 150



MTK
MADE IN TURKEY

Cross Bend of Cable Ladder

Dörtlü Merdiven Dönüş Elemanı - Крестовина кабельроста



Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8


Hot-Dip Galvanized

MD... H150		1.5mm			
CODE	Width a=b=c=d mm	Radius R mm	kg 1pc	pcs	
MD 1510 15 HDG	100	150	3.82	1	
MD 1515 15 HDG	150	150	3.98	1	
MD 1520 15 HDG	200	150	4.15	1	
MD 1525 15 HDG	250	150	4.97	1	
MD 1530 15 HDG	300	150	5.47	1	
MD 1540 15 HDG	400	150	6.05	1	
MD 1545 15 HDG	450	150	6.33	1	
MD 1550 15 HDG	500	150	6.62	1	
MD 1560 15 HDG	600	150	7.82	1	
MD 1570 15 HDG	700	150	9.05	1	
MD 1575 15 HDG	750	150	9.51	1	
MD 1580 15 HDG	800	150	9.84	1	
MD 1590 15 HDG	900	150	11.49	1	
MD 1500 15 HDG	1000	150	12.47	1	
MD 1502 15 HDG	1200	150	16.06	1	

MD... H150		2.0mm			
CODE	Width a=b=c=d mm	Radius R mm	kg 1pc	pcs	
MD 1510 20 HDG	100	150	5.09	1	
MD 1515 20 HDG	150	150	5.31	1	
MD 1520 20 HDG	200	150	5.53	1	
MD 1525 20 HDG	250	150	6.63	1	
MD 1530 20 HDG	300	150	7.29	1	
MD 1540 20 HDG	400	150	8.06	1	
MD 1545 20 HDG	450	150	8.44	1	
MD 1550 20 HDG	500	150	8.83	1	
MD 1560 20 HDG	600	150	10.42	1	
MD 1570 20 HDG	700	150	12.07	1	
MD 1575 20 HDG	750	150	12.67	1	
MD 1580 20 HDG	800	150	13.11	1	
MD 1590 20 HDG	900	150	15.31	1	
MD 1500 20 HDG	1000	150	16.63	1	
MD 1502 20 HDG	1200	150	21.41	1	

Cross Bend of Cable Ladder Radius:300

Dörtlü Merdiven Dönüş Elemanı R:300 - Крестовина кабельроста радиус:300

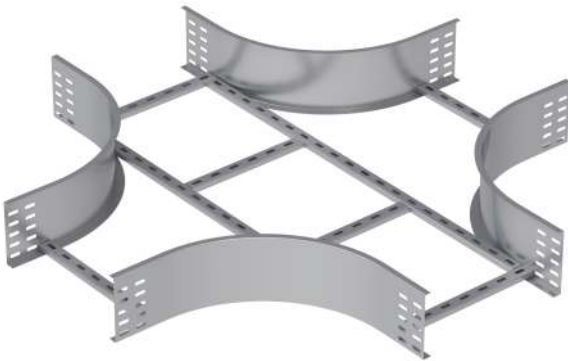

Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized



MDR2... H150		1.5mm			
CODE	Width a=b=c=d mm	Radius R mm	kg 1pc	pcs	
MDR2 1510 15 HDG	100	300	8.29	1	
MDR2 1515 15 HDG	150	300	8.57	1	
MDR2 1520 15 HDG	200	300	9.12	1	
MDR2 1525 15 HDG	250	300	9.49	1	
MDR2 1530 15 HDG	300	300	9.86	1	
MDR2 1540 15 HDG	400	300	10.68	1	
MDR2 1545 15 HDG	450	300	11.05	1	
MDR2 1550 15 HDG	500	300	11.42	1	
MDR2 1560 15 HDG	600	300	14.17	1	
MDR2 1570 15 HDG	700	300	15.09	1	
MDR2 1575 15 HDG	750	300	15.55	1	
MDR2 1580 15 HDG	800	300	16.10	1	
MDR2 1590 15 HDG	900	300	17.48	1	
MDR2 1500 15 HDG	1000	300	21.34	1	
MDR2 1502 15 HDG	1200	300	23.40	1	

MDR2... H150		2.0mm			
CODE	Width a=b=c=d mm	Radius R mm	kg 1pc	pcs	
MDR2 1510 20 HDG	100	300	11.06	1	
MDR2 1515 20 HDG	150	300	11.42	1	
MDR2 1520 20 HDG	200	300	12.16	1	
MDR2 1525 20 HDG	250	300	12.65	1	
MDR2 1530 20 HDG	300	300	13.14	1	
MDR2 1540 20 HDG	400	300	14.24	1	
MDR2 1545 20 HDG	450	300	14.73	1	
MDR2 1550 20 HDG	500	300	15.22	1	
MDR2 1560 20 HDG	600	300	18.89	1	
MDR2 1570 20 HDG	700	300	20.12	1	
MDR2 1575 20 HDG	750	300	20.73	1	
MDR2 1580 20 HDG	800	300	21.47	1	
MDR2 1590 20 HDG	900	300	23.30	1	
MDR2 1500 20 HDG	1000	300	28.45	1	
MDR2 1502 20 HDG	1200	300	31.20	1	

MD H150 HDG

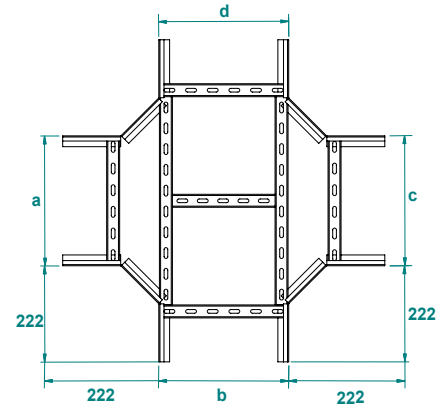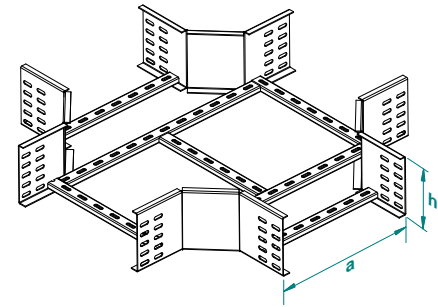

MDR2 H150 HDG

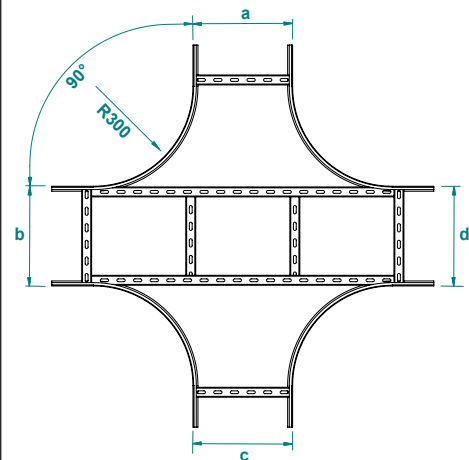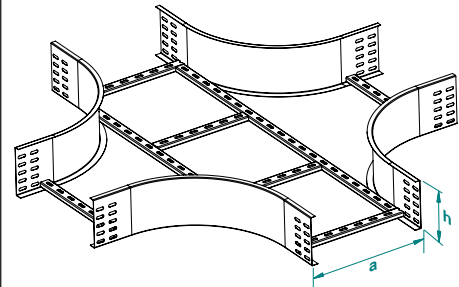

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method

to TS-EN 10346:2011 (PG)


SS- stainless steel AISI 304L and AISI 316L (SS)

EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0

Cross Bend of Cable Ladder Radius:450

Dörtlülü Merdiven Dönüş Elemanı R:450 - Крестовина кабельроста радиус:450

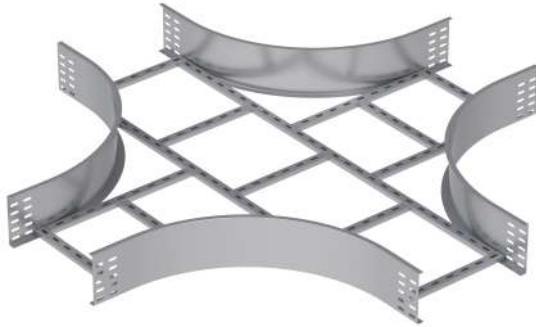

Important!


To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized

MDR3... H150					MDR3... H150				
1.5mm					2.0mm				
CODE	Width a=b=c=d mm	Radius R mm	kg 1pc	pcs	CODE	Width a=b=c=d mm	Radius R mm	kg 1pc	pcs
MDR3 1510 15 HDG	100	450	10.77	1	MDR3 1510 20 HDG	100	450	14.36	1
MDR3 1515 15 HDG	150	450	12.38	1	MDR3 1515 20 HDG	150	450	16.51	1
MDR3 1520 15 HDG	200	450	12.89	1	MDR3 1520 20 HDG	200	450	17.18	1
MDR3 1525 15 HDG	250	450	14.22	1	MDR3 1525 20 HDG	250	450	18.96	1
MDR3 1530 15 HDG	300	450	14.91	1	MDR3 1530 20 HDG	300	450	19.87	1
MDR3 1540 15 HDG	400	450	15.92	1	MDR3 1540 20 HDG	400	450	21.22	1
MDR3 1545 15 HDG	450	450	16.42	1	MDR3 1545 20 HDG	450	450	21.89	1
MDR3 1550 15 HDG	500	450	18.17	1	MDR3 1550 20 HDG	500	450	24.22	1
MDR3 1560 15 HDG	600	450	19.27	1	MDR3 1560 20 HDG	600	450	25.69	1
MDR3 1570 15 HDG	700	450	20.92	1	MDR3 1570 20 HDG	700	450	27.90	1
MDR3 1575 15 HDG	750	450	21.52	1	MDR3 1575 20 HDG	750	450	28.69	1
MDR3 1580 15 HDG	800	450	22.94	1	MDR3 1580 20 HDG	800	450	30.59	1
MDR3 1590 15 HDG	900	450	25.65	1	MDR3 1590 20 HDG	900	450	34.20	1
MDR3 1500 15 HDG	1000	450	26.94	1	MDR3 1500 20 HDG	1000	450	35.92	1
MDR3 1502 15 HDG	1200	450	30.47	1	MDR3 1502 20 HDG	1200	450	40.63	1

Cross Bend of Cable Ladder Radius:600

Dörtlülü Merdiven Dönüş Elemanı R:600 - Крестовина кабельроста радиус:600

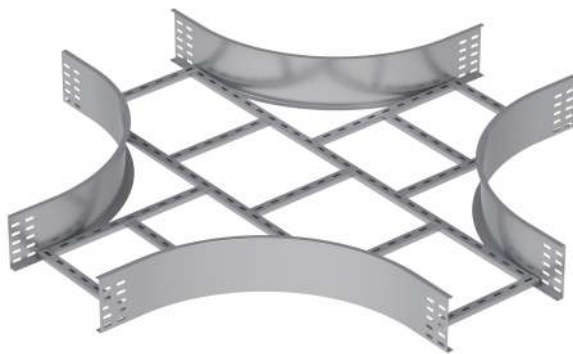



Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8



Hot-Dip Galvanized

MDR4... H150					MDR4... H150				
1.5mm					2.0mm				
CODE	Width a=b=c=d mm	Radius R mm	kg 1pc	pcs	CODE	Width a=b=c=d mm	Radius R mm	kg 1pc	pcs
MDR4 1510 15 HDG	100	600	13.80	1	MDR4 1510 20 HDG	100	600	18.40	1
MDR4 1515 15 HDG	150	600	15.92	1	MDR4 1515 20 HDG	150	600	21.22	1
MDR4 1520 15 HDG	200	600	16.47	1	MDR4 1520 20 HDG	200	600	21.96	1
MDR4 1525 15 HDG	250	600	16.93	1	MDR4 1525 20 HDG	250	600	22.57	1
MDR4 1530 15 HDG	300	600	18.21	1	MDR4 1530 20 HDG	300	600	24.48	1
MDR4 1540 15 HDG	400	600	19.50	1	MDR4 1540 20 HDG	400	600	26.00	1
MDR4 1545 15 HDG	450	600	20.05	1	MDR4 1545 20 HDG	450	600	26.73	1
MDR4 1550 15 HDG	500	600	22.07	1	MDR4 1550 20 HDG	500	600	29.43	1
MDR4 1560 15 HDG	600	600	23.26	1	MDR4 1560 20 HDG	600	600	31.02	1
MDR4 1570 15 HDG	700	600	24.46	1	MDR4 1570 20 HDG	700	600	32.61	1
MDR4 1575 15 HDG	750	600	25.65	1	MDR4 1575 20 HDG	750	600	34.20	1
MDR4 1580 15 HDG	800	600	27.31	1	MDR4 1580 20 HDG	800	600	36.41	1
MDR4 1590 15 HDG	900	600	30.43	1	MDR4 1590 20 HDG	900	600	40.57	1
MDR4 1500 15 HDG	1000	600	31.81	1	MDR4 1500 20 HDG	1000	600	42.41	1
MDR4 1502 15 HDG	1200	600	34.61	1	MDR4 1502 20 HDG	1200	600	46.14	1

MDR3 H150 HDG

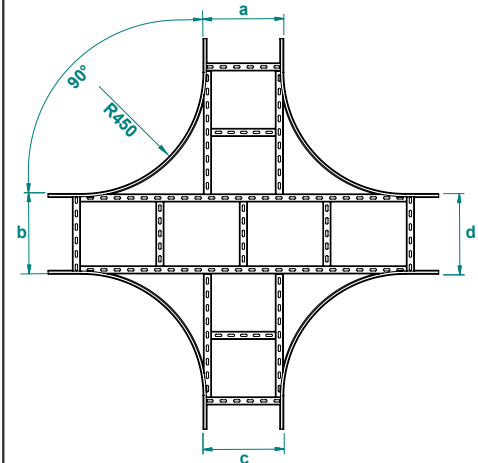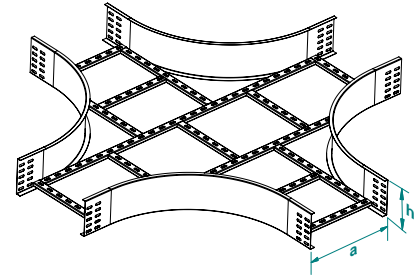

MDR4 H150 HDG

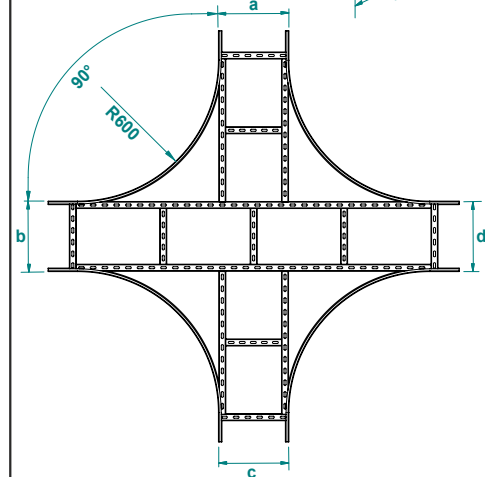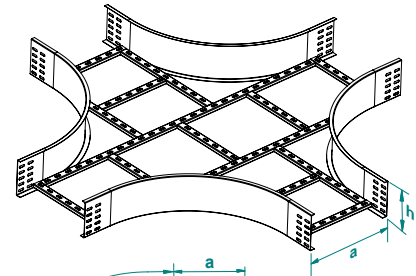

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method
to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0


Cable Ladder Systems of Side Height 150



MTK
MADE IN TURKEY

Middle Reducer Bend of Cable Ladder

Merdiven Ortadan Redüksiyon - Редукционный переходник кабельроста, симметричный

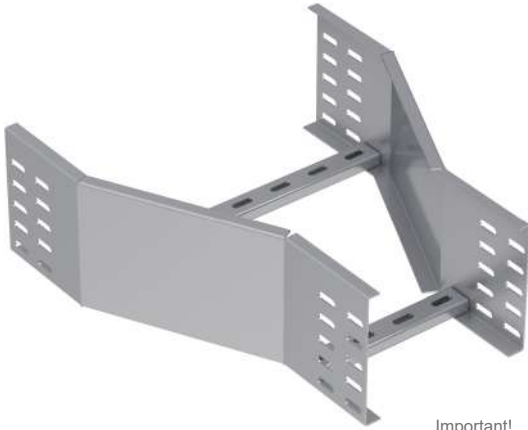

Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8



Hot-Dip Galvanized

ROSM... H150		1.5mm	
CODE	Width W1 mm	Width W2 mm	kg 1pc
ROSM 1515.10 15 HDG	150	100	2.39
ROSM 1520.15 15 HDG	200	150	2.47
ROSM 1520.10 15 HDG	200	100	2.43
ROSM 1525.20 15 HDG	250	200	2.55
ROSM 1525.15 15 HDG	250	150	2.51
ROSM 1525.10 15 HDG	250	100	2.47
ROSM 1530.25 15 HDG	300	250	2.64
ROSM 1530.20 15 HDG	300	200	2.60
ROSM 1530.15 15 HDG	300	150	2.55
ROSM 1530.10 15 HDG	300	100	2.51
ROSM 1540.30 15 HDG	400	300	2.76
ROSM 1540.25 15 HDG	400	250	2.72
ROSM 1540.20 15 HDG	400	200	2.68
ROSM 1540.15 15 HDG	400	150	2.64
ROSM 1540.10 15 HDG	400	100	2.60
ROSM 1545.40 15 HDG	450	400	2.88
ROSM 1545.30 15 HDG	450	300	2.80
ROSM 1545.25 15 HDG	450	250	2.76
ROSM 1545.20 15 HDG	450	200	2.72
ROSM 1545.15 15 HDG	450	150	2.68
ROSM 1545.10 15 HDG	450	100	2.64
ROSM 1550.45 15 HDG	500	450	2.97
ROSM 1550.40 15 HDG	500	400	2.93
ROSM 1550.30 15 HDG	500	300	2.84
ROSM 1550.25 15 HDG	500	250	2.80
ROSM 1550.20 15 HDG	500	200	2.76
ROSM 1550.15 15 HDG	500	150	2.72
ROSM 1550.10 15 HDG	500	100	2.68
ROSM 1560.50 15 HDG	600	500	3.09
ROSM 1560.45 15 HDG	600	450	3.05
ROSM 1560.40 15 HDG	600	400	3.01
ROSM 1560.30 15 HDG	600	300	2.93
ROSM 1560.25 15 HDG	600	250	2.88
ROSM 1560.20 15 HDG	600	200	2.84
ROSM 1560.15 15 HDG	600	150	2.80
ROSM 1560.10 15 HDG	600	100	2.76
ROSM 1575.60 15 HDG	750	600	3.30
ROSM 1575.50 15 HDG	750	500	3.21
ROSM 1575.45 15 HDG	750	450	3.17
ROSM 1575.40 15 HDG	750	400	3.13
ROSM 1575.30 15 HDG	750	300	3.05
ROSM 1575.20 15 HDG	750	200	2.97
ROSM 1575.15 15 HDG	750	150	2.93
ROSM 1590.75 15 HDG	900	750	3.54
ROSM 1590.60 15 HDG	900	600	3.42
ROSM 1590.45 15 HDG	900	450	3.30
ROSM 1590.30 15 HDG	900	300	3.17
ROSM 1590.15 15 HDG	900	150	4.57
ROSM 1502.90 15 HDG	1200	900	3.91
ROSM 1502.75 15 HDG	1200	750	3.79
ROSM 1502.60 15 HDG	1200	600	3.67
ROSM 1502.30 15 HDG	1200	300	6.40
ROSM 1502.15 15 HDG	1200	150	6.81

ROSM... H150		2.0mm	
CODE	Width W1 mm	Width W2 mm	kg 1pc
ROSM 1515.10 20 HDG	150	100	3.18
ROSM 1520.15 20 HDG	200	150	3.29
ROSM 1520.10 20 HDG	200	100	3.24
ROSM 1525.20 20 HDG	250	200	3.40
ROSM 1525.15 20 HDG	250	150	3.35
ROSM 1525.10 20 HDG	250	100	3.29
ROSM 1530.25 20 HDG	300	250	3.51
ROSM 1530.20 20 HDG	300	200	3.46
ROSM 1530.15 20 HDG	300	150	3.40
ROSM 1530.10 20 HDG	300	100	3.35
ROSM 1540.30 20 HDG	400	300	3.68
ROSM 1540.25 20 HDG	400	250	3.62
ROSM 1540.20 20 HDG	400	200	3.57
ROSM 1540.15 20 HDG	400	150	3.51
ROSM 1540.10 20 HDG	400	100	3.46
ROSM 1545.40 20 HDG	450	400	3.84
ROSM 1545.30 20 HDG	450	300	3.73
ROSM 1545.25 20 HDG	450	250	3.68
ROSM 1545.20 20 HDG	450	200	3.62
ROSM 1545.15 20 HDG	450	150	3.57
ROSM 1545.10 20 HDG	450	100	3.51
ROSM 1550.45 20 HDG	500	450	3.95
ROSM 1550.40 20 HDG	500	400	3.90
ROSM 1550.30 20 HDG	500	300	3.79
ROSM 1550.25 20 HDG	500	250	3.73
ROSM 1550.20 20 HDG	500	200	3.68
ROSM 1550.15 20 HDG	500	150	3.62
ROSM 1550.10 20 HDG	500	100	3.57
ROSM 1560.50 20 HDG	600	500	4.12
ROSM 1560.45 20 HDG	600	450	4.06
ROSM 1560.40 20 HDG	600	400	4.01
ROSM 1560.30 20 HDG	600	300	3.90
ROSM 1560.25 20 HDG	600	250	3.84
ROSM 1560.20 20 HDG	600	200	3.79
ROSM 1560.15 20 HDG	600	150	3.73
ROSM 1560.10 20 HDG	600	100	3.68
ROSM 1575.60 20 HDG	750	600	4.39
ROSM 1575.50 20 HDG	750	500	4.28
ROSM 1575.45 20 HDG	750	450	4.23
ROSM 1575.40 20 HDG	750	400	4.17
ROSM 1575.30 20 HDG	750	300	4.06
ROSM 1575.20 20 HDG	750	200	3.95
ROSM 1575.15 20 HDG	750	150	3.90
ROSM 1590.75 20 HDG	900	750	4.72
ROSM 1590.60 20 HDG	900	600	4.56
ROSM 1590.45 20 HDG	900	450	4.39
ROSM 1590.30 20 HDG	900	300	4.23
ROSM 1590.15 20 HDG	900	150	6.09
ROSM 1502.90 20 HDG	1200	900	5.22
ROSM 1502.75 20 HDG	1200	750	5.05
ROSM 1502.60 20 HDG	1200	600	4.89
ROSM 1502.30 20 HDG	1200	300	8.53
ROSM 1502.15 20 HDG	1200	150	9.07



ROSM H150 HDG

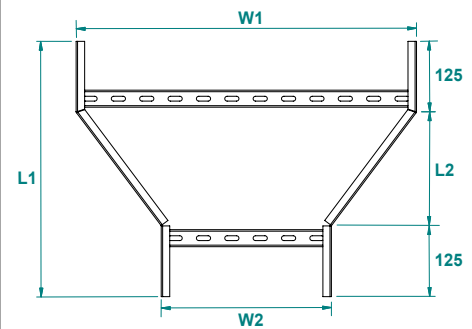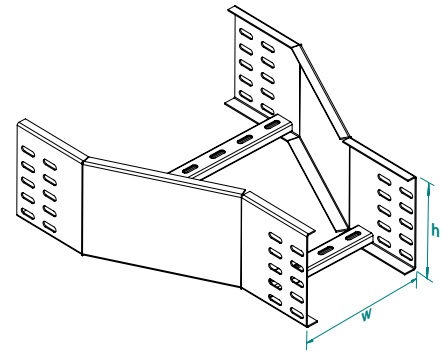

	L1	L2
100-600	450 mm	200 mm
700-1200	650 mm	400 mm

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method
to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0

Cable Ladder Systems of Side Height 150



MTK
MADE IN TURKEY

Left Reducer Bend of Cable Ladder

Merdiven Soldan Redüksiyon - Редукционный переходник кабельроста, левосторонний




Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8



Hot-Dip Galvanized

RLSM... H150				1.5mm	
CODE	Width W1 mm	Width W2 mm	kg 1pc	pcs	
RLSM 1515.10 15 HDG	150	100	2.39	1	
RLSM 1520.15 15 HDG	200	150	2.47	1	
RLSM 1520.10 15 HDG	200	100	2.43	1	
RLSM 1525.20 15 HDG	250	200	2.55	1	
RLSM 1525.15 15 HDG	250	150	2.51	1	
RLSM 1525.10 15 HDG	250	100	2.47	1	
RLSM 1530.25 15 HDG	300	250	2.64	1	
RLSM 1530.20 15 HDG	300	200	2.60	1	
RLSM 1530.15 15 HDG	300	150	2.55	1	
RLSM 1530.10 15 HDG	300	100	2.51	1	
RLSM 1540.30 15 HDG	400	300	2.76	1	
RLSM 1540.25 15 HDG	400	250	2.72	1	
RLSM 1540.20 15 HDG	400	200	2.68	1	
RLSM 1540.15 15 HDG	400	150	2.64	1	
RLSM 1540.10 15 HDG	400	100	2.60	1	
RLSM 1545.40 15 HDG	450	400	2.88	1	
RLSM 1545.30 15 HDG	450	300	2.80	1	
RLSM 1545.25 15 HDG	450	250	2.76	1	
RLSM 1545.20 15 HDG	450	200	2.72	1	
RLSM 1545.15 15 HDG	450	150	2.68	1	
RLSM 1545.10 15 HDG	450	100	2.64	1	
RLSM 1550.45 15 HDG	500	450	2.97	1	
RLSM 1550.40 15 HDG	500	400	2.93	1	
RLSM 1550.30 15 HDG	500	300	2.84	1	
RLSM 1550.25 15 HDG	500	250	2.80	1	
RLSM 1550.20 15 HDG	500	200	2.76	1	
RLSM 1550.15 15 HDG	500	150	2.72	1	
RLSM 1550.10 15 HDG	500	100	2.68	1	
RLSM 1560.50 15 HDG	600	500	3.09	1	
RLSM 1560.45 15 HDG	600	450	3.05	1	
RLSM 1560.40 15 HDG	600	400	3.01	1	
RLSM 1560.30 15 HDG	600	300	2.93	1	
RLSM 1560.25 15 HDG	600	250	2.88	1	
RLSM 1560.20 15 HDG	600	200	2.84	1	
RLSM 1560.15 15 HDG	600	150	2.80	1	
RLSM 1560.10 15 HDG	600	100	2.76	1	
RLSM 1575.60 15 HDG	750	600	3.30	1	
RLSM 1575.50 15 HDG	750	500	3.21	1	
RLSM 1575.45 15 HDG	750	450	3.17	1	
RLSM 1575.40 15 HDG	750	400	3.13	1	
RLSM 1575.30 15 HDG	750	300	3.05	1	
RLSM 1575.20 15 HDG	750	200	2.97	1	
RLSM 1575.15 15 HDG	750	150	2.93	1	
RLSM 1590.75 15 HDG	900	750	3.54	1	
RLSM 1590.60 15 HDG	900	600	3.42	1	
RLSM 1590.45 15 HDG	900	450	3.30	1	
RLSM 1590.30 15 HDG	900	300	3.17	1	
RLSM 1590.15 15 HDG	900	150	4.57	1	
RLSM 1502.90 15 HDG	1200	900	3.91	1	
RLSM 1502.75 15 HDG	1200	750	3.79	1	
RLSM 1502.60 15 HDG	1200	600	3.67	1	
RLSM 1502.30 15 HDG	1200	300	6.40	1	
RLSM 1502.15 15 HDG	1200	150	6.81	1	

RLSM... H150				2.0mm	
CODE	Width W1 mm	Width W2 mm	kg 1pc	pcs	
RLSM 1515.10 20 HDG	150	100	3.18	1	
RLSM 1520.15 20 HDG	200	150	3.29	1	
RLSM 1520.10 20 HDG	200	100	3.24	1	
RLSM 1525.20 20 HDG	250	200	3.40	1	
RLSM 1525.15 20 HDG	250	150	3.35	1	
RLSM 1525.10 20 HDG	250	100	3.29	1	
RLSM 1530.25 20 HDG	300	250	3.51	1	
RLSM 1530.20 20 HDG	300	200	3.46	1	
RLSM 1530.15 20 HDG	300	150	3.40	1	
RLSM 1530.10 20 HDG	300	100	3.35	1	
RLSM 1540.30 20 HDG	400	300	3.68	1	
RLSM 1540.25 20 HDG	400	250	3.62	1	
RLSM 1540.20 20 HDG	400	200	3.57	1	
RLSM 1540.15 20 HDG	400	150	3.51	1	
RLSM 1540.10 20 HDG	400	100	3.46	1	
RLSM 1545.40 20 HDG	450	400	3.84	1	
RLSM 1545.30 20 HDG	450	300	3.73	1	
RLSM 1545.25 20 HDG	450	250	3.68	1	
RLSM 1545.20 20 HDG	450	200	3.62	1	
RLSM 1545.15 20 HDG	450	150	3.57	1	
RLSM 1545.10 20 HDG	450	100	3.51	1	
RLSM 1550.45 20 HDG	500	450	3.95	1	
RLSM 1550.40 20 HDG	500	400	3.90	1	
RLSM 1550.30 20 HDG	500	300	3.79	1	
RLSM 1550.25 20 HDG	500	250	3.73	1	
RLSM 1550.20 20 HDG	500	200	3.68	1	
RLSM 1550.15 20 HDG	500	150	3.62	1	
RLSM 1550.10 20 HDG	500	100	3.57	1	
RLSM 1560.50 20 HDG	600	500	4.12	1	
RLSM 1560.45 20 HDG	600	450	4.06	1	
RLSM 1560.40 20 HDG	600	400	4.01	1	
RLSM 1560.30 20 HDG	600	300	3.90	1	
RLSM 1560.25 20 HDG	600	250	3.84	1	
RLSM 1560.20 20 HDG	600	200	3.79	1	
RLSM 1560.15 20 HDG	600	150	3.73	1	
RLSM 1560.10 20 HDG	600	100	3.68	1	
RLSM 1575.60 20 HDG	750	600	4.39	1	
RLSM 1575.50 20 HDG	750	500	4.28	1	
RLSM 1575.45 20 HDG	750	450	4.23	1	
RLSM 1575.40 20 HDG	750	400	4.17	1	
RLSM 1575.30 20 HDG	750	300	4.06	1	
RLSM 1575.20 20 HDG	750	200	3.95	1	
RLSM 1575.15 20 HDG	750	150	3.90	1	
RLSM 1590.75 20 HDG	900	750	4.72	1	
RLSM 1590.60 20 HDG	900	600	4.56	1	
RLSM 1590.45 20 HDG	900	450	4.39	1	
RLSM 1590.30 20 HDG	900	300	4.23	1	
RLSM 1590.15 20 HDG	900	150	6.09	1	
RLSM 1502.90 20 HDG	1200	900	5.22	1	
RLSM 1502.75 20 HDG	1200	750	5.05	1	
RLSM 1502.60 20 HDG	1200	600	4.89	1	
RLSM 1502.30 20 HDG	1200	300	8.53	1	
RLSM 1502.15 20 HDG	1200	150	9.07	1	

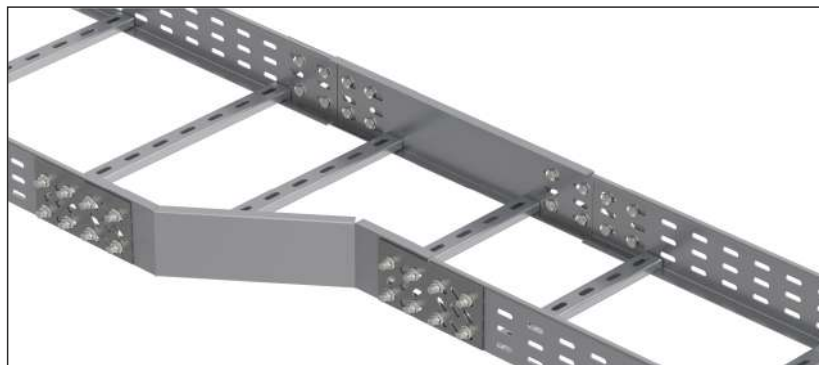

RLSM H150 HDG

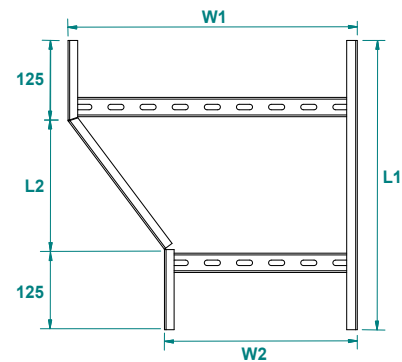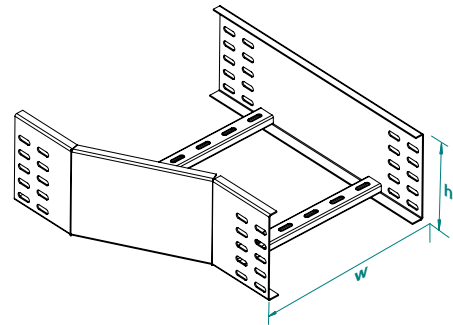

	L1	L2
100-600	450 mm	200 mm
700-1200	650 mm	400 mm

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: **1.5 2.0**

Cable Ladder Systems of Side Height 150



MTK
MADE IN TURKEY

Right Reducer Bend of Cable Ladder

Merdiven Sağdan Redüksiyon - Редукционный переходник кабельроста, правосторонний



Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized

RGSM... H150		1.5mm	
CODE	Width W1 mm	Width W1 mm	kg 1pc
RGSM 1515.10 15 HDG	150	100	2.39
RGSM 1520.15 15 HDG	200	150	2.47
RGSM 1520.10 15 HDG	200	100	2.43
RGSM 1525.20 15 HDG	250	200	2.55
RGSM 1525.15 15 HDG	250	150	2.51
RGSM 1525.10 15 HDG	250	100	2.47
RGSM 1530.25 15 HDG	300	250	2.64
RGSM 1530.20 15 HDG	300	200	2.60
RGSM 1530.15 15 HDG	300	150	2.55
RGSM 1530.10 15 HDG	300	100	2.51
RGSM 1540.30 15 HDG	400	300	2.76
RGSM 1540.25 15 HDG	400	250	2.72
RGSM 1540.20 15 HDG	400	200	2.68
RGSM 1540.15 15 HDG	400	150	2.64
RGSM 1540.10 15 HDG	400	100	2.60
RGSM 1545.40 15 HDG	450	400	2.88
RGSM 1545.30 15 HDG	450	300	2.80
RGSM 1545.25 15 HDG	450	250	2.76
RGSM 1545.20 15 HDG	450	200	2.72
RGSM 1545.15 15 HDG	450	150	2.68
RGSM 1545.10 15 HDG	450	100	2.64
RGSM 1550.45 15 HDG	500	450	2.97
RGSM 1550.40 15 HDG	500	400	2.93
RGSM 1550.30 15 HDG	500	300	2.84
RGSM 1550.25 15 HDG	500	250	2.80
RGSM 1550.20 15 HDG	500	200	2.76
RGSM 1550.15 15 HDG	500	150	2.72
RGSM 1550.10 15 HDG	500	100	2.68
RGSM 1560.50 15 HDG	600	500	3.09
RGSM 1560.45 15 HDG	600	450	3.05
RGSM 1560.40 15 HDG	600	400	3.01
RGSM 1560.30 15 HDG	600	300	2.93
RGSM 1560.25 15 HDG	600	250	2.88
RGSM 1560.20 15 HDG	600	200	2.84
RGSM 1560.15 15 HDG	600	150	2.80
RGSM 1560.10 15 HDG	600	100	2.76
RGSM 1575.60 15 HDG	750	600	3.30
RGSM 1575.50 15 HDG	750	500	3.21
RGSM 1575.45 15 HDG	750	450	3.17
RGSM 1575.40 15 HDG	750	400	3.13
RGSM 1575.30 15 HDG	750	300	3.05
RGSM 1575.20 15 HDG	750	200	2.97
RGSM 1575.15 15 HDG	750	150	2.93
RGSM 1590.75 15 HDG	900	750	3.54
RGSM 1590.60 15 HDG	900	600	3.42
RGSM 1590.45 15 HDG	900	450	3.30
RGSM 1590.30 15 HDG	900	300	3.17
RGSM 1590.15 15 HDG	900	150	4.57
RGSM 1502.90 15 HDG	1200	900	3.91
RGSM 1502.75 15 HDG	1200	750	3.79
RGSM 1502.60 15 HDG	1200	600	3.67
RGSM 1502.30 15 HDG	1200	300	6.40
RGSM 1502.15 15 HDG	1200	150	6.81

RGSM... H150		2.0mm	
CODE	Width W1 mm	Width W1 mm	kg 1pc
RGSM 1515.10 20 HDG	150	100	3.18
RGSM 1520.15 20 HDG	200	150	3.29
RGSM 1520.10 20 HDG	200	100	3.24
RGSM 1525.20 20 HDG	250	200	3.40
RGSM 1525.15 20 HDG	250	150	3.35
RGSM 1525.10 20 HDG	250	100	3.29
RGSM 1530.25 20 HDG	300	250	3.51
RGSM 1530.20 20 HDG	300	200	3.46
RGSM 1530.15 20 HDG	300	150	3.40
RGSM 1530.10 20 HDG	300	100	3.35
RGSM 1540.30 20 HDG	400	300	3.68
RGSM 1540.25 20 HDG	400	250	3.62
RGSM 1540.20 20 HDG	400	200	3.57
RGSM 1540.15 20 HDG	400	150	3.51
RGSM 1540.10 20 HDG	400	100	3.46
RGSM 1545.40 20 HDG	450	400	3.84
RGSM 1545.30 20 HDG	450	300	3.73
RGSM 1545.25 20 HDG	450	250	3.68
RGSM 1545.20 20 HDG	450	200	3.62
RGSM 1545.15 20 HDG	450	150	3.57
RGSM 1545.10 20 HDG	450	100	3.51
RGSM 1550.45 20 HDG	500	450	3.95
RGSM 1550.40 20 HDG	500	400	3.90
RGSM 1550.30 20 HDG	500	300	3.79
RGSM 1550.25 20 HDG	500	250	3.73
RGSM 1550.20 20 HDG	500	200	3.68
RGSM 1550.15 20 HDG	500	150	3.62
RGSM 1550.10 20 HDG	500	100	3.57
RGSM 1560.50 20 HDG	600	500	4.12
RGSM 1560.45 20 HDG	600	450	4.06
RGSM 1560.40 20 HDG	600	400	4.01
RGSM 1560.30 20 HDG	600	300	3.90
RGSM 1560.25 20 HDG	600	250	3.84
RGSM 1560.20 20 HDG	600	200	3.79
RGSM 1560.15 20 HDG	600	150	3.73
RGSM 1560.10 20 HDG	600	100	3.68
RGSM 1575.60 20 HDG	750	600	4.39
RGSM 1575.50 20 HDG	750	500	4.28
RGSM 1575.45 20 HDG	750	450	4.23
RGSM 1575.40 20 HDG	750	400	4.17
RGSM 1575.30 20 HDG	750	300	4.06
RGSM 1575.20 20 HDG	750	200	3.95
RGSM 1575.15 20 HDG	750	150	3.90
RGSM 1590.75 20 HDG	900	750	4.72
RGSM 1590.60 20 HDG	900	600	4.56
RGSM 1590.45 20 HDG	900	450	4.39
RGSM 1590.30 20 HDG	900	300	4.23
RGSM 1590.15 20 HDG	900	150	6.09
RGSM 1502.90 20 HDG	1200	900	5.22
RGSM 1502.75 20 HDG	1200	750	5.05
RGSM 1502.60 20 HDG	1200	600	4.89
RGSM 1502.30 20 HDG	1200	300	8.53
RGSM 1502.15 20 HDG	1200	150	9.07

RGSM H150 HDG

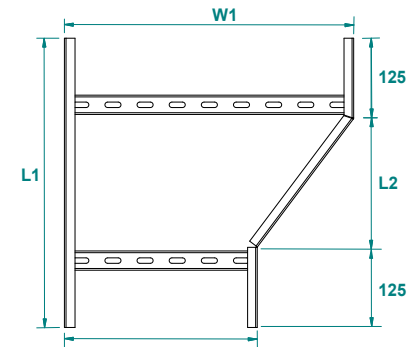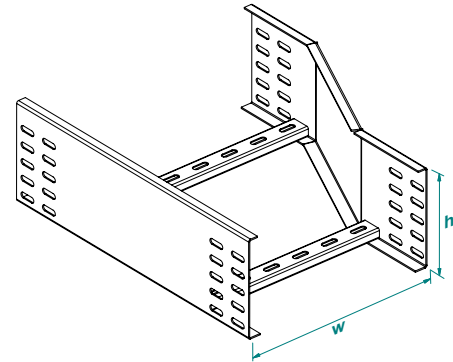

	L1	L2
100-600	450 mm	200 mm
700-1200	650 mm	400 mm



APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0

Cable Ladder Systems of Side Height 150



MTK
MADE IN TURKEY

Vertical 90° Inside Bend of Cable Ladder (stable)

90° Dikey Merdiven İç Bükey Elemanı-(Sabit) - Арка фиксированная кабельроста, внутренняя 90°



Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized


MIS... H150		1.5mm		
CODE	Width a=b mm	Radius R mm	Kg 1pc	pcs
MIS 1510 15 HDG	100	150	2.65	1
MIS 1515 15 HDG	150	150	2.77	1
MIS 1520 15 HDG	200	150	2.90	1
MIS 1525 15 HDG	250	150	3.02	1
MIS 1530 15 HDG	300	150	3.14	1
MIS 1540 15 HDG	400	150	3.39	1
MIS 1545 15 HDG	450	150	3.51	1
MIS 1550 15 HDG	500	150	3.64	1
MIS 1560 15 HDG	600	150	3.88	1
MIS 1570 15 HDG	700	150	4.13	1
MIS 1575 15 HDG	750	150	4.26	1
MIS 1580 15 HDG	800	150	4.38	1
MIS 1590 15 HDG	900	150	4.63	1
MIS 1500 15 HDG	1000	150	4.87	1
MIS 1502 15 HDG	1200	150	5.37	1

MIS... H150		2.0mm		
CODE	Width a=b mm	Radius R mm	Kg 1pc	pcs
MIS 1510 20 HDG	100	150	3.53	1
MIS 1515 20 HDG	150	150	3.69	1
MIS 1520 20 HDG	200	150	3.86	1
MIS 1525 20 HDG	250	150	4.02	1
MIS 1530 20 HDG	300	150	4.19	1
MIS 1540 20 HDG	400	150	4.52	1
MIS 1545 20 HDG	450	150	4.68	1
MIS 1550 20 HDG	500	150	4.85	1
MIS 1560 20 HDG	600	150	5.18	1
MIS 1570 20 HDG	700	150	5.51	1
MIS 1575 20 HDG	750	150	5.67	1
MIS 1580 20 HDG	800	150	5.84	1
MIS 1590 20 HDG	900	150	6.17	1
MIS 1500 20 HDG	1000	150	6.50	1
MIS 1502 20 HDG	1200	150	7.16	1

MIS H150 HDG

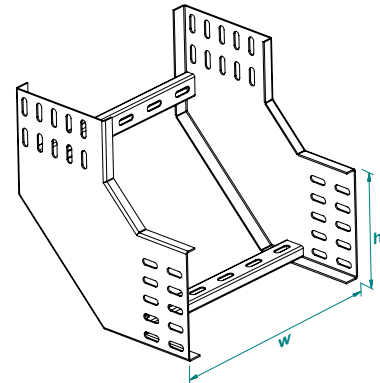

MISR2 H150 HDG

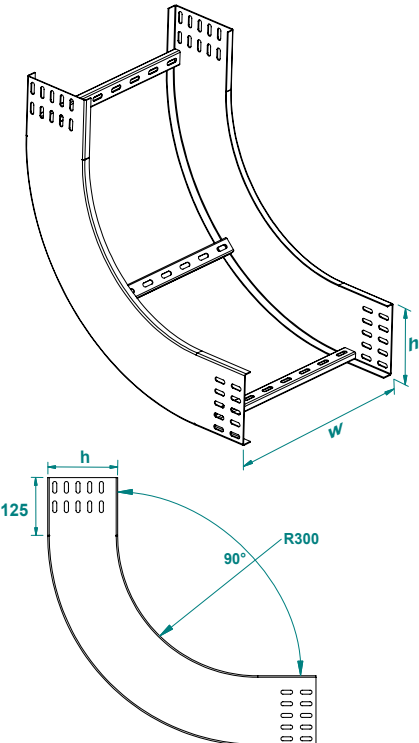

Vertical 90° Inside Bend of Cable Ladder (stable) Radius:300

90° Dikey Merdiven İç Bükey Elemanı-(Sabit) Radyus:300 - Арка фиксированная кабельроста, внутренняя 90° радиус:300



Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized

MISR2... H150		1.5mm		
CODE	Width a=b mm	Radius R mm	Kg 1pc	pcs
MISR2 1510 15 HDG	100	300	5.48	1
MISR2 1515 15 HDG	150	300	5.69	1
MISR2 1520 15 HDG	200	300	5.90	1
MISR2 1525 15 HDG	250	300	6.11	1
MISR2 1530 15 HDG	300	300	6.32	1
MISR2 1540 15 HDG	400	300	6.75	1
MISR2 1545 15 HDG	450	300	6.96	1
MISR2 1550 15 HDG	500	300	7.17	1
MISR2 1560 15 HDG	600	300	7.59	1
MISR2 1570 15 HDG	700	300	8.01	1
MISR2 1575 15 HDG	750	300	8.23	1
MISR2 1580 15 HDG	800	300	8.44	1
MISR2 1590 15 HDG	900	300	8.86	1
MISR2 1500 15 HDG	1000	300	9.28	1
MISR2 1502 15 HDG	1200	300	10.13	1

MISR2... H150		2.0mm		
CODE	Width a=b mm	Radius R mm	Kg 1pc	pcs
MISR2 1510 20 HDG	100	300	7.30	1
MISR2 1515 20 HDG	150	300	7.59	1
MISR2 1520 20 HDG	200	300	7.87	1
MISR2 1525 20 HDG	250	300	8.15	1
MISR2 1530 20 HDG	300	300	8.43	1
MISR2 1540 20 HDG	400	300	8.99	1
MISR2 1545 20 HDG	450	300	9.28	1
MISR2 1550 20 HDG	500	300	9.56	1
MISR2 1560 20 HDG	600	300	10.12	1
MISR2 1570 20 HDG	700	300	10.68	1
MISR2 1575 20 HDG	750	300	10.97	1
MISR2 1580 20 HDG	800	300	11.25	1
MISR2 1590 20 HDG	900	300	11.81	1
MISR2 1500 20 HDG	1000	300	12.37	1
MISR2 1502 20 HDG	1200	300	13.50	1

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method
to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: **1.5 2.0**

Cable Ladder Systems of Side Height 150



Vertical 90° Inside Bend of Cable Ladder (stable) Radius:450

90° Dikey Merdiven İç Bükey Elemanı-(Sabit) Radyus:450 - 90° Dikey Merdiven İç Bükey Elemanı-(Sabit) Radyus:450



Hot-Dip Galvanized

Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

MISR3... H150		1.5mm			
CODE	Width a=b mm	Radius R mm	Kg 1pc	pcs	
MISR3 1510 15 HDG	100	450	6.83	1	
MISR3 1515 15 HDG	150	450	7.09	1	
MISR3 1520 15 HDG	200	450	7.36	1	
MISR3 1525 15 HDG	250	450	7.62	1	
MISR3 1530 15 HDG	300	450	7.88	1	
MISR3 1540 15 HDG	400	450	8.41	1	
MISR3 1545 15 HDG	450	450	8.68	1	
MISR3 1550 15 HDG	500	450	8.94	1	
MISR3 1560 15 HDG	600	450	9.47	1	
MISR3 1570 15 HDG	700	450	10.00	1	
MISR3 1575 15 HDG	750	450	10.26	1	
MISR3 1580 15 HDG	800	450	10.52	1	
MISR3 1590 15 HDG	900	450	11.05	1	
MISR3 1500 15 HDG	1000	450	11.58	1	
MISR3 1502 15 HDG	1200	450	12.64	1	

MISR3... H150		2.0mm			
CODE	Width a=b mm	Radius R mm	Kg 1pc	pcs	
MISR3 1510 20 HDG	100	450	9.10	1	
MISR3 1515 20 HDG	150	450	9.45	1	
MISR3 1520 20 HDG	200	450	9.81	1	
MISR3 1525 20 HDG	250	450	10.16	1	
MISR3 1530 20 HDG	300	450	10.51	1	
MISR3 1540 20 HDG	400	450	11.21	1	
MISR3 1545 20 HDG	450	450	11.57	1	
MISR3 1550 20 HDG	500	450	11.92	1	
MISR3 1560 20 HDG	600	450	12.62	1	
MISR3 1570 20 HDG	700	450	13.33	1	
MISR3 1575 20 HDG	750	450	13.68	1	
MISR3 1580 20 HDG	800	450	14.03	1	
MISR3 1590 20 HDG	900	450	14.74	1	
MISR3 1500 20 HDG	1000	450	15.44	1	
MISR3 1502 20 HDG	1200	450	16.85	1	

Vertical 90° Inside Bend of Cable Ladder (stable) Radius:600

90° Dikey Merdiven İç Bükey Elemanı-(Sabit) Radyus:600 - Арка фиксированная кабельроста, внутренняя 90° радиус:600



Hot-Dip Galvanized


Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8


MISR4... H150		1.5mm			
CODE	Width a=b mm	Radius R mm	Kg 1pc	pcs	
MISR4 1510 15 HDG	100	600	8.07	1	
MISR4 1515 15 HDG	150	600	8.34	1	
MISR4 1520 15 HDG	200	600	8.60	1	
MISR4 1525 15 HDG	250	600	8.86	1	
MISR4 1530 15 HDG	300	600	9.13	1	
MISR4 1540 15 HDG	400	600	9.66	1	
MISR4 1545 15 HDG	450	600	9.92	1	
MISR4 1550 15 HDG	500	600	10.18	1	
MISR4 1560 15 HDG	600	600	10.71	1	
MISR4 1570 15 HDG	700	600	11.24	1	
MISR4 1575 15 HDG	750	600	11.50	1	
MISR4 1580 15 HDG	800	600	11.77	1	
MISR4 1590 15 HDG	900	600	12.30	1	
MISR4 1500 15 HDG	1000	600	12.82	1	
MISR4 1502 15 HDG	1200	600	13.88	1	

MISR4... H150		2.0mm			
CODE	Width a=b mm	Radius R mm	Kg 1pc	pcs	
MISR4 1510 20 HDG	100	600	10.76	1	
MISR4 1515 20 HDG	150	600	11.11	1	
MISR4 1520 20 HDG	200	600	11.46	1	
MISR4 1525 20 HDG	250	600	11.82	1	
MISR4 1530 20 HDG	300	600	12.17	1	
MISR4 1540 20 HDG	400	600	12.87	1	
MISR4 1545 20 HDG	450	600	13.23	1	
MISR4 1550 20 HDG	500	600	13.58	1	
MISR4 1560 20 HDG	600	600	14.28	1	
MISR4 1570 20 HDG	700	600	14.99	1	
MISR4 1575 20 HDG	750	600	15.34	1	
MISR4 1580 20 HDG	800	600	15.69	1	
MISR4 1590 20 HDG	900	600	16.39	1	
MISR4 1500 20 HDG	1000	600	17.10	1	
MISR4 1502 20 HDG	1200	600	18.51	1	

MISR3 H150 HDG

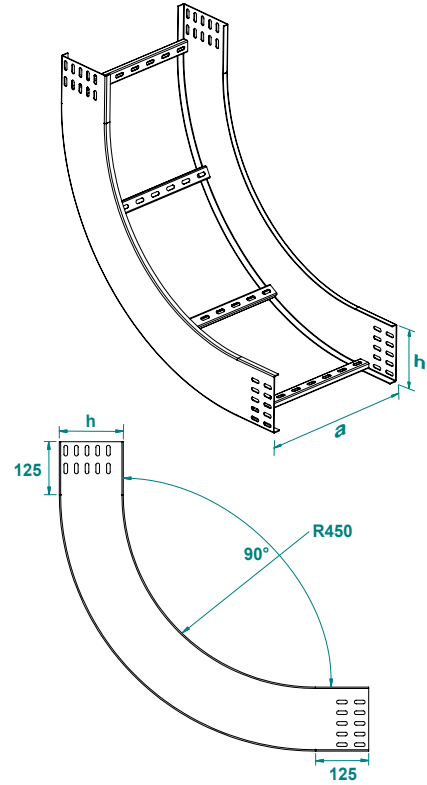

MISR4 H150 HDG

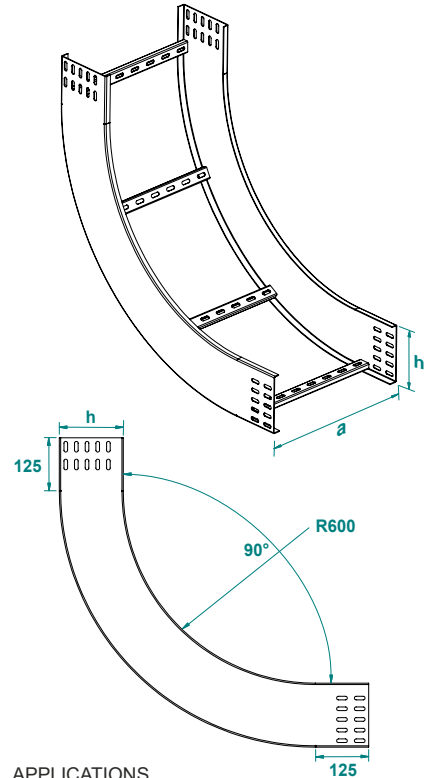

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0

Cable Ladder Systems of Side Height 150



MTK
MADE IN TURKEY

Vertical 60° Inside Bend of Cable Ladder (stable)

60° Dikey Merdiven İç Bükey Elemanı-(Sabit) - Арка фиксированная кабельроста, внутренняя 60°



Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized

MIS60... H150		1.5mm			
CODE	Width a=b mm	Radius R mm	Kg 1pc	pcs	
MIS60 1510 15 HDG	100	150	2.43	1	
MIS60 1515 15 HDG	150	150	2.55	1	
MIS60 1520 15 HDG	200	150	2.68	1	
MIS60 1525 15 HDG	250	150	2.80	1	
MIS60 1530 15 HDG	300	150	2.93	1	
MIS60 1540 15 HDG	400	150	3.17	1	
MIS60 1545 15 HDG	450	150	3.30	1	
MIS60 1550 15 HDG	500	150	3.42	1	
MIS60 1560 15 HDG	600	150	3.67	1	
MIS60 1570 15 HDG	700	150	3.91	1	
MIS60 1575 15 HDG	750	150	4.04	1	
MIS60 1580 15 HDG	800	150	4.16	1	
MIS60 1590 15 HDG	900	150	4.41	1	
MIS60 1500 15 HDG	1000	150	4.66	1	
MIS60 1502 15 HDG	1200	150	5.15	1	

MIS60... H150		2.0mm			
CODE	Width a=b mm	Radius R mm	Kg 1pc	pcs	
MIS60 1510 20 HDG	100	150	3.24	1	
MIS60 1515 20 HDG	150	150	3.40	1	
MIS60 1520 20 HDG	200	150	3.57	1	
MIS60 1525 20 HDG	250	150	3.73	1	
MIS60 1530 20 HDG	300	150	3.90	1	
MIS60 1540 20 HDG	400	150	4.23	1	
MIS60 1545 20 HDG	450	150	4.39	1	
MIS60 1550 20 HDG	500	150	4.56	1	
MIS60 1560 20 HDG	600	150	4.89	1	
MIS60 1570 20 HDG	700	150	5.22	1	
MIS60 1575 20 HDG	750	150	5.38	1	
MIS60 1580 20 HDG	800	150	5.55	1	
MIS60 1590 20 HDG	900	150	5.88	1	
MIS60 1500 20 HDG	1000	150	6.21	1	
MIS60 1502 20 HDG	1200	150	6.87	1	

Vertical 60° Inside Bend of Cable Ladder (stable) Radius:300

60° Dikey Merdiven İç Bükey Elemanı-(Sabit) Radyus:300 - Арка фиксированная кабельроста, внутренняя 60° радиус:300



Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized



MIS60R2... H150		1.5mm			
CODE	Width a=b mm	Radius R mm	Kg 1pc	pcs	
MIS60R2 1510 15 HDG	100	300	4.13	1	
MIS60R2 1515 15 HDG	150	300	4.29	1	
MIS60R2 1520 15 HDG	200	300	4.45	1	
MIS60R2 1525 15 HDG	250	300	4.60	1	
MIS60R2 1530 15 HDG	300	300	4.76	1	
MIS60R2 1540 15 HDG	400	300	5.08	1	
MIS60R2 1545 15 HDG	450	300	5.24	1	
MIS60R2 1550 15 HDG	500	300	5.40	1	
MIS60R2 1560 15 HDG	600	300	5.71	1	
MIS60R2 1570 15 HDG	700	300	6.03	1	
MIS60R2 1575 15 HDG	750	300	6.19	1	
MIS60R2 1580 15 HDG	800	300	6.35	1	
MIS60R2 1590 15 HDG	900	300	6.66	1	
MIS60R2 1500 15 HDG	1000	300	6.98	1	
MIS60R2 1502 15 HDG	1200	300	7.62	1	

MIS60R2... H150		2.0mm			
CODE	Width a=b mm	Radius R mm	Kg 1pc	pcs	
MIS60R2 1510 20 HDG	100	300	5.50	1	
MIS60R2 1515 20 HDG	150	300	5.72	1	
MIS60R2 1520 20 HDG	200	300	5.93	1	
MIS60R2 1525 20 HDG	250	300	6.14	1	
MIS60R2 1530 20 HDG	300	300	6.35	1	
MIS60R2 1540 20 HDG	400	300	6.77	1	
MIS60R2 1545 20 HDG	450	300	6.98	1	
MIS60R2 1550 20 HDG	500	300	7.19	1	
MIS60R2 1560 20 HDG	600	300	7.62	1	
MIS60R2 1570 20 HDG	700	300	8.04	1	
MIS60R2 1575 20 HDG	750	300	8.25	1	
MIS60R2 1580 20 HDG	800	300	8.46	1	
MIS60R2 1590 20 HDG	900	300	8.88	1	
MIS60R2 1500 20 HDG	1000	300	9.31	1	
MIS60R2 1502 20 HDG	1200	300	10.15	1	

MIS60 H150 HDG

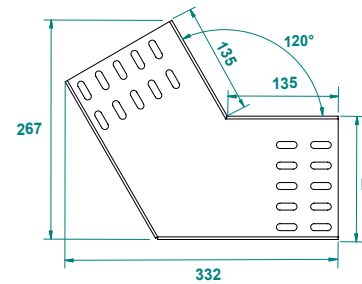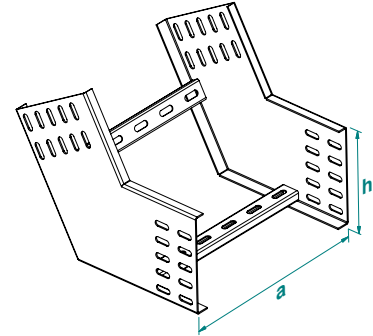

MIS60R2 H150 HDG

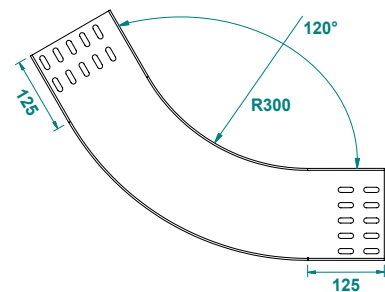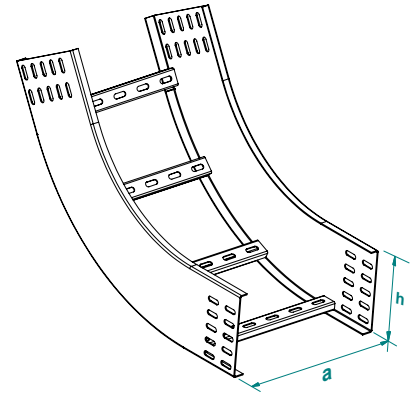

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method

to TS-EN 10346:2011 (PG)

SS- stainless steel AISI 304L and AISI 316L (SS)

EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: **1.5 2.0**

Cable Ladder Systems of Side Height 150



Vertical 60° Inside Bend of Cable Ladder (stable) Radius:450

60° Dikey Merdiven İç Büküye Elemanı-(Sabit) Radyus:450 - Арка фиксированная кабельроста, внутренняя 60° радиус:450



Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized

MIS60R3... H150		1.5mm			
CODE	Width a=b mm	Radius R mm	Kg 1pc	pcs	
MIS60R3 1510 15 HDG	100	450	5.06	1	
MIS60R3 1515 15 HDG	150	450	5.28	1	
MIS60R3 1520 15 HDG	200	450	5.49	1	
MIS60R3 1525 15 HDG	250	450	5.70	1	
MIS60R3 1530 15 HDG	300	450	5.91	1	
MIS60R3 1540 15 HDG	400	450	6.33	1	
MIS60R3 1545 15 HDG	450	450	6.54	1	
MIS60R3 1550 15 HDG	500	450	6.75	1	
MIS60R3 1560 15 HDG	600	450	7.18	1	
MIS60R3 1570 15 HDG	700	450	7.60	1	
MIS60R3 1575 15 HDG	750	450	7.81	1	
MIS60R3 1580 15 HDG	800	450	8.02	1	
MIS60R3 1590 15 HDG	900	450	8.44	1	
MIS60R3 1500 15 HDG	1000	450	8.87	1	
MIS60R3 1502 15 HDG	1200	450	9.71	1	

MIS60R3... H100		2.0mm			
CODE	Width a=b mm	Radius R mm	Kg 1pc	pcs	
MIS60R3 1510 20 HDG	100	450	6.75	1	
MIS60R3 1515 20 HDG	150	450	7.03	1	
MIS60R3 1520 20 HDG	200	450	7.31	1	
MIS60R3 1525 20 HDG	250	450	7.60	1	
MIS60R3 1530 20 HDG	300	450	7.88	1	
MIS60R3 1540 20 HDG	400	450	8.44	1	
MIS60R3 1545 20 HDG	450	450	8.72	1	
MIS60R3 1550 20 HDG	500	450	9.00	1	
MIS60R3 1560 20 HDG	600	450	9.57	1	
MIS60R3 1570 20 HDG	700	450	10.13	1	
MIS60R3 1575 20 HDG	750	450	10.41	1	
MIS60R3 1580 20 HDG	800	450	10.69	1	
MIS60R3 1590 20 HDG	900	450	11.26	1	
MIS60R3 1500 20 HDG	1000	450	11.82	1	
MIS60R3 1502 20 HDG	1200	450	12.95	1	

Vertical 60° Inside Bend of Cable Ladder (stable) Radius:600

60° Dikey Merdiven İç Büküye Elemanı-(Sabit) Radyus:600 - Арка фиксированная кабельроста, внутренняя 60° радиус:600



Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized



MIS60R4... H150		1.5mm			
CODE	Width a=b mm	Radius R mm	Kg 1pc	pcs	
MIS60R4 1510 15 HDG	100	600	5.89	1	
MIS60R4 1515 15 HDG	150	600	6.10	1	
MIS60R4 1520 15 HDG	200	600	6.32	1	
MIS60R4 1525 15 HDG	250	600	6.53	1	
MIS60R4 1530 15 HDG	300	600	6.74	1	
MIS60R4 1540 15 HDG	400	600	7.16	1	
MIS60R4 1545 15 HDG	450	600	7.37	1	
MIS60R4 1550 15 HDG	500	600	7.58	1	
MIS60R4 1560 15 HDG	600	600	8.01	1	
MIS60R4 1570 15 HDG	700	600	8.43	1	
MIS60R4 1575 15 HDG	750	600	8.64	1	
MIS60R4 1580 15 HDG	800	600	8.85	1	
MIS60R4 1590 15 HDG	900	600	9.27	1	
MIS60R4 1500 15 HDG	1000	600	9.70	1	
MIS60R4 1502 15 HDG	1200	600	10.54	1	

MIS60R4... H150		2.0mm			
CODE	Width a=b mm	Radius R mm	Kg 1pc	pcs	
MISR4 1510 20 HDG	100	600	7.86	1	
MISR4 1515 20 HDG	150	600	8.14	1	
MISR4 1520 20 HDG	200	600	8.42	1	
MISR4 1525 20 HDG	250	600	8.70	1	
MISR4 1530 20 HDG	300	600	8.98	1	
MISR4 1540 20 HDG	400	600	9.55	1	
MISR4 1545 20 HDG	450	600	9.83	1	
MISR4 1550 20 HDG	500	600	10.11	1	
MISR4 1560 20 HDG	600	600	10.67	1	
MISR4 1570 20 HDG	700	600	11.24	1	
MISR4 1575 20 HDG	750	600	11.52	1	
MISR4 1580 20 HDG	800	600	11.80	1	
MISR4 1590 20 HDG	900	600	12.36	1	
MISR4 1500 20 HDG	1000	600	12.93	1	
MISR4 1502 20 HDG	1200	600	14.05	1	

MIS60R3 H150 HDG

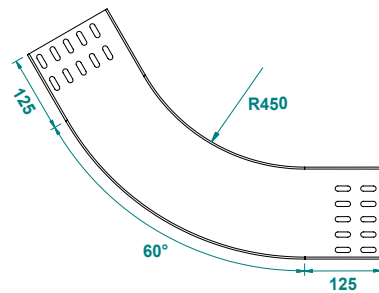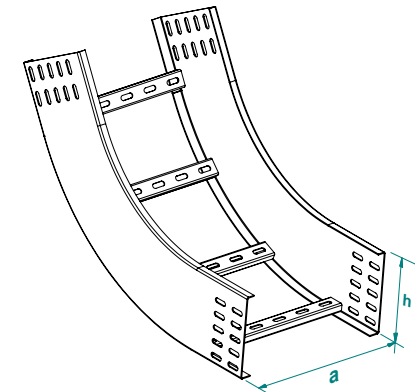

MIS60R4 H100 HDG

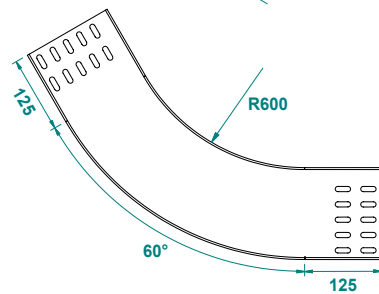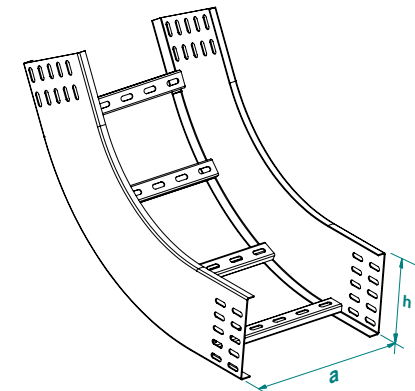

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method

to TS-EN 10346:2011 (PG)

SS- stainless steel AISI 304L and AISI 316L (SS)

EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0

Vertical 45° Inside Bend of Cable Ladder (stable)

45° Dikey Merdiven İç Bükey Elemanı-(Sabit) - Арка фиксированная кабельроста, внутренняя 45°



Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized

MIS45... H150		1.5mm	
CODE	Width a=b mm	Radius R mm	kg 1pc
MIS45 1510 15 HDG	100	150	1.48
MIS45 1515 15 HDG	150	150	1.56
MIS45 1520 15 HDG	200	150	1.64
MIS45 1525 15 HDG	250	150	1.72
MIS45 1530 15 HDG	300	150	1.81
MIS45 1540 15 HDG	400	150	1.97
MIS45 1545 15 HDG	450	150	2.05
MIS45 1550 15 HDG	500	150	2.14
MIS45 1560 15 HDG	600	150	2.30
MIS45 1570 15 HDG	700	150	2.47
MIS45 1575 15 HDG	750	150	2.55
MIS45 1580 15 HDG	800	150	2.63
MIS45 1590 15 HDG	900	150	2.80
MIS45 1500 15 HDG	1000	150	2.96
MIS45 1502 15 HDG	1200	150	3.29

MIS45... H150		2.0mm	
CODE	Width a=b mm	Radius R mm	kg 1pc
MIS45 1510 20 HDG	100	150	1.97
MIS45 1515 20 HDG	150	150	2.08
MIS45 1520 20 HDG	200	150	2.19
MIS45 1525 20 HDG	250	150	2.30
MIS45 1530 20 HDG	300	150	2.41
MIS45 1540 20 HDG	400	150	2.63
MIS45 1545 20 HDG	450	150	2.74
MIS45 1550 20 HDG	500	150	2.85
MIS45 1560 20 HDG	600	150	3.07
MIS45 1570 20 HDG	700	150	3.29
MIS45 1575 20 HDG	750	150	3.40
MIS45 1580 20 HDG	800	150	3.51
MIS45 1590 20 HDG	900	150	3.73
MIS45 1500 20 HDG	1000	150	3.95
MIS45 1502 20 HDG	1200	150	4.39

Vertical 45° Inside Bend of Cable Ladder (stable) Radius:300

45° Dikey Merdiven İç Bükey Elemanı-(Sabit) Radyus:300 - Арка фиксированная кабельроста, внутренняя 45° радиус:300



Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized



MIS45R2... H150		1.5mm	
CODE	Width a=b mm	Radius R mm	kg 1pc
MIS45R2 1510 15 HDG	100	300	3.51
MIS45R2 1515 15 HDG	150	300	3.67
MIS45R2 1520 15 HDG	200	300	3.82
MIS45R2 1525 15 HDG	250	300	3.98
MIS45R2 1530 15 HDG	300	300	4.14
MIS45R2 1540 15 HDG	400	300	4.46
MIS45R2 1545 15 HDG	450	300	4.62
MIS45R2 1550 15 HDG	500	300	4.78
MIS45R2 1560 15 HDG	600	300	5.09
MIS45R2 1570 15 HDG	700	300	5.41
MIS45R2 1575 15 HDG	750	300	5.57
MIS45R2 1580 15 HDG	800	300	5.73
MIS45R2 1590 15 HDG	900	300	6.04
MIS45R2 1500 15 HDG	1000	300	6.36
MIS45R2 1502 15 HDG	1200	300	6.99

MIS45R2... H150		2.0mm	
CODE	Width a=b mm	Radius R mm	kg 1pc
MIS45R2 1510 20 HDG	100	300	4.68
MIS45R2 1515 20 HDG	150	300	4.89
MIS45R2 1520 20 HDG	200	300	5.10
MIS45R2 1525 20 HDG	250	300	5.31
MIS45R2 1530 20 HDG	300	300	5.52
MIS45R2 1540 20 HDG	400	300	5.94
MIS45R2 1545 20 HDG	450	300	6.15
MIS45R2 1550 20 HDG	500	300	6.37
MIS45R2 1560 20 HDG	600	300	6.79
MIS45R2 1570 20 HDG	700	300	7.21
MIS45R2 1575 20 HDG	750	300	7.42
MIS45R2 1580 20 HDG	800	300	7.63
MIS45R2 1590 20 HDG	900	300	8.06
MIS45R2 1500 20 HDG	1000	300	8.48
MIS45R2 1502 20 HDG	1200	300	9.32

MIS45 H150 HDG

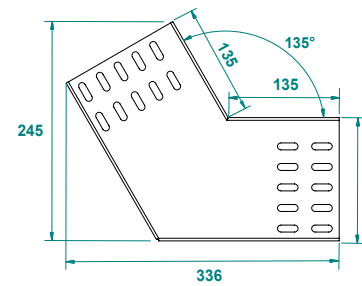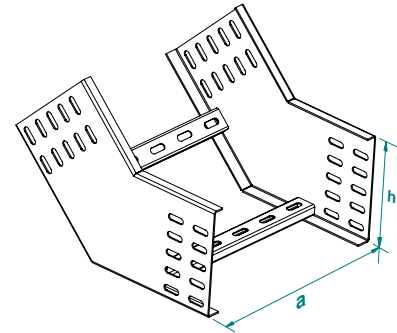

MIS45R2 H150 HDG

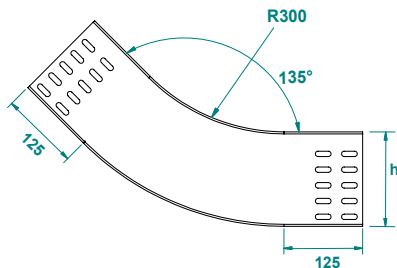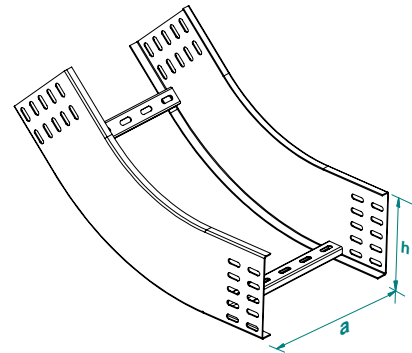

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0

Cable Ladder Systems of Side Height 150



MTK
MADE IN TURKEY

Vertical 45° Inside Bend of Cable Ladder (stable) Radius:450

45° Dikey Merdiven İç Büküye Elemanı-(Sabit) Radyus:450 - Арка фиксированная кабельроста, внутренняя 45° радиус:450



Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized

MIS45R3... H150		1.5mm	
CODE	Width a=b mm	Radius R mm	kg 1pc
MIS45R3 1510 15 HDG	100	450	4.13
MIS45R3 1515 15 HDG	150	450	4.29
MIS45R3 1520 15 HDG	200	450	4.45
MIS45R3 1525 15 HDG	250	450	4.60
MIS45R3 1530 15 HDG	300	450	4.76
MIS45R3 1540 15 HDG	400	450	5.08
MIS45R3 1545 15 HDG	450	450	5.24
MIS45R3 1550 15 HDG	500	450	5.40
MIS45R3 1560 15 HDG	600	450	5.71
MIS45R3 1570 15 HDG	700	450	6.03
MIS45R3 1575 15 HDG	750	450	6.19
MIS45R3 1580 15 HDG	800	450	6.35
MIS45R3 1590 15 HDG	900	450	6.66
MIS45R3 1500 15 HDG	1000	450	6.98
MIS45R3 1502 15 HDG	1200	450	7.62

MIS45R3... H150		2.0mm	
CODE	Width a=b mm	Radius R mm	kg 1pc
MIS45R3 1510 20 HDG	100	450	5.50
MIS45R3 1515 20 HDG	150	450	5.72
MIS45R3 1520 20 HDG	200	450	5.93
MIS45R3 1525 20 HDG	250	450	6.14
MIS45R3 1530 20 HDG	300	450	6.35
MIS45R3 1540 20 HDG	400	450	6.77
MIS45R3 1545 20 HDG	450	450	6.98
MIS45R3 1550 20 HDG	500	450	7.19
MIS45R3 1560 20 HDG	600	450	7.62
MIS45R3 1570 20 HDG	700	450	8.04
MIS45R3 1575 20 HDG	750	450	8.25
MIS45R3 1580 20 HDG	800	450	8.46
MIS45R3 1590 20 HDG	900	450	8.88
MIS45R3 1500 20 HDG	1000	450	9.31
MIS45R3 1502 20 HDG	1200	450	10.15

Vertical 45° Inside Bend of Cable Ladder (stable) Radius:600

45° Dikey Merdiven İç Büküye Elemanı-(Sabit) Radyus:600 - Арка фиксированная кабельроста, внутренняя 45° радиус:600



Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized



MIS45R4... H150		1.5mm	
CODE	Width a=b mm	Radius R mm	kg 1pc
MIS45R4 1510 15 HDG	100	600	4.75
MIS45R4 1515 15 HDG	150	600	4.91
MIS45R4 1520 15 HDG	200	600	5.07
MIS45R4 1525 15 HDG	250	600	5.23
MIS45R4 1530 15 HDG	300	600	5.39
MIS45R4 1540 15 HDG	400	600	5.70
MIS45R4 1545 15 HDG	450	600	5.86
MIS45R4 1550 15 HDG	500	600	6.02
MIS45R4 1560 15 HDG	600	600	6.34
MIS45R4 1570 15 HDG	700	600	6.65
MIS45R4 1575 15 HDG	750	600	6.81
MIS45R4 1580 15 HDG	800	600	6.97
MIS45R4 1590 15 HDG	900	600	7.29
MIS45R4 1500 15 HDG	1000	600	7.60
MIS45R4 1502 15 HDG	1200	600	8.24

MIS45R4... H150		2.0mm	
CODE	Width a=b mm	Radius R mm	kg 1pc
MIS45R4 1510 20 HDG	100	600	6.33
MIS45R4 1515 20 HDG	150	600	6.54
MIS45R4 1520 20 HDG	200	600	6.76
MIS45R4 1525 20 HDG	250	600	6.97
MIS45R4 1530 20 HDG	300	600	7.18
MIS45R4 1540 20 HDG	400	600	7.60
MIS45R4 1545 20 HDG	450	600	7.81
MIS45R4 1550 20 HDG	500	600	8.02
MIS45R4 1560 20 HDG	600	600	8.45
MIS45R4 1570 20 HDG	700	600	8.87
MIS45R4 1575 20 HDG	750	600	9.08
MIS45R4 1580 20 HDG	800	600	9.29
MIS45R4 1590 20 HDG	900	600	9.71
MIS45R4 1500 20 HDG	1000	600	10.14
MIS45R4 1502 20 HDG	1200	600	10.98

MIS45R3 H150 HDG

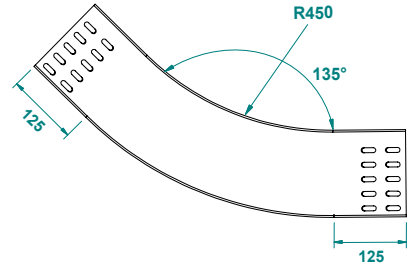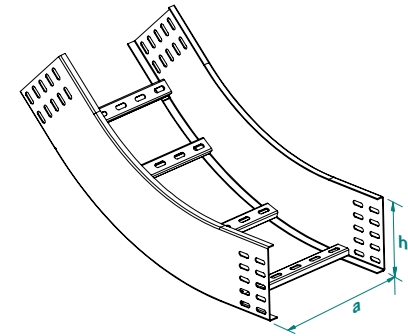

MIS45R4 H150 HDG

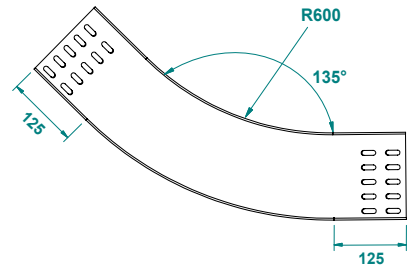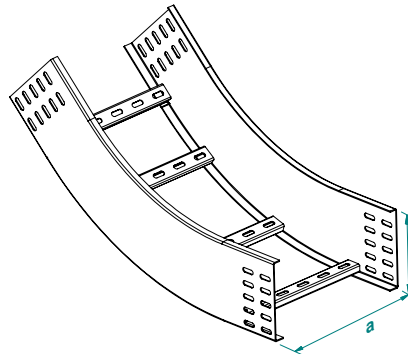

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method

to TS-EN 10346:2011 (PG)

SS- stainless steel AISI 304L and AISI 316L (SS)

EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: **1.5 2.0**

Cable Ladder Systems of Side Height 150



MTK
MADE IN TURKEY

Vertical 30° Inside Bend of Cable Ladder (stable)

30° Dikey Merdiven İç Bükey Elemanı-(Sabit) - Арка фиксированная кабельроста, внутренняя 30°



Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized

MIS30... H150		1.5mm	
CODE	Width a=b mm	Radius R mm	kg 1pc
MIS30 1510 15 HDG	100	150	1.48
MIS30 1515 15 HDG	150	150	1.56
MIS30 1520 15 HDG	200	150	1.64
MIS30 1525 15 HDG	250	150	1.72
MIS30 1530 15 HDG	300	150	1.81
MIS30 1540 15 HDG	400	150	1.97
MIS30 1545 15 HDG	450	150	2.05
MIS30 1550 15 HDG	500	150	2.14
MIS30 1560 15 HDG	600	150	2.30
MIS30 1570 15 HDG	700	150	2.47
MIS30 1575 15 HDG	750	150	2.55
MIS30 1580 15 HDG	800	150	2.63
MIS30 1590 15 HDG	900	150	2.80
MIS30 1500 15 HDG	1000	150	2.96
MIS30 1502 15 HDG	1200	150	3.29

MIS30... H150		2.0mm	
CODE	Width a=b mm	Radius R mm	kg 1pc
MIS30 1510 20 HDG	100	150	1.97
MIS30 1515 20 HDG	150	150	2.08
MIS30 1520 20 HDG	200	150	2.19
MIS30 1525 20 HDG	250	150	2.30
MIS30 1530 20 HDG	300	150	2.41
MIS30 1540 20 HDG	400	150	2.63
MIS30 1545 20 HDG	450	150	2.74
MIS30 1550 20 HDG	500	150	2.85
MIS30 1560 20 HDG	600	150	3.07
MIS30 1570 20 HDG	700	150	3.29
MIS30 1575 20 HDG	750	150	3.40
MIS30 1580 20 HDG	800	150	3.51
MIS30 1590 20 HDG	900	150	3.73
MIS30 1500 20 HDG	1000	150	3.95
MIS30 1502 20 HDG	1200	150	4.39

Vertical 30° Inside Bend of Cable Ladder (stable) Radius:300

30° Dikey Merdiven İç Bükey Elemanı-(Sabit) Radyus:300 - Арка фиксированная кабельроста, внутренняя 30° радиус:300



Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized



MIS30R2... H150		1.5mm	
CODE	Width a=b mm	Radius R mm	kg 1pc
MIS30R2 1510 15 HDG	100	300	2.78
MIS30R2 1515 15 HDG	150	300	2.89
MIS30R2 1520 15 HDG	200	300	2.99
MIS30R2 1525 15 HDG	250	300	3.10
MIS30R2 1530 15 HDG	300	300	3.20
MIS30R2 1540 15 HDG	400	300	3.41
MIS30R2 1545 15 HDG	450	300	3.52
MIS30R2 1550 15 HDG	500	300	3.63
MIS30R2 1560 15 HDG	600	300	3.84
MIS30R2 1570 15 HDG	700	300	4.05
MIS30R2 1575 15 HDG	750	300	4.15
MIS30R2 1580 15 HDG	800	300	4.26
MIS30R2 1590 15 HDG	900	300	4.47
MIS30R2 1500 15 HDG	1000	300	4.68
MIS30R2 1502 15 HDG	1200	300	5.10

MIS30R2... H150		2.0mm	
CODE	Width a=b mm	Radius R mm	kg 1pc
MIS30R2 1510 20 HDG	100	300	3.71
MIS30R2 1515 20 HDG	150	300	3.85
MIS30R2 1520 20 HDG	200	300	3.99
MIS30R2 1525 20 HDG	250	300	4.13
MIS30R2 1530 20 HDG	300	300	4.27
MIS30R2 1540 20 HDG	400	300	4.55
MIS30R2 1545 20 HDG	450	300	4.69
MIS30R2 1550 20 HDG	500	300	4.83
MIS30R2 1560 20 HDG	600	300	5.11
MIS30R2 1570 20 HDG	700	300	5.40
MIS30R2 1575 20 HDG	750	300	5.54
MIS30R2 1580 20 HDG	800	300	5.68
MIS30R2 1590 20 HDG	900	300	5.96
MIS30R2 1500 20 HDG	1000	300	6.24
MIS30R2 1502 20 HDG	1200	300	6.80

MIS30 H150 HDG

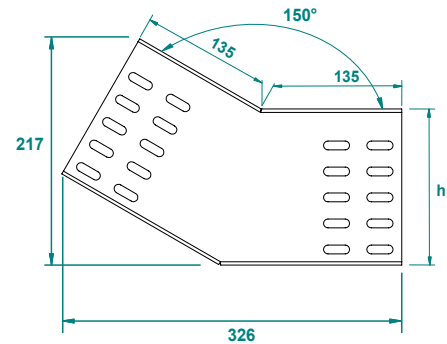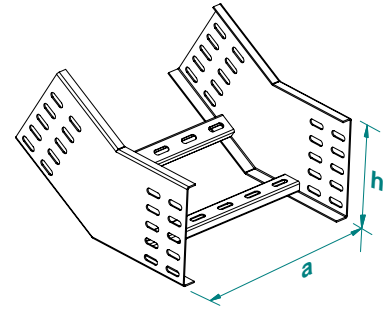

MIS30R2 H150 HDG

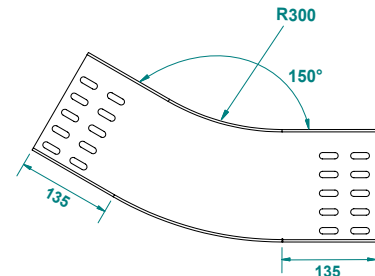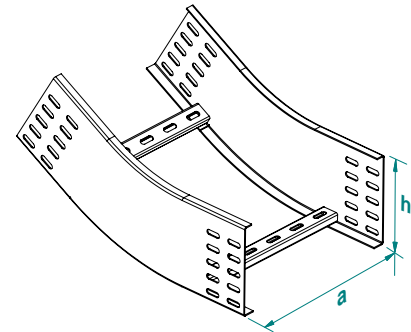

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0

Cable Ladder Systems of Side Height 150



MTK
MADE IN TURKEY

Vertical 30° Inside Bend of Cable Ladder (stable) Radius:450

30° Dikey Merdiven İç Bükey Elemanı-(Sabit) Radyus:450 - Арка фиксированная кабельроста, внутренняя 30° радиус:450



Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized

MIS30R3... H150		1.5mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
MIS30R3 1510 15 HDG	100	450	3.30	1	
MIS30R3 1515 15 HDG	150	450	3.46	1	
MIS30R3 1520 15 HDG	200	450	3.62	1	
MIS30R3 1525 15 HDG	250	450	3.78	1	
MIS30R3 1530 15 HDG	300	450	3.93	1	
MIS30R3 1540 15 HDG	400	450	4.25	1	
MIS30R3 1545 15 HDG	450	450	4.41	1	
MIS30R3 1550 15 HDG	500	450	4.57	1	
MIS30R3 1560 15 HDG	600	450	4.88	1	
MIS30R3 1570 15 HDG	700	450	5.20	1	
MIS30R3 1575 15 HDG	750	450	5.36	1	
MIS30R3 1580 15 HDG	800	450	5.52	1	
MIS30R3 1590 15 HDG	900	450	5.84	1	
MIS30R3 1500 15 HDG	1000	450	6.15	1	
MIS30R3 1502 15 HDG	1200	450	6.79	1	

MIS30R3... H150		2.0mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
MIS30R3 1510 20 HDG	100	450	4.40	1	
MIS30R3 1515 20 HDG	150	450	4.61	1	
MIS30R3 1520 20 HDG	200	450	4.82	1	
MIS30R3 1525 20 HDG	250	450	5.03	1	
MIS30R3 1530 20 HDG	300	450	5.24	1	
MIS30R3 1540 20 HDG	400	450	5.67	1	
MIS30R3 1545 20 HDG	450	450	5.88	1	
MIS30R3 1550 20 HDG	500	450	6.09	1	
MIS30R3 1560 20 HDG	600	450	6.51	1	
MIS30R3 1570 20 HDG	700	450	6.93	1	
MIS30R3 1575 20 HDG	750	450	7.15	1	
MIS30R3 1580 20 HDG	800	450	7.36	1	
MIS30R3 1590 20 HDG	900	450	7.78	1	
MIS30R3 1500 20 HDG	1000	450	8.20	1	
MIS30R3 1502 20 HDG	1200	450	9.05	1	

Vertical 30° Inside Bend of Cable Ladder (stable) Radius:600

30° Dikey Merdiven İç Bükey Elemanı-(Sabit) Radyus:600 - Арка фиксированная кабельроста, внутренняя 30° радиус:600



Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized



MIS30R4... H150		1.5mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
MIS30R4 1510 15 HDG	100	600	3.71	1	
MIS30R4 1515 15 HDG	150	600	3.87	1	
MIS30R4 1520 15 HDG	200	600	4.03	1	
MIS30R4 1525 15 HDG	250	600	4.19	1	
MIS30R4 1530 15 HDG	300	600	4.35	1	
MIS30R4 1540 15 HDG	400	600	4.67	1	
MIS30R4 1545 15 HDG	450	600	4.82	1	
MIS30R4 1550 15 HDG	500	600	4.98	1	
MIS30R4 1560 15 HDG	600	600	5.30	1	
MIS30R4 1570 15 HDG	700	600	5.62	1	
MIS30R4 1575 15 HDG	750	600	5.77	1	
MIS30R4 1580 15 HDG	800	600	5.93	1	
MIS30R4 1590 15 HDG	900	600	6.25	1	
MIS30R4 1500 15 HDG	1000	600	6.57	1	
MIS30R4 1502 15 HDG	1200	600	7.20	1	

MIS30R4... H150		2.0mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
MIS30R4 1510 20 HDG	100	600	4.95	1	
MIS30R4 1515 20 HDG	150	600	5.16	1	
MIS30R4 1520 20 HDG	200	600	5.37	1	
MIS30R4 1525 20 HDG	250	600	5.59	1	
MIS30R4 1530 20 HDG	300	600	5.80	1	
MIS30R4 1540 20 HDG	400	600	6.22	1	
MIS30R4 1545 20 HDG	450	600	6.43	1	
MIS30R4 1550 20 HDG	500	600	6.64	1	
MIS30R4 1560 20 HDG	600	600	7.06	1	
MIS30R4 1570 20 HDG	700	600	7.49	1	
MIS30R4 1575 20 HDG	750	600	7.70	1	
MIS30R4 1580 20 HDG	800	600	7.91	1	
MIS30R4 1590 20 HDG	900	600	8.33	1	
MIS30R4 1500 20 HDG	1000	600	8.75	1	
MIS30R4 1502 20 HDG	1200	600	9.60	1	

MIS30R3 H150 HDG

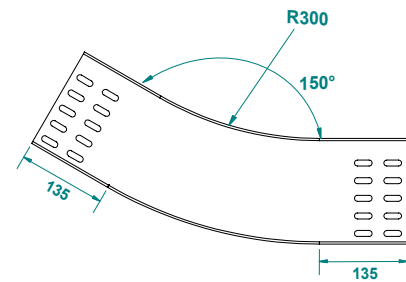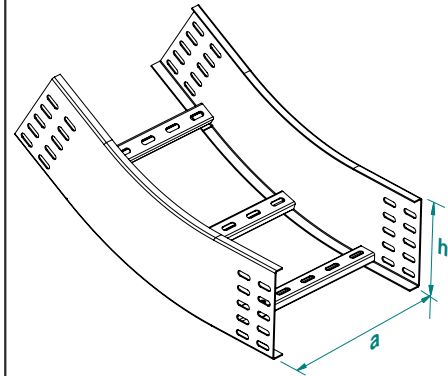

MIS30R4 H150 HDG

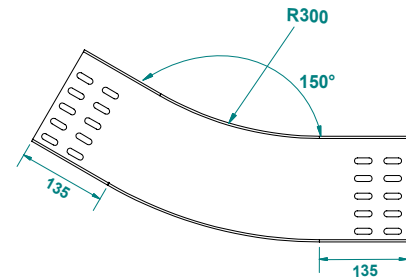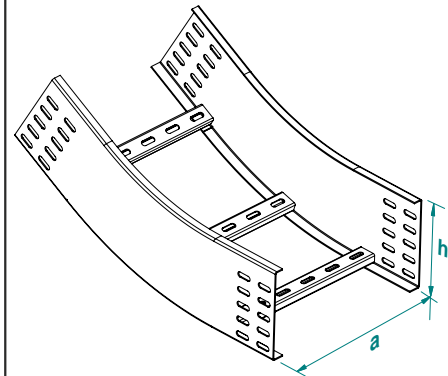

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method
to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: **1.5 2.0**

Cable Ladder Systems of Side Height 150



MTK
MADE IN TURKEY

Vertical 90° Outside Bend of Cable Ladder (stable)

90° Dikey Merdiven Dış Bükey Elemanı-(Sabit) - Арка фиксированная кабельроста, внешняя 90°



Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized

MDS... H150		1.5mm	
CODE	Width a=b mm	Radius R mm	kg 1pc
MDS 1510 15 HDG	100	150	2.65
MDS 1515 15 HDG	150	150	2.77
MDS 1520 15 HDG	200	150	2.90
MDS 1525 15 HDG	250	150	3.02
MDS 1530 15 HDG	300	150	3.14
MDS 1540 15 HDG	400	150	3.39
MDS 1545 15 HDG	450	150	3.51
MDS 1550 15 HDG	500	150	3.64
MDS 1560 15 HDG	600	150	3.88
MDS 1570 15 HDG	700	150	4.13
MDS 1575 15 HDG	750	150	4.26
MDS 1580 15 HDG	800	150	4.38
MDS 1590 15 HDG	900	150	4.63
MDS 1500 15 HDG	1000	150	4.87
MDS 1502 15 HDG	1200	150	5.37

MDS... H150		2.0mm	
CODE	Width a=b mm	Radius R mm	kg 1pc
MDS 1510 20 HDG	100	150	3.53
MDS 1515 20 HDG	150	150	3.69
MDS 1520 20 HDG	200	150	3.86
MDS 1525 20 HDG	250	150	4.02
MDS 1530 20 HDG	300	150	4.19
MDS 1540 20 HDG	400	150	4.52
MDS 1545 20 HDG	450	150	4.68
MDS 1550 20 HDG	500	150	4.85
MDS 1560 20 HDG	600	150	5.18
MDS 1570 20 HDG	700	150	5.51
MDS 1575 20 HDG	750	150	5.67
MDS 1580 20 HDG	800	150	5.84
MDS 1590 20 HDG	900	150	6.17
MDS 1500 20 HDG	1000	150	6.50
MDS 1502 20 HDG	1200	150	7.16

Vertical 90° Outside Bend of Cable Ladder (stable) Radius:300

90° Dikey Merdiven Dış Bükey Elemanı-(Sabit) Radyus:300 - Арка фиксированная кабельроста, внешняя 90° радиус:300



Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized



MDSR2... H150		1.5mm	
CODE	Width a=b mm	Radius R mm	kg 1pc
MDSR2 1510 15 HDG	100	300	5.48
MDSR2 1515 15 HDG	150	300	5.69
MDSR2 1520 15 HDG	200	300	5.90
MDSR2 1525 15 HDG	250	300	6.11
MDSR2 1530 15 HDG	300	300	6.32
MDSR2 1540 15 HDG	400	300	6.75
MDSR2 1545 15 HDG	450	300	6.96
MDSR2 1550 15 HDG	500	300	7.17
MDSR2 1560 15 HDG	600	300	7.59
MDSR2 1570 15 HDG	700	300	8.01
MDSR2 1575 15 HDG	750	300	8.23
MDSR2 1580 15 HDG	800	300	8.44
MDSR2 1590 15 HDG	900	300	8.86
MDSR2 1500 15 HDG	1000	300	9.28
MDSR2 1502 15 HDG	1200	300	10.13

MDSR2... H150		2.0mm	
CODE	Width a=b mm	Radius R mm	kg 1pc
MDSR2 1510 20 HDG	100	300	7.30
MDSR2 1515 20 HDG	150	300	7.59
MDSR2 1520 20 HDG	200	300	7.87
MDSR2 1525 20 HDG	250	300	8.15
MDSR2 1530 20 HDG	300	300	8.43
MDSR2 1540 20 HDG	400	300	8.99
MDSR2 1545 20 HDG	450	300	9.28
MDSR2 1550 20 HDG	500	300	9.56
MDSR2 1560 20 HDG	600	300	10.12
MDSR2 1570 20 HDG	700	300	10.68
MDSR2 1575 20 HDG	750	300	10.97
MDSR2 1580 20 HDG	800	300	11.25
MDSR2 1590 20 HDG	900	300	11.81
MDSR2 1500 20 HDG	1000	300	12.37
MDSR2 1502 20 HDG	1200	300	13.50

MDS H150 HDG

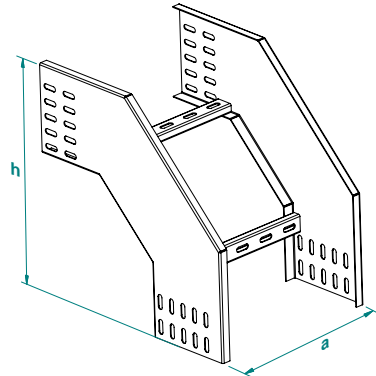

MDSR2 H150 HDG

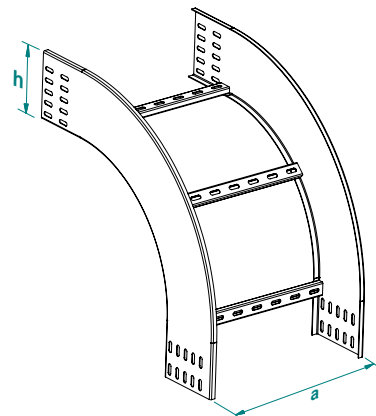

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method

to TS-EN 10346:2011 (PG)

SS- stainless steel AISI 304L and AISI 316L (SS)

EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0

Cable Ladder Systems of Side Height 150



MTK
MADE IN TURKEY

Vertical 90° Outside Bend of Cable Ladder (stable) Radius:450

90° Dikey Merdiven Dış Bükey Elemanı-(Sabit) Radyus:450 - Арка фиксированная кабельроста, внешняя 90° радиус:450



Hot-Dip Galvanized

Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

MDSR3... H150		1.5mm	
CODE	Width a=b mm	Radius R mm	kg 1pc
MDSR3 1510 15 HDG	100	450	6.10
MDSR3 1515 15 HDG	150	450	6.31
MDSR3 1520 15 HDG	200	450	6.52
MDSR3 1525 15 HDG	250	450	6.73
MDSR3 1530 15 HDG	300	450	6.95
MDSR3 1540 15 HDG	400	450	7.37
MDSR3 1545 15 HDG	450	450	7.58
MDSR3 1550 15 HDG	500	450	7.79
MDSR3 1560 15 HDG	600	450	8.21
MDSR3 1570 15 HDG	700	450	8.64
MDSR3 1575 15 HDG	750	450	8.85
MDSR3 1580 15 HDG	800	450	9.06
MDSR3 1590 15 HDG	900	450	9.48
MDSR3 1500 15 HDG	1000	450	9.90
MDSR3 1502 15 HDG	1200	450	10.75

MDSR3... H150		2.0mm	
CODE	Width a=b mm	Radius R mm	kg 1pc
MDSR3 1510 20 HDG	100	450	8.13
MDSR3 1515 20 HDG	150	450	8.41
MDSR3 1520 20 HDG	200	450	8.70
MDSR3 1525 20 HDG	250	450	8.98
MDSR3 1530 20 HDG	300	450	9.26
MDSR3 1540 20 HDG	400	450	9.82
MDSR3 1545 20 HDG	450	450	10.10
MDSR3 1550 20 HDG	500	450	10.39
MDSR3 1560 20 HDG	600	450	10.95
MDSR3 1570 20 HDG	700	450	11.51
MDSR3 1575 20 HDG	750	450	11.79
MDSR3 1580 20 HDG	800	450	12.08
MDSR3 1590 20 HDG	900	450	12.64
MDSR3 1500 20 HDG	1000	450	13.20
MDSR3 1502 20 HDG	1200	450	14.33

Vertical 90° Outside Bend of Cable Ladder (stable) Radius:600

90° Dikey Merdiven Dış Bükey Elemanı-(Sabit) Radyus:600 - Арка фиксированная кабельроста, внешняя 90° радиус:600



Hot-Dip Galvanized



Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8


MDSR4... H150		1.5mm	
CODE	Width a=b mm	Radius R mm	kg 1pc
MDSR4 1510 15 HDG	100	600	7.45
MDSR4 1515 15 HDG	150	600	7.71
MDSR4 1520 15 HDG	200	600	7.98
MDSR4 1525 15 HDG	250	600	8.24
MDSR4 1530 15 HDG	300	600	8.51
MDSR4 1540 15 HDG	400	600	9.03
MDSR4 1545 15 HDG	450	600	9.30
MDSR4 1550 15 HDG	500	600	9.56
MDSR4 1560 15 HDG	600	600	10.09
MDSR4 1570 15 HDG	700	600	10.62
MDSR4 1575 15 HDG	750	600	10.88
MDSR4 1580 15 HDG	800	600	11.15
MDSR4 1590 15 HDG	900	600	11.67
MDSR4 1500 15 HDG	1000	600	12.20
MDSR4 1502 15 HDG	1200	600	13.26

MDSR4... H150		2.0mm	
CODE	Width a=b mm	Radius R mm	kg 1pc
MDSR4 1510 20 HDG	100	600	9.93
MDSR4 1515 20 HDG	150	600	10.28
MDSR4 1520 20 HDG	200	600	10.64
MDSR4 1525 20 HDG	250	600	10.99
MDSR4 1530 20 HDG	300	600	11.34
MDSR4 1540 20 HDG	400	600	12.04
MDSR4 1545 20 HDG	450	600	12.40
MDSR4 1550 20 HDG	500	600	12.75
MDSR4 1560 20 HDG	600	600	13.45
MDSR4 1570 20 HDG	700	600	14.16
MDSR4 1575 20 HDG	750	600	14.51
MDSR4 1580 20 HDG	800	600	14.86
MDSR4 1590 20 HDG	900	600	15.56
MDSR4 1500 20 HDG	1000	600	16.27
MDSR4 1502 20 HDG	1200	600	17.68

MDSR3 H150 HDG

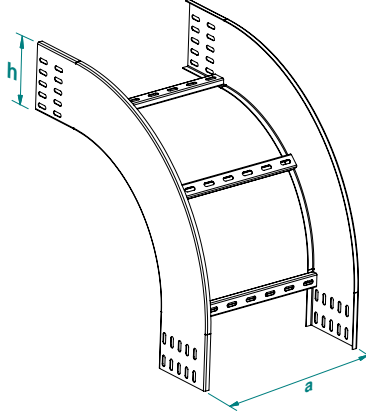

MDSR4 H150 HDG

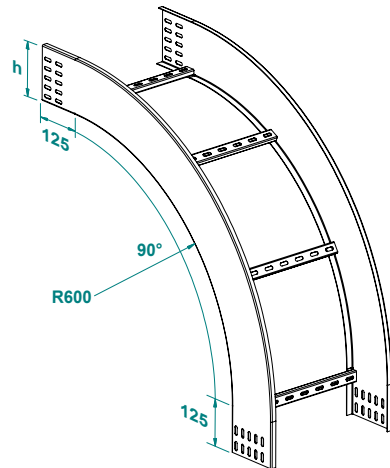

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0


Cable Ladder Systems of Side Height 150



MTK
MADE IN TURKEY

Vertical 60° Outside Bend of Cable Ladder (stable)

60° Dikey Merdiven Dış Bükey Elemanı-(Sabit) - Арка фиксированная кабельроста, внешняя 60°

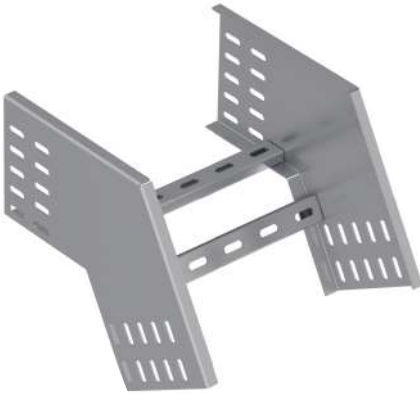

Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8


Hot-Dip Galvanized

MDS60... H150		1.5mm	
CODE	Width a=b mm	Radius R mm	kg 1pc
MDS60 1510 15 HDG	100	150	2.43
MDS60 1515 15 HDG	150	150	2.55
MDS60 1520 15 HDG	200	150	2.68
MDS60 1525 15 HDG	250	150	2.80
MDS60 1530 15 HDG	300	150	2.93
MDS60 1540 15 HDG	400	150	3.17
MDS60 1545 15 HDG	450	150	3.30
MDS60 1550 15 HDG	500	150	3.42
MDS60 1560 15 HDG	600	150	3.67
MDS60 1570 15 HDG	700	150	3.91
MDS60 1575 15 HDG	750	150	4.04
MDS60 1580 15 HDG	800	150	4.16
MDS60 1590 15 HDG	900	150	4.41
MDS60 1500 15 HDG	1000	150	4.66
MDS60 1502 15 HDG	1200	150	5.15

MDS60... H150		2.0mm	
CODE	Width a=b mm	Radius R mm	kg 1pc
MDS60 1510 20 HDG	100	150	3.24
MDS60 1515 20 HDG	150	150	3.40
MDS60 1520 20 HDG	200	150	3.57
MDS60 1525 20 HDG	250	150	3.73
MDS60 1530 20 HDG	300	150	3.90
MDS60 1540 20 HDG	400	150	4.23
MDS60 1545 20 HDG	450	150	4.39
MDS60 1550 20 HDG	500	150	4.56
MDS60 1560 20 HDG	600	150	4.89
MDS60 1570 20 HDG	700	150	5.22
MDS60 1575 20 HDG	750	150	5.38
MDS60 1580 20 HDG	800	150	5.55
MDS60 1590 20 HDG	900	150	5.88
MDS60 1500 20 HDG	1000	150	6.21
MDS60 1502 20 HDG	1200	150	6.87

Vertical 60° Outside Bend of Cable Ladder (stable) Radius:300

60° Dikey Merdiven Dış Bükey Elemanı-(Sabit) Radyus:300 - Арка фиксированная кабельроста, внешняя 60° радиус:300

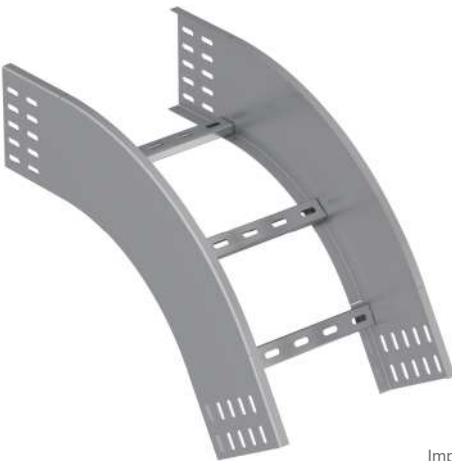

Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized



MDS60R2... H150		1.5mm	
CODE	Width a=b mm	Radius R mm	kg 1pc
MDS60R2 1510 15 HDG	100	300	3.71
MDS60R2 1515 15 HDG	150	300	3.87
MDS60R2 1520 15 HDG	200	300	4.03
MDS60R2 1525 15 HDG	250	300	4.19
MDS60R2 1530 15 HDG	300	300	4.35
MDS60R2 1540 15 HDG	400	300	4.67
MDS60R2 1545 15 HDG	450	300	4.82
MDS60R2 1550 15 HDG	500	300	4.98
MDS60R2 1560 15 HDG	600	300	5.30
MDS60R2 1570 15 HDG	700	300	5.62
MDS60R2 1575 15 HDG	750	300	5.77
MDS60R2 1580 15 HDG	800	300	5.93
MDS60R2 1590 15 HDG	900	300	6.25
MDS60R2 1500 15 HDG	1000	300	6.57
MDS60R2 1502 15 HDG	1200	300	7.20

MDS60R2... H150		2.0mm	
CODE	Width a=b mm	Radius R mm	kg 1pc
MDS60R2 1510 20 HDG	100	300	4.95
MDS60R2 1515 20 HDG	150	300	5.16
MDS60R2 1520 20 HDG	200	300	5.37
MDS60R2 1525 20 HDG	250	300	5.59
MDS60R2 1530 20 HDG	300	300	5.80
MDS60R2 1540 20 HDG	400	300	6.22
MDS60R2 1545 20 HDG	450	300	6.43
MDS60R2 1550 20 HDG	500	300	6.64
MDS60R2 1560 20 HDG	600	300	7.06
MDS60R2 1570 20 HDG	700	300	7.49
MDS60R2 1575 20 HDG	750	300	7.70
MDS60R2 1580 20 HDG	800	300	7.91
MDS60R2 1590 20 HDG	900	300	8.33
MDS60R2 1500 20 HDG	1000	300	8.75
MDS60R2 1502 20 HDG	1200	300	9.60

MDS60 H150 HDG

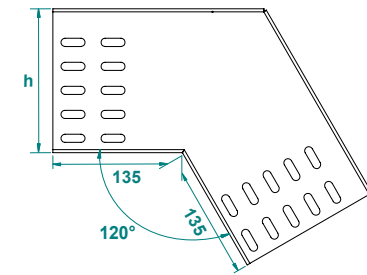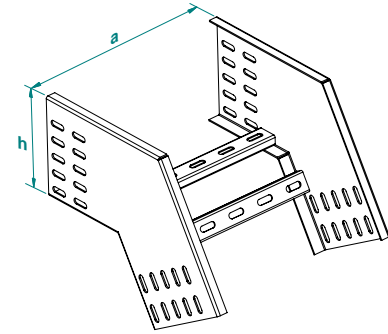

MDS60R2 H150 HDG

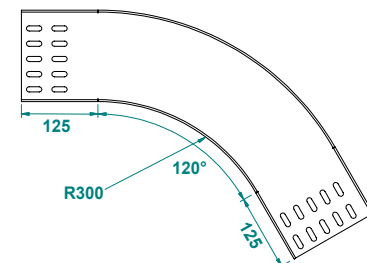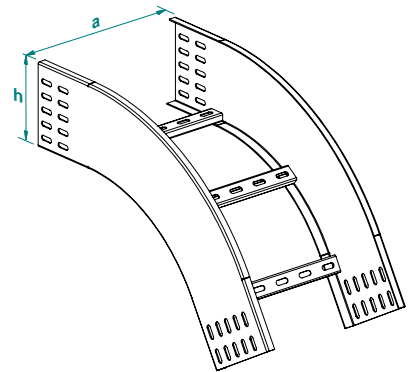

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method

to TS-EN 10346:2011 (PG)

SS- stainless steel AISI 304L and AISI 316L (SS)

EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0

Cable Ladder Systems of Side Height 150



MTK
MADE IN TURKEY

Vertical 60° Outside Bend of Cable Ladder (stable) Radius:450

90° Dikey Merdiven Dış Bükey Elemanı-(Sabit) Radyus:450 - Арка фиксированная кабельроста, внешняя 90° радиус:450



Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized

MDS60R3... H150					1.5mm
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
MDS60R3 1510 15 HDG	100	450	4.54	1	
MDS60R3 1515 15 HDG	150	450	4.70	1	
MDS60R3 1520 15 HDG	200	450	4.86	1	
MDS60R3 1525 15 HDG	250	450	5.02	1	
MDS60R3 1530 15 HDG	300	450	5.18	1	
MDS60R3 1540 15 HDG	400	450	5.49	1	
MDS60R3 1545 15 HDG	450	450	5.65	1	
MDS60R3 1550 15 HDG	500	450	5.81	1	
MDS60R3 1560 15 HDG	600	450	6.13	1	
MDS60R3 1570 15 HDG	700	450	6.45	1	
MDS60R2 1575 15 HDG	750	450	6.60	1	
MDS60R2 1580 15 HDG	800	450	6.76	1	
MDS60R2 1590 15 HDG	900	450	7.08	1	
MDS60R2 1500 15 HDG	1000	450	7.40	1	
MDS60R2 1502 15 HDG	1200	450	8.03	1	

MDS60R3... H150					2.0mm
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
MDS60R3 1510 20 HDG	100	450	6.06	1	
MDS60R3 1515 20 HDG	150	450	6.27	1	
MDS60R3 1520 20 HDG	200	450	6.48	1	
MDS60R3 1525 20 HDG	250	450	6.69	1	
MDS60R3 1530 20 HDG	300	450	6.90	1	
MDS60R3 1540 20 HDG	400	450	7.32	1	
MDS60R3 1545 20 HDG	450	450	7.54	1	
MDS60R3 1550 20 HDG	500	450	7.75	1	
MDS60R3 1560 20 HDG	600	450	8.17	1	
MDS60R3 1570 20 HDG	700	450	8.59	1	
MDS60R3 1575 20 HDG	750	450	8.80	1	
MDS60R3 1580 20 HDG	800	450	9.01	1	
MDS60R3 1590 20 HDG	900	450	9.44	1	
MDS60R3 1500 20 HDG	1000	450	9.86	1	
MDS60R3 1502 20 HDG	1200	450	10.07	1	

Vertical 60° Outside Bend of Cable Ladder (stable) Radius:600

60° Dikey Merdiven Dış Bükey Elemanı-(Sabit) Radyus:600 - Арка фиксированная кабельроста, внешняя 90° радиус:600



Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized



MDS60R4... H150					1.5mm
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
MDS60R4 1510 15 HDG	100	600	5.48	1	
MDS60R4 1515 15 HDG	150	600	5.59	1	
MDS60R4 1520 15 HDG	200	600	5.90	1	
MDS60R4 1525 15 HDG	250	600	6.11	1	
MDS60R4 1530 15 HDG	300	600	6.32	1	
MDS60R4 1540 15 HDG	400	600	6.75	1	
MDS60R4 1545 15 HDG	450	600	6.96	1	
MDS60R4 1550 15 HDG	500	600	7.17	1	
MDS60R4 1560 15 HDG	600	600	7.59	1	
MDS60R4 1570 15 HDG	700	600	8.01	1	
MDS60R4 1575 15 HDG	750	600	8.23	1	
MDS60R4 1580 15 HDG	800	600	8.44	1	
MDS60R4 1590 15 HDG	900	600	8.86	1	
MDS60R4 1500 15 HDG	1000	600	9.28	1	
MDS60R4 1502 15 HDG	1200	600	10.13	1	

MDS60R4... H150					2.0mm
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
MDS60R4 1510 20 HDG	100	600	7.30	1	
MDS60R4 1515 20 HDG	150	600	7.59	1	
MDS60R4 1520 20 HDG	200	600	7.87	1	
MDS60R4 1525 20 HDG	250	600	8.15	1	
MDS60R4 1530 20 HDG	300	600	8.43	1	
MDS60R4 1540 20 HDG	400	600	8.99	1	
MDS60R4 1545 20 HDG	450	600	9.28	1	
MDS60R4 1550 20 HDG	500	600	9.56	1	
MDS60R4 1560 20 HDG	600	600	10.12	1	
MDS60R4 1570 20 HDG	700	600	10.68	1	
MDS60R4 1575 20 HDG	750	600	10.97	1	
MDS60R4 1580 20 HDG	800	600	11.25	1	
MDS60R4 1590 20 HDG	900	600	11.81	1	
MDS60R4 1500 20 HDG	1000	600	12.37	1	
MDS60R4 1502 20 HDG	1200	600	13.50	1	

MDS60R3 H150 HDG

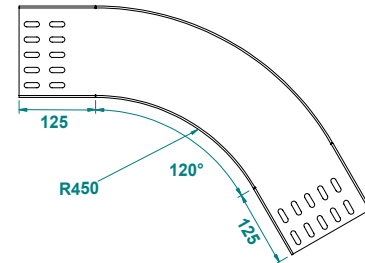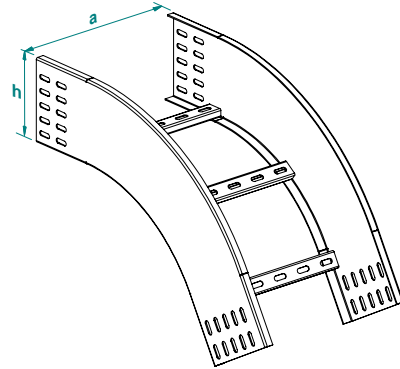

MDS60R4 H150 HDG

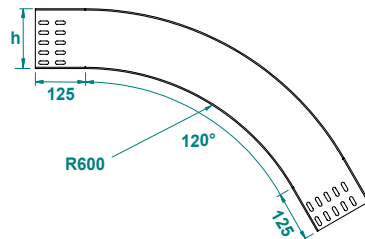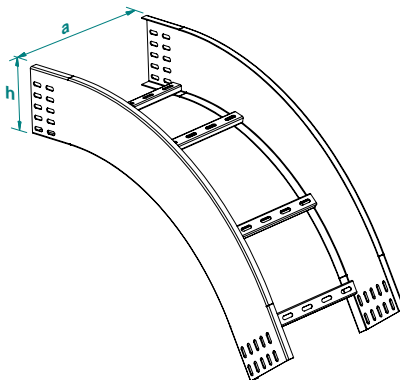

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: **1.5 2.0**

Vertical 45° Outside Bend of Cable Ladder (stable)

45° Dikey Merdiven Dış Bükey Elemanı-(Sabit) - Арка фиксированная кабельроста, внешняя 45°



Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized

MDS45... H150		1.5mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
MDS45 1510 15 HDG	100	150	1.48	1	
MDS45 1515 15 HDG	150	150	1.56	1	
MDS45 1520 15 HDG	200	150	1.64	1	
MDS45 1525 15 HDG	250	150	1.72	1	
MDS45 1530 15 HDG	300	150	1.81	1	
MDS45 1540 15 HDG	400	150	1.97	1	
MDS45 1545 15 HDG	450	150	2.05	1	
MDS45 1550 15 HDG	500	150	2.14	1	
MDS45 1560 15 HDG	600	150	2.30	1	
MDS45 1570 15 HDG	700	150	2.47	1	
MDS45 1575 15 HDG	750	150	2.55	1	
MDS45 1580 15 HDG	800	150	2.63	1	
MDS45 1590 15 HDG	900	150	2.80	1	
MDS45 1500 15 HDG	1000	150	2.96	1	
MDS45 1502 15 HDG	1200	150	3.29	1	

MDS45... H150		2.0mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
MDS45 1510 20 HDG	100	150	1.97	1	
MDS45 1515 20 HDG	150	150	2.08	1	
MDS45 1520 20 HDG	200	150	2.19	1	
MDS45 1525 20 HDG	250	150	2.30	1	
MDS45 1530 20 HDG	300	150	2.41	1	
MDS45 1540 20 HDG	400	150	2.63	1	
MDS45 1545 20 HDG	450	150	2.74	1	
MDS45 1550 20 HDG	500	150	2.85	1	
MDS45 1560 20 HDG	600	150	3.07	1	
MDS45 1570 20 HDG	700	150	3.29	1	
MDS45 1575 20 HDG	750	150	3.40	1	
MDS45 1580 20 HDG	800	150	3.51	1	
MDS45 1590 20 HDG	900	150	3.73	1	
MDS45 1500 20 HDG	1000	150	3.95	1	
MDS45 1502 20 HDG	1200	150	4.39	1	

Vertical 45° Outside Bend of Cable Ladder (stable) Radius:300

45° Dikey Merdiven Dış Bükey Elemanı-(Sabit) Radyus:300 - Арка фиксированная кабельроста, внешняя 45° радиус:300



Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized



MDS45R2... H150		1.5mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
MDS45R2 1510 15 HDG	100	300	3.09	1	
MDS45R2 1515 15 HDG	150	300	3.20	1	
MDS45R2 1520 15 HDG	200	300	3.30	1	
MDS45R2 1525 15 HDG	250	300	3.41	1	
MDS45R2 1530 15 HDG	300	300	3.51	1	
MDS45R2 1540 15 HDG	400	300	3.72	1	
MDS45R2 1545 15 HDG	450	300	3.83	1	
MDS45R2 1550 15 HDG	500	300	3.94	1	
MDS45R2 1560 15 HDG	600	300	4.15	1	
MDS45R2 1570 15 HDG	700	300	4.36	1	
MDS45R2 1575 15 HDG	750	300	4.46	1	
MDS45R2 1580 15 HDG	800	300	4.57	1	
MDS45R2 1590 15 HDG	900	300	4.78	1	
MDS45R2 1500 15 HDG	1000	300	4.99	1	
MDS45R2 1502 15 HDG	1200	300	5.41	1	

MDS45R2... H150		2.0mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
MDS45R2 1510 20 HDG	100	300	4.12	1	
MDS45R2 1515 20 HDG	150	300	4.26	1	
MDS45R2 1520 20 HDG	200	300	4.40	1	
MDS45R2 1525 20 HDG	250	300	4.54	1	
MDS45R2 1530 20 HDG	300	300	4.68	1	
MDS45R2 1540 20 HDG	400	300	4.96	1	
MDS45R2 1545 20 HDG	450	300	5.11	1	
MDS45R2 1550 20 HDG	500	300	5.25	1	
MDS45R2 1560 20 HDG	600	300	5.33	1	
MDS45R2 1570 20 HDG	700	300	5.81	1	
MDS45R2 1575 20 HDG	750	300	5.95	1	
MDS45R2 1580 20 HDG	800	300	6.09	1	
MDS45R2 1590 20 HDG	900	300	6.37	1	
MDS45R2 1500 20 HDG	1000	300	6.65	1	
MDS45R2 1502 20 HDG	1200	300	7.22	1	

MDS45 H150 HDG

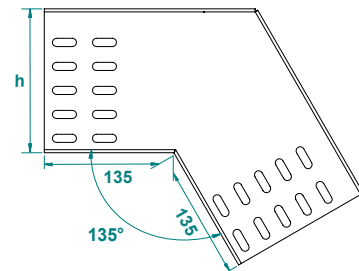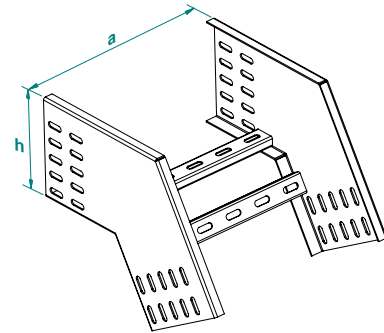

MDS45R2 H150 HDG

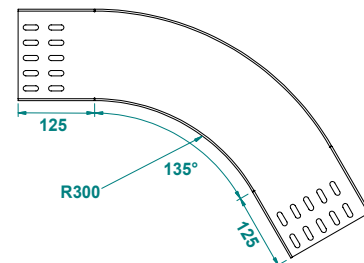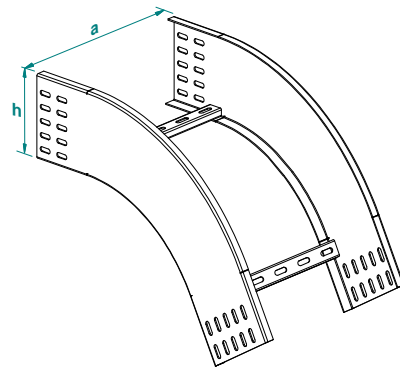

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method
to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0


Cable Ladder Systems of Side Height 150



MTK
MADE IN TURKEY

Vertical 45° Outside Bend of Cable Ladder (stable) Radius:450

45° Dikey Merdiven Dış Bükey Elemanı-(Sabit) -45° Dikey Merdiven Dış Bükey Elemanı-(Sabit) Radyus:450

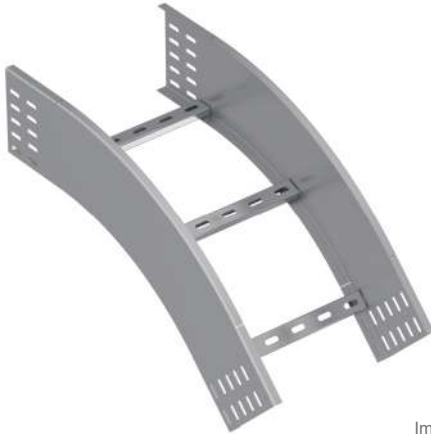

Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8


Hot-Dip Galvanized

MDS45R3... H150		1.5mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
MDS45R3 1510 15 HDG	100	450	3.82	1	
MDS45R3 1515 15 HDG	150	450	3.98	1	
MDS45R3 1520 15 HDG	200	450	4.14	1	
MDS45R3 1525 15 HDG	250	450	4.29	1	
MDS45R3 1530 15 HDG	300	450	4.45	1	
MDS45R3 1540 15 HDG	400	450	4.77	1	
MDS45R3 1545 15 HDG	450	450	4.93	1	
MDS45R3 1550 15 HDG	500	450	5.09	1	
MDS45R3 1560 15 HDG	600	450	5.40	1	
MDS45R3 1570 15 HDG	700	450	5.72	1	
MDS45R3 1575 15 HDG	750	450	5.88	1	
MDS45R3 1580 15 HDG	800	450	6.04	1	
MDS45R3 1590 15 HDG	900	450	6.35	1	
MDS45R3 1500 15 HDG	1000	450	6.67	1	
MDS45R3 1502 15 HDG	1200	450	7.30	1	

MDS45R3... H150		2.0mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
MDS45R3 1510 20 HDG	100	450	5.09	1	
MDS45R3 1515 20 HDG	150	450	5.30	1	
MDS45R3 1520 20 HDG	200	450	5.51	1	
MDS45R3 1525 20 HDG	250	450	5.72	1	
MDS45R3 1530 20 HDG	300	450	5.93	1	
MDS45R3 1540 20 HDG	400	450	6.36	1	
MDS45R3 1545 20 HDG	450	450	6.57	1	
MDS45R3 1550 20 HDG	500	450	6.78	1	
MDS45R3 1560 20 HDG	600	450	7.20	1	
MDS45R3 1570 20 HDG	700	450	7.62	1	
MDS45R3 1575 20 HDG	750	450	7.84	1	
MDS45R3 1580 20 HDG	800	450	8.05	1	
MDS45R3 1590 20 HDG	900	450	8.47	1	
MDS45R3 1500 20 HDG	1000	450	8.89	1	
MDS45R3 1502 20 HDG	1200	450	9.74	1	

Vertical 45° Outside Bend of Cable Ladder (stable) Radius:600

45° Dikey Merdiven Dış Bükey Elemanı-(Sabit) Radyus:600 - Арка фиксированная кабельроста, внешняя 45° радиус:600

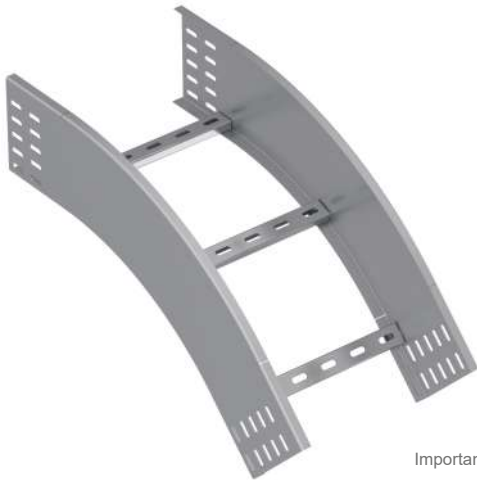

Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized



MDS45R4... H150		1.5mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
MDS45R4 1510 15 HDG	100	600	4.44	1	
MDS45R4 1515 15 HDG	150	600	4.60	1	
MDS45R4 1520 15 HDG	200	600	4.76	1	
MDS45R4 1525 15 HDG	250	600	4.92	1	
MDS45R4 1530 15 HDG	300	600	5.07	1	
MDS45R4 1540 15 HDG	400	600	5.39	1	
MDS45R4 1545 15 HDG	450	600	5.55	1	
MDS45R4 1550 15 HDG	500	600	5.71	1	
MDS45R4 1560 15 HDG	600	600	6.02	1	
MDS45R4 1570 15 HDG	700	600	6.34	1	
MDS45R4 1575 15 HDG	750	600	6.50	1	
MDS45R4 1580 15 HDG	800	600	6.66	1	
MDS45R4 1590 15 HDG	900	600	6.98	1	
MDS45R4 1500 15 HDG	1000	600	7.29	1	
MDS45R4 1502 15 HDG	1200	600	7.93	1	

MDS45R4... H150		2.0mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
MDS45R4 1510 20 HDG	100	600	5.92	1	
MDS45R4 1515 20 HDG	150	600	6.13	1	
MDS45R4 1520 20 HDG	200	600	6.34	1	
MDS45R4 1525 20 HDG	250	600	6.55	1	
MDS45R4 1530 20 HDG	300	600	6.76	1	
MDS45R4 1540 20 HDG	400	600	7.19	1	
MDS45R4 1545 20 HDG	450	600	7.40	1	
MDS45R4 1550 20 HDG	500	600	7.61	1	
MDS45R4 1560 20 HDG	600	600	8.03	1	
MDS45R4 1570 20 HDG	700	600	8.45	1	
MDS45R4 1575 20 HDG	750	600	8.67	1	
MDS45R4 1580 20 HDG	800	600	8.88	1	
MDS45R4 1590 20 HDG	900	600	9.30	1	
MDS45R4 1500 20 HDG	1000	600	9.72	1	
MDS45R4 1502 20 HDG	1200	600	10.57	1	

MDS45R3 H150 HDG

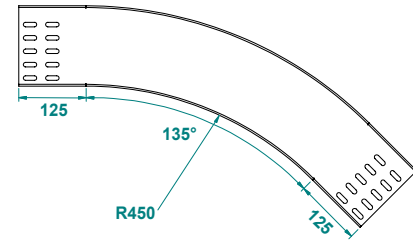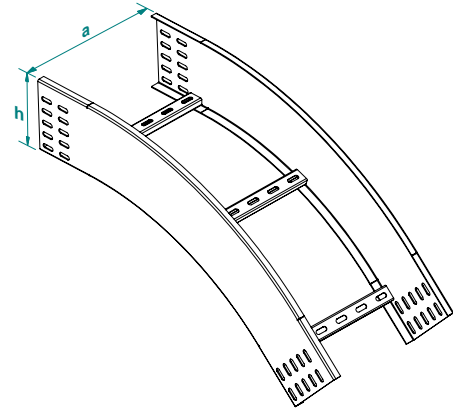

MDS45R4 H150 HDG

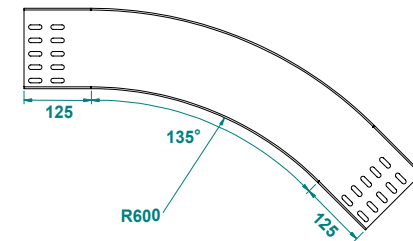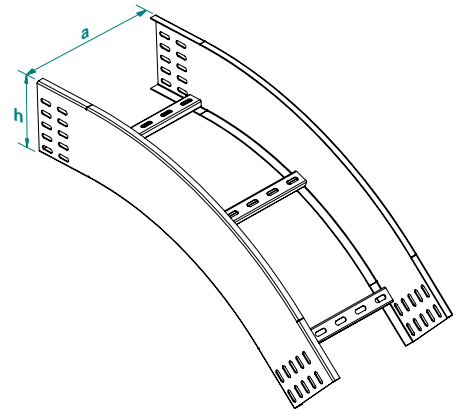

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method
to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0

Cable Ladder Systems of Side Height 150



MTK
MADE IN TURKEY

Vertical 30° Outside Bend of Cable Ladder (stable)

30° Dikey Merdiven Dış Bükey Elemanı-(Sabit) - Арка фиксированная кабельроста, внешняя 30°



Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized

MDS30... H150		1.5mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
MDS30 1510 15 HDG	100	150	1.48	1	
MDS30 1515 15 HDG	150	150	1.56	1	
MDS30 1520 15 HDG	200	150	1.64	1	
MDS30 1525 15 HDG	250	150	1.72	1	
MDS30 1530 15 HDG	300	150	1.81	1	
MDS30 1540 15 HDG	400	150	1.97	1	
MDS30 1545 15 HDG	450	150	2.05	1	
MDS30 1550 15 HDG	500	150	2.14	1	
MDS30 1560 15 HDG	600	150	2.30	1	
MDS30 1570 15 HDG	700	150	2.47	1	
MDS30 1575 15 HDG	750	150	2.55	1	
MDS30 1580 15 HDG	800	150	2.63	1	
MDS30 1590 15 HDG	900	150	2.80	1	
MDS30 1500 15 HDG	1000	150	2.96	1	
MDS30 1502 15 HDG	1200	150	3.29	1	

MDS30... H150		2.0mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
MDS30 1510 20 HDG	100	150	1.97	1	
MDS30 1515 20 HDG	150	150	2.08	1	
MDS30 1520 20 HDG	200	150	2.19	1	
MDS30 1525 20 HDG	250	150	2.30	1	
MDS30 1530 20 HDG	300	150	2.41	1	
MDS30 1540 20 HDG	400	150	2.63	1	
MDS30 1545 20 HDG	450	150	2.74	1	
MDS30 1550 20 HDG	500	150	2.85	1	
MDS30 1560 20 HDG	600	150	3.07	1	
MDS30 1570 20 HDG	700	150	3.29	1	
MDS30 1575 20 HDG	750	150	3.40	1	
MDS30 1580 20 HDG	800	150	3.51	1	
MDS30 1590 20 HDG	900	150	3.73	1	
MDS30 1500 20 HDG	1000	150	3.95	1	
MDS30 1502 20 HDG	1200	150	4.39	1	

Vertical 30° Outside Bend of Cable Ladder (stable) Radius:300

30° Dikey Merdiven Dış Bükey Elemanı-(Sabit) Radyus:300 - Арка фиксированная кабельроста, внешняя 30° радиус:300



Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized



MDS30R2... H150		1.5mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
MDS30R2 1510 15 HDG	100	300	2.57	1	
MDS30R2 1515 15 HDG	150	300	2.68	1	
MDS30R2 1520 15 HDG	200	300	2.78	1	
MDS30R2 1525 15 HDG	250	300	2.89	1	
MDS30R2 1530 15 HDG	300	300	3.00	1	
MDS30R2 1540 15 HDG	400	300	3.21	1	
MDS30R2 1545 15 HDG	450	300	3.31	1	
MDS30R2 1550 15 HDG	500	300	3.42	1	
MDS30R2 1560 15 HDG	600	300	3.63	1	
MDS30R2 1570 15 HDG	700	300	3.84	1	
MDS30R2 1575 15 HDG	750	300	3.95	1	
MDS30R2 1580 15 HDG	800	300	4.05	1	
MDS30R2 1590 15 HDG	900	300	4.26	1	
MDS30R2 1500 15 HDG	1000	300	4.47	1	
MDS30R2 1502 15 HDG	1200	300	4.90	1	

MDS30R2... H150		2.0mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
MDS30R2 1510 20 HDG	100	300	3.43	1	
MDS30R2 1515 20 HDG	150	300	3.57	1	
MDS30R2 1520 20 HDG	200	300	3.71	1	
MDS30R2 1525 20 HDG	250	300	3.85	1	
MDS30R2 1530 20 HDG	300	300	3.99	1	
MDS30R2 1540 20 HDG	400	300	4.27	1	
MDS30R2 1545 20 HDG	450	300	4.41	1	
MDS30R2 1550 20 HDG	500	300	4.56	1	
MDS30R2 1560 20 HDG	600	300	4.84	1	
MDS30R2 1570 20 HDG	700	300	5.12	1	
MDS30R2 1575 20 HDG	750	300	5.26	1	
MDS30R2 1580 20 HDG	800	300	5.40	1	
MDS30R2 1590 20 HDG	900	300	5.68	1	
MDS30R2 1500 20 HDG	1000	300		1	
MDS30R2 1502 20 HDG	1200	300	4.58	1	

MDS30 H150 HDG

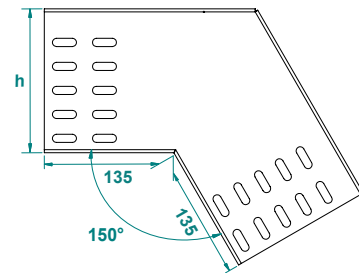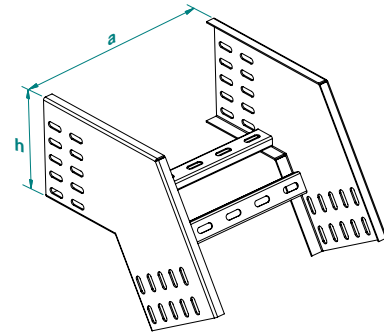

MDS30R2 H150 HDG

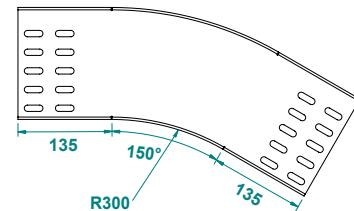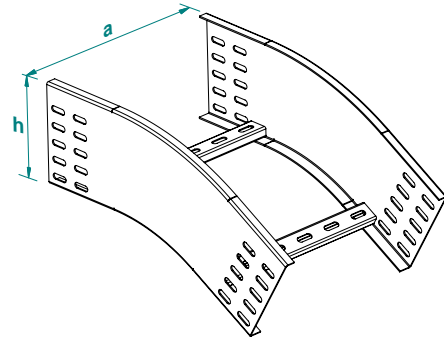

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method

to TS-EN 10346:2011 (PG)

SS- stainless steel AISI 304L and AISI 316L (SS)

EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0

Cable Ladder Systems of Side Height 150



MTK
MADE IN TURKEY

Vertical 30° Outside Bend of Cable Ladder (stable) Radius:450

30° Dikey Merdiven Dış Bükey Elemanı-(Sabit) Radyus:450 - Арка фиксированная кабельроста, внешняя 30° радиус:450



Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized

MDS30R3... H150		1.5mm		
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs
MDS30R3 1510 15 HDG	100	450	2.99	1
MDS30R3 1515 15 HDG	150	450	3.09	1
MDS30R3 1520 15 HDG	200	450	3.20	1
MDS30R3 1525 15 HDG	250	450	3.30	1
MDS30R3 1530 15 HDG	300	450	3.41	1
MDS30R3 1540 15 HDG	400	450	3.62	1
MDS30R3 1545 15 HDG	450	450	3.73	1
MDS30R3 1550 15 HDG	500	450	3.83	1
MDS30R3 1560 15 HDG	600	450	4.04	1
MDS30R3 1570 15 HDG	700	450	4.25	1
MDS30R3 1575 15 HDG	750	450	4.36	1
MDS30R3 1580 15 HDG	800	450	4.47	1
MDS30R3 1590 15 HDG	900	450	4.68	1
MDS30R3 1500 15 HDG	1000	450	4.89	1
MDS30R3 1502 15 HDG	1200	450	5.31	1

MDS30R3... H150		2.0mm		
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs
MDS30R3 1510 20 HDG	100	450	3.98	1
MDS30R3 1515 20 HDG	150	450	4.12	1
MDS30R3 1520 20 HDG	200	450	4.26	1
MDS30R3 1525 20 HDG	250	450	4.40	1
MDS30R3 1530 20 HDG	300	450	4.54	1
MDS30R3 1540 20 HDG	400	450	4.83	1
MDS30R3 1545 20 HDG	450	450	4.97	1
MDS30R3 1550 20 HDG	500	450	5.11	1
MDS30R3 1560 20 HDG	600	450	5.39	1
MDS30R3 1570 20 HDG	700	450	5.67	1
MDS30R3 1575 20 HDG	750	450	5.81	1
MDS30R3 1580 20 HDG	800	450	5.95	1
MDS30R3 1590 20 HDG	900	450	6.23	1
MDS30R3 1500 20 HDG	1000	450	6.52	1
MDS30R3 1502 20 HDG	1200	450	7.08	1

Vertical 30° Outside Bend of Cable Ladder (stable) Radius:600

30° Dikey Merdiven Dış Bükey Elemanı-(Sabit) Radyus:600 - Арка фиксированная кабельроста, внешняя 30° радиус:600



Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized



MDS30R4... H150		1.5mm		
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs
MDS30R4 1510 15 HDG	100	600	3.51	1
MDS30R4 1515 15 HDG	150	600	3.67	1
MDS30R4 1520 15 HDG	200	600	3.82	1
MDS30R4 1525 15 HDG	250	600	3.98	1
MDS30R4 1530 15 HDG	300	600	4.14	1
MDS30R4 1540 15 HDG	400	600	4.46	1
MDS30R4 1545 15 HDG	450	600	4.62	1
MDS30R4 1550 15 HDG	500	600	4.78	1
MDS30R4 1560 15 HDG	600	600	5.09	1
MDS30R4 1570 15 HDG	700	600	5.41	1
MDS30R4 1575 15 HDG	750	600	5.57	1
MDS30R4 1580 15 HDG	800	600	5.73	1
MDS30R4 1590 15 HDG	900	600	6.04	1
MDS30R4 1500 15 HDG	1000	600	6.36	1
MDS30R4 1502 15 HDG	1200	600	6.99	1

MDS30R4... H150		2.0mm		
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs
MDS30R4 1510 20 HDG	100	600	4.68	1
MDS30R4 1515 20 HDG	150	600	4.89	1
MDS30R4 1520 20 HDG	200	600	5.10	1
MDS30R4 1525 20 HDG	250	600	5.31	1
MDS30R4 1530 20 HDG	300	600	5.52	1
MDS30R4 1540 20 HDG	400	600	5.94	1
MDS30R4 1545 20 HDG	450	600	6.15	1
MDS30R4 1550 20 HDG	500	600	6.37	1
MDS30R4 1560 20 HDG	600	600	6.79	1
MDS30R4 1570 20 HDG	700	600	7.21	1
MDS30R4 1575 20 HDG	750	600	7.42	1
MDS30R4 1580 20 HDG	800	600	7.63	1
MDS30R4 1590 20 HDG	900	600	8.06	1
MDS30R4 1500 20 HDG	1000	600	8.48	1
MDS30R4 1502 20 HDG	1200	600	9.32	1

MDS30R3 H150 HDG

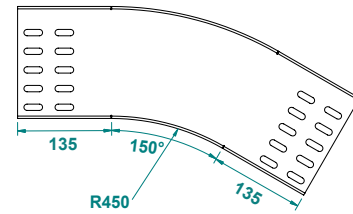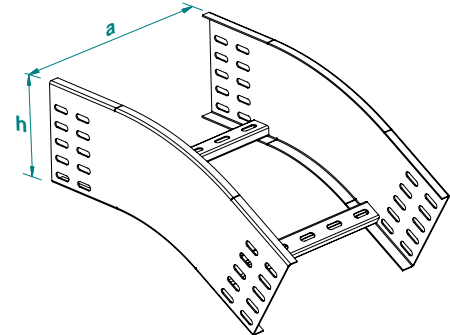

MDS30R4 H150 HDG

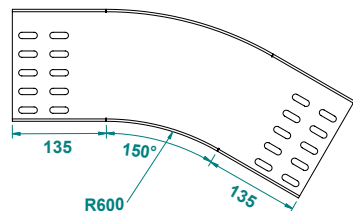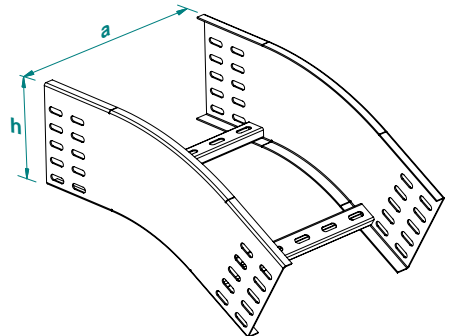

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0

Modular Inside - Outside Cable Ladder Bend

Modular Merdiven iniş - çıkış dönüşü - Шарнирная дуга кабельроста



Hot-Dip Galvanized

MMD = 2 pc of MMB + 2 set of BDD
MMD = 2 ADET MMB + 2 Takım BDD'den oluşmaktadır.

MMD... H150		1.5mm		
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs
MMD 1510 15 HDG	100	300	3.98	1
MMD 1515 15 HDG	150	300	4.07	1
MMD 1520 15 HDG	200	300	4.15	1
MMD 1525 15 HDG	250	300	4.23	1
MMD 1530 15 HDG	300	300	4.31	1
MMD 1540 15 HDG	400	300	4.48	1
MMD 1545 15 HDG	450	300	4.56	1
MMD 1550 15 HDG	500	300	4.64	1
MMD 1560 15 HDG	600	300	4.81	1
MMD 1570 15 HDG	700	300	4.97	1
MMD 1575 15 HDG	750	300	5.06	1
MMD 1580 15 HDG	800	300	5.14	1
MMD 1590 15 HDG	900	300	5.30	1
MMD 1500 15 HDG	1000	300	5.47	1
MMD 1502 15 HDG	1200	300	5.80	1

MMD... H150		2.0mm		
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs
MMD 1510 20 HDG	100	300	5.31	1
MMD 1515 20 HDG	150	300	5.42	1
MMD 1520 20 HDG	200	300	5.53	1
MMD 1525 20 HDG	250	300	5.64	1
MMD 1530 20 HDG	300	300	5.75	1
MMD 1540 20 HDG	400	300	5.97	1
MMD 1545 20 HDG	450	300	6.08	1
MMD 1550 20 HDG	500	300	6.19	1
MMD 1560 20 HDG	600	300	6.41	1
MMD 1570 20 HDG	700	300	6.63	1
MMD 1575 20 HDG	750	300	6.74	1
MMD 1580 20 HDG	800	300	6.85	1
MMD 1590 20 HDG	900	300	7.07	1
MMD 1500 20 HDG	1000	300	7.29	1
MMD 1502 20 HDG	1200	300	7.73	1

Modular Adjustable Cable Ladder Riser

Modular Merdiven iniş - çıkış elemanı - Шарнирный элемент дуги кабельроста




Hot-Dip Galvanized

Important!
To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8


MMB... H150		1.5mm		
CODE	Width a=b mm	kg 1pc	pcs	
MMB 1510 15 HDG	100	1.39	1	
MMB 1515 15 HDG	150	1.44	1	
MMB 1520 15 HDG	200	1.48	1	
MMB 1525 15 HDG	250	1.52	1	
MMB 1530 15 HDG	300	1.56	1	
MMB 1540 15 HDG	400	1.64	1	
MMB 1545 15 HDG	450	1.68	1	
MMB 1550 15 HDG	500	1.72	1	
MMB 1560 15 HDG	600	1.81	1	
MMB 1570 15 HDG	700	1.89	1	
MMB 1575 15 HDG	750	1.93	1	
MMB 1580 15 HDG	800	1.97	1	
MMB 1590 15 HDG	900	2.05	1	
MMB 1500 15 HDG	1000	2.14	1	
MMB 1502 15 HDG	1200	2.30	1	

MMB... H150		2.0mm		
CODE	Width a=b mm	kg 1pc	pcs	
MMB 1510 20 HDG	100	1.86	1	
MMB 1515 20 HDG	150	1.91	1	
MMB 1520 20 HDG	200	1.97	1	
MMB 1525 20 HDG	250	2.02	1	
MMB 1530 20 HDG	300	2.08	1	
MMB 1540 20 HDG	400	2.19	1	
MMB 1545 20 HDG	450	2.24	1	
MMB 1550 20 HDG	500	2.30	1	
MMB 1560 20 HDG	600	2.41	1	
MMB 1570 20 HDG	700	2.52	1	
MMB 1575 20 HDG	750	2.57	1	
MMB 1580 20 HDG	800	2.63	1	
MMB 1590 20 HDG	900	2.74	1	
MMB 1500 20 HDG	1000	2.85	1	
MMB 1502 20 HDG	1200	3.07	1	

MMD H150 HDG

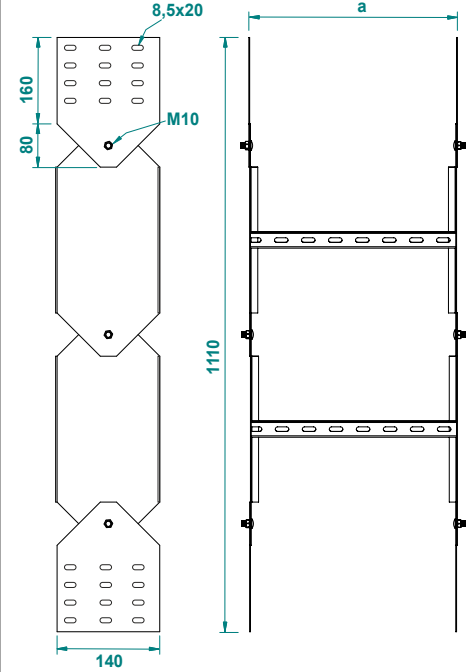

MMB H150 HDG

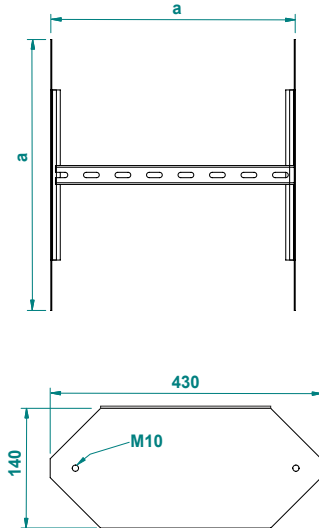

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method
to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0

Cable Ladder Systems of Side Height 150



MTK
MADE IN TURKEY

Vertical Tee Bend of Cable Ladder, Lengthwise

Dikey "T" Merdiven Dönüş Elemanı - T-отвод кабельлоста вертикальный, развернутый



Hot-Dip Galvanized

Important!


To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

MDT... H150		1.5mm	
CODE	Width a=b mm	kg 1pc	pcs
MDT 1510 15 HDG	100	4.57	1
MDT 1515 15 HDG	150	5.10	1
MDT 1520 15 HDG	200	5.63	1
MDT 1525 15 HDG	250	6.16	1
MDT 1530 15 HDG	300	6.69	1
MDT 1540 15 HDG	400	7.75	1
MDT 1545 15 HDG	450	8.28	1
MDT 1550 15 HDG	500	8.81	1
MDT 1560 15 HDG	600	9.87	1
MDT 1570 15 HDG	700	10.93	1
MDT 1575 15 HDG	750	11.46	1
MDT 1580 15 HDG	800	11.99	1
MDT 1590 15 HDG	900	13.05	1
MDT 1500 15 HDG	1000	14.11	1
MDT 1502 15 HDG	1200	16.23	1

MDT... H150		2.0mm	
CODE	Width a=b mm	kg 1pc	pcs
MDT 1510 20 HDG	100	6.09	1
MDT 1515 20 HDG	150	6.80	1
MDT 1520 20 HDG	200	7.50	1
MDT 1525 20 HDG	250	8.21	1
MDT 1530 20 HDG	300	8.92	1
MDT 1540 20 HDG	400	10.33	1
MDT 1545 20 HDG	450	11.04	1
MDT 1550 20 HDG	500	11.74	1
MDT 1560 20 HDG	600	13.16	1
MDT 1570 20 HDG	700	14.57	1
MDT 1575 20 HDG	750	15.27	1
MDT 1580 20 HDG	800	15.98	1
MDT 1590 20 HDG	900	17.39	1
MDT 1500 20 HDG	1000	18.81	1
MDT 1502 20 HDG	1200	21.63	1

Vertical Tee Bend of Cable Ladder from the Middle

Dikey Ortadan "T" Merdiven Dönüş Elemanı - T-отвод кабельлоста вертикальный, прямой

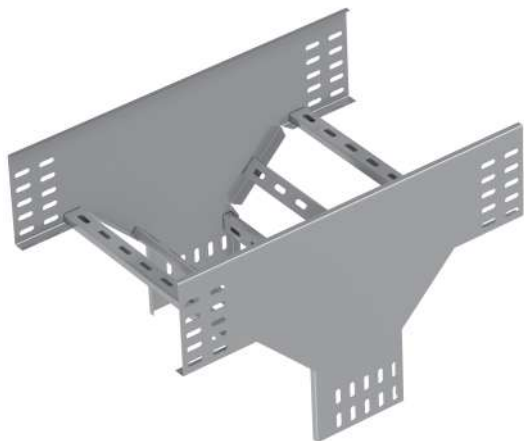

Hot-Dip Galvanized



Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

MMT... H150		1.5mm	
CODE	Width a=b mm	kg 1pc	pcs
MMT 1510 15 HDG	100	4.73	1
MMT 1515 15 HDG	150	4.93	1
MMT 1520 15 HDG	200	5.14	1
MMT 1525 15 HDG	250	5.34	1
MMT 1530 15 HDG	300	5.55	1
MMT 1540 15 HDG	400	5.96	1
MMT 1545 15 HDG	450	6.17	1
MMT 1550 15 HDG	500	6.38	1
MMT 1560 15 HDG	600	6.79	1
MMT 1570 15 HDG	700	7.20	1
MMT 1575 15 HDG	750	7.41	1
MMT 1580 15 HDG	800	7.61	1
MMT 1590 15 HDG	900	8.02	1
MMT 1500 15 HDG	1000	8.44	1
MMT 1502 15 HDG	1200	9.26	1


MMT... H150		2.0mm	
CODE	Width a=b mm	kg 1pc	pcs
MMT 1510 20 HDG	100	6.30	1
MMT 1515 20 HDG	150	6.58	1
MMT 1520 20 HDG	200	6.85	1
MMT 1525 20 HDG	250	7.12	1
MMT 1530 20 HDG	300	7.40	1
MMT 1540 20 HDG	400	7.95	1
MMT 1545 20 HDG	450	8.22	1
MMT 1550 20 HDG	500	8.50	1
MMT 1560 20 HDG	600	9.05	1
MMT 1570 20 HDG	700	9.60	1
MMT 1575 20 HDG	750	9.87	1
MMT 1580 20 HDG	800	10.15	1
MMT 1590 20 HDG	900	10.70	1
MMT 1500 20 HDG	1000	11.25	1
MMT 1502 20 HDG	1200	12.35	1

MDT H150 HDG

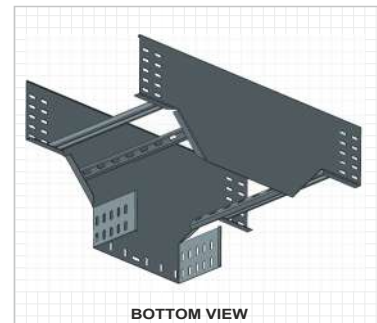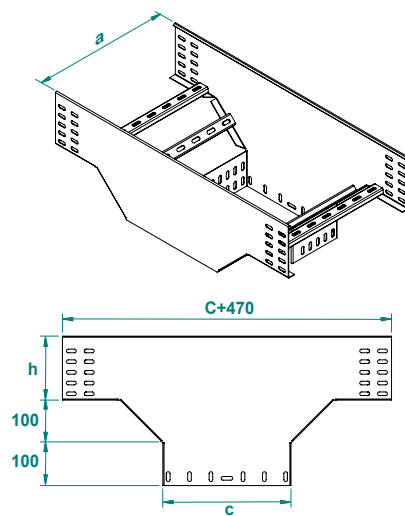

BOTTOM VIEW

MMT H150 HDG

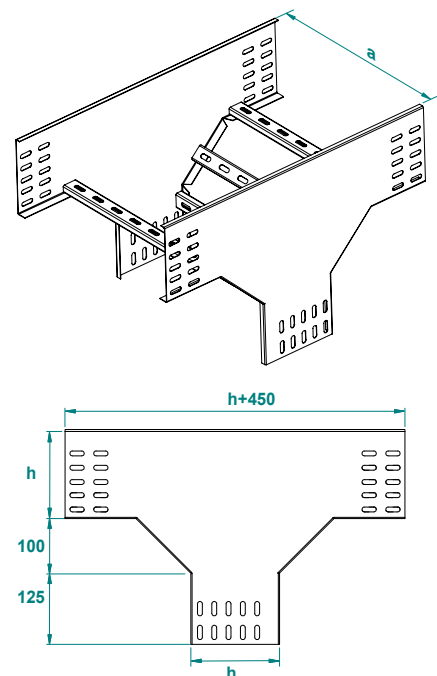

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method
to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0

Cable Ladder Systems of Side Height 150



MTK
MADE IN TURKEY

Vertical Tee Bend of Cable Ladder from the Middle Radius:300

Dikey Ortadan "T" Merdiven Dönüş Elemanı Radyus:300 - T-отвод кабельроста вертикальный, прямой радиус:300



Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8


Hot-Dip Galvanized

MMTR2... H150		1.5mm	
CODE	Width a=b mm	Radius R mm	kg 1pc
MMTR2 1510 15 HDG	100	300	9.33
MMTR2 1515 15 HDG	150	300	9.56
MMTR2 1520 15 HDG	200	300	9.79
MMTR2 1525 15 HDG	250	300	10.02
MMTR2 1530 15 HDG	300	300	10.25
MMTR2 1540 15 HDG	400	300	10.71
MMTR2 1545 15 HDG	450	300	10.94
MMTR2 1550 15 HDG	500	300	11.17
MMTR2 1560 15 HDG	600	300	11.63
MMTR2 1570 15 HDG	700	300	12.09
MMTR2 1575 15 HDG	750	300	12.32
MMTR2 1580 15 HDG	800	300	12.55
MMTR2 1590 15 HDG	900	300	13.01
MMTR2 1500 15 HDG	1000	300	13.47
MMTR2 1502 15 HDG	1200	300	14.38

MMTR2... H150		2.0mm	
CODE	Width a=b mm	Radius R mm	kg 1pc
MMTR2 1510 20 HDG	100	300	12.44
MMTR2 1515 20 HDG	150	300	12.75
MMTR2 1520 20 HDG	200	300	13.05
MMTR2 1525 20 HDG	250	300	13.36
MMTR2 1530 20 HDG	300	300	13.67
MMTR2 1540 20 HDG	400	300	14.28
MMTR2 1545 20 HDG	450	300	14.58
MMTR2 1550 20 HDG	500	300	14.89
MMTR2 1560 20 HDG	600	300	15.50
MMTR2 1570 20 HDG	700	300	16.11
MMTR2 1575 20 HDG	750	300	16.42
MMTR2 1580 20 HDG	800	300	16.73
MMTR2 1590 20 HDG	900	300	17.34
MMTR2 1500 20 HDG	1000	300	17.95
MMTR2 1502 20 HDG	1200	300	19.18

Vertical Tee Bend of Cable Ladder from the Middle Radius:600

Dikey Ortadan "T" Merdiven Dönüş Elemanı Radyus:600 - T-отвод кабельроста вертикальный, прямой радиус:600

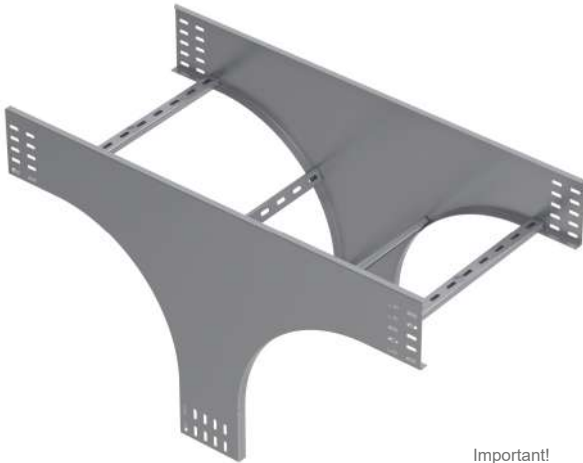

Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized



MMTR4... H150		1.5mm	
CODE	Width a=b mm	Radius R mm	kg 1pc
MMTR4 1510 15 HDG	100	600	15.99
MMTR4 1515 15 HDG	150	600	16.40
MMTR4 1520 15 HDG	200	600	16.81
MMTR4 1525 15 HDG	250	600	17.23
MMTR4 1530 15 HDG	300	600	17.64
MMTR4 1540 15 HDG	400	600	18.47
MMTR4 1545 15 HDG	450	600	18.88
MMTR4 1550 15 HDG	500	600	19.29
MMTR4 1560 15 HDG	600	600	20.21
MMTR4 1570 15 HDG	700	600	20.95
MMTR4 1575 15 HDG	750	600	21.36
MMTR4 1580 15 HDG	800	600	21.77
MMTR4 1590 15 HDG	900	600	22.60
MMTR4 1500 15 HDG	1000	600	23.43
MMTR4 1502 15 HDG	1200	600	25.08

MMTR4... H150		2.0mm	
CODE	Width a=b mm	Radius R mm	kg 1pc
MMTR4 1510 20 HDG	100	600	21.31
MMTR4 1515 20 HDG	150	600	21.87
MMTR4 1520 20 HDG	200	600	22.42
MMTR4 1525 20 HDG	250	600	22.97
MMTR4 1530 20 HDG	300	600	23.52
MMTR4 1540 20 HDG	400	600	24.62
MMTR4 1545 20 HDG	450	600	25.17
MMTR4 1550 20 HDG	500	600	25.72
MMTR4 1560 20 HDG	600	600	26.83
MMTR4 1570 20 HDG	700	600	27.93
MMTR4 1575 20 HDG	750	600	28.48
MMTR4 1580 20 HDG	800	600	29.03
MMTR4 1590 20 HDG	900	600	30.13
MMTR4 1500 20 HDG	1000	600	31.23
MMTR4 1502 20 HDG	1200	600	33.44

MMTR2 H150 HDG

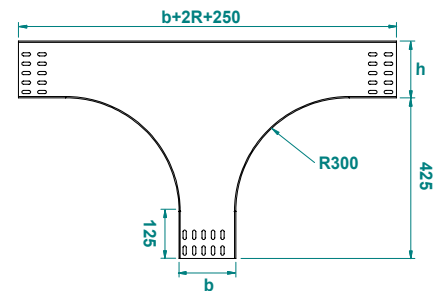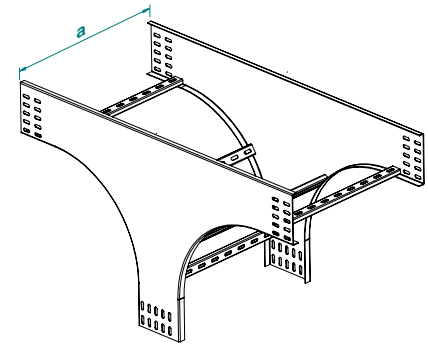

MMTR4 H150 HDG

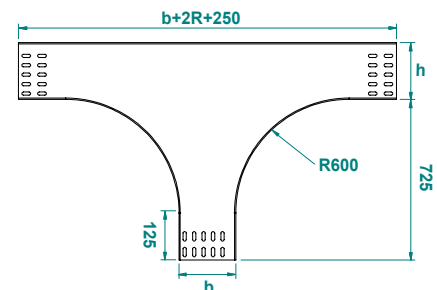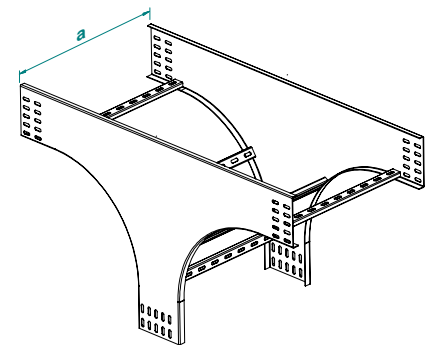

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method
to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0

Middle Reducer Connection (set)

Parçalı Redüksiyon (Orta) - Редукционные планки, симметричные



To install cable ladder bends use screw sets
CFS M6 or CFS M8


Hot-Dip Galvanized

RO... H150				1.5mm	
CODE	Reduction a mm	kg 1 set	pcs		
RO 1505 15 HDG	50	0.62	1		
RO 1510 15 HDG	100	0.71	1		
RO 1515 15 HDG	150	0.80	1		
RO 1520 15 HDG	200	0.89	1		
RO 1525 15 HDG	250	0.98	1		
RO 1530 15 HDG	300	1.06	1		
RO 1535 15 HDG	350	1.15	1		
RO 1540 15 HDG	400	1.24	1		
RO 1545 15 HDG	450	1.33	1		
RO 1550 15 HDG	500	1.42	1		
RO 1555 15 HDG	550	1.51	1		
RO 1560 15 HDG	600	1.59	1		
RO 1565 15 HDG	650	1.68	1		
RO 1570 15 HDG	700	1.77	1		
RO 1575 15 HDG	750	1.86	1		
RO 1580 15 HDG	800	1.95	1		
RO 1590 15 HDG	900	2.12	1		

RO... H150				2.0mm	
CODE	Reduction a mm	kg 1 set	pcs		
RO 1505 20 HDG	50	0.83	1		
RO 1510 20 HDG	100	0.95	1		
RO 1515 20 HDG	150	1.06	1		
RO 1520 20 HDG	200	1.18	1		
RO 1525 20 HDG	250	1.30	1		
RO 1530 20 HDG	300	1.42	1		
RO 1535 20 HDG	350	1.54	1		
RO 1540 20 HDG	400	1.65	1		
RO 1545 20 HDG	450	1.77	1		
RO 1550 20 HDG	500	1.89	1		
RO 1555 20 HDG	550	2.01	1		
RO 1560 20 HDG	600	2.12	1		
RO 1565 20 HDG	650	2.24	1		
RO 1570 20 HDG	700	2.36	1		
RO 1575 20 HDG	750	2.48	1		
RO 1580 20 HDG	800	2.60	1		
RO 1590 20 HDG	900	2.83	1		

Stop End (Blind End)

Sonlandırma - Заргнүшка

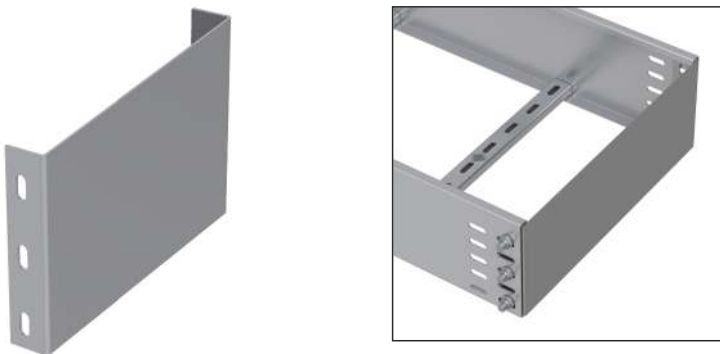



To install cable ladder bends use screw sets
CFS M6 or CFS M8

Hot-Dip Galvanized



SON... H150				1.5mm	
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
SON 1510 15 HDG	100	600	0.39	1	
SON 1515 15 HDG	150	600	0.48	1	
SON 1520 15 HDG	200	600	0.57	1	
SON 1525 15 HDG	250	600	0.66	1	
SON 1530 15 HDG	300	600	0.75	1	
SON 1540 15 HDG	400	600	0.92	1	
SON 1545 15 HDG	450	600	1.01	1	
SON 1550 15 HDG	500	600	1.10	1	
SON 1560 15 HDG	600	600	1.28	1	
SON 1570 15 HDG	700	600	1.45	1	
SON 1575 15 HDG	750	600	1.54	1	
SON 1580 15 HDG	800	600	1.63	1	
SON 1590 15 HDG	900	600	1.81	1	
SON 1500 15 HDG	1000	600	1.98	1	
SON 1502 15 HDG	1200	600	2.34	1	

SON... H150				2.0mm	
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
SON 1510 20 HDG	100	600	0.52	1	
SON 1515 20 HDG	150	600	0.64	1	
SON 1520 20 HDG	200	600	0.76	1	
SON 1525 20 HDG	250	600	0.88	1	
SON 1530 20 HDG	300	600	0.99	1	
SON 1540 20 HDG	400	600	1.23	1	
SON 1545 20 HDG	450	600	1.35	1	
SON 1550 20 HDG	500	600	1.47	1	
SON 1560 20 HDG	600	600	1.70	1	
SON 1570 20 HDG	700	600	1.94	1	
SON 1575 20 HDG	750	600	2.05	1	
SON 1580 20 HDG	800	600	2.17	1	
SON 1590 20 HDG	900	600	2.41	1	
SON 1500 20 HDG	1000	600	2.64	1	
SON 1502 20 HDG	1200	600	3.11	1	

RO H150 HDG

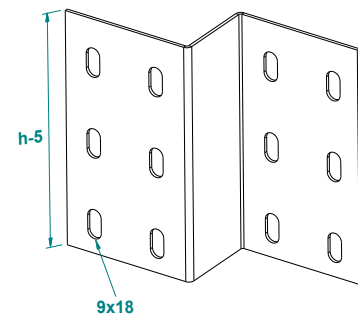

SON H150 HDG

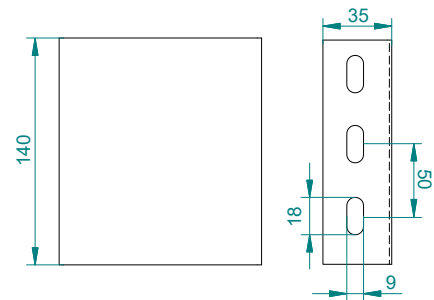

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method

to TS-EN 10346:2011 (PG)


SS- stainless steel AISI 304L and AISI 316L (SS)

EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0

Left Reducer Connection (set)

Parçalı Redüksiyon (Sol) - Редукционные планки, левосторонние

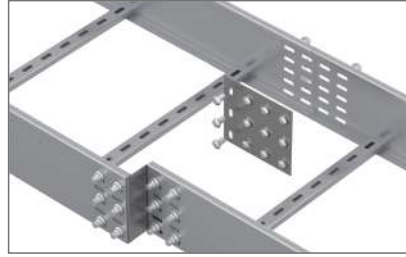

Hot-Dip Galvanized


To install cable ladder bends use screw sets
CFS M6 or CFS M8

RL... H150		1.5mm	
CODE	Reduction a mm	KG 1 set	pcs
RL 1505 15 HDG	50	0.62	1
RL 1510 15 HDG	100	0.71	1
RL 1515 15 HDG	150	0.80	1
RL 1520 15 HDG	200	0.89	1
RL 1525 15 HDG	250	0.98	1
RL 1530 15 HDG	300	1.06	1
RL 1535 15 HDG	350	1.15	1
RL 1540 15 HDG	400	1.24	1
RL 1545 15 HDG	450	1.33	1
RL 1550 15 HDG	500	1.42	1
RL 1555 15 HDG	550	1.51	1
RL 1560 15 HDG	600	1.59	1
RL 1565 15 HDG	650	1.68	1
RL 1570 15 HDG	700	1.77	1
RL 1575 15 HDG	750	1.86	1
RL 1580 15 HDG	800	1.95	1
RL 1590 15 HDG	900	2.12	1

RL... H150		2.0mm	
CODE	Reduction a mm	KG 1 set	pcs
RL 1505 20 HDG	50	0.83	1
RL 1510 20 HDG	100	0.95	1
RL 1515 20 HDG	150	1.06	1
RL 1520 20 HDG	200	1.18	1
RL 1525 20 HDG	250	1.30	1
RL 1530 20 HDG	300	1.42	1
RL 1535 20 HDG	350	1.54	1
RL 1540 20 HDG	400	1.65	1
RL 1545 20 HDG	450	1.77	1
RL 1550 20 HDG	500	1.89	1
RL 1555 20 HDG	550	2.01	1
RL 1560 20 HDG	600	2.12	1
RL 1565 20 HDG	650	2.24	1
RL 1570 20 HDG	700	2.36	1
RL 1575 20 HDG	750	2.48	1
RL 1580 20 HDG	800	2.60	1
RL 1590 20 HDG	900	2.83	1

Right Reducer Connection (set)

Parçalı Redüksiyon (Sağ) - Редукционные планки, правосторонние

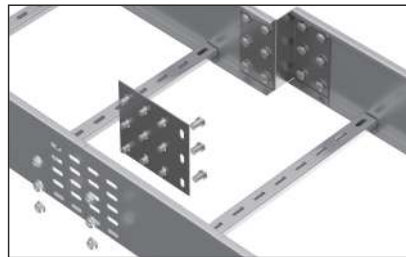



Hot-Dip Galvanized

To install cable ladder bends use screw sets
CFS M6 or CFS M8



RG... H150		1.5mm	
CODE	Reduction a mm	KG 1 set	pcs
RG 1505 15 HDG	50	0.62	1
RG 1510 15 HDG	100	0.71	1
RG 1515 15 HDG	150	0.80	1
RG 1520 15 HDG	200	0.89	1
RG 1525 15 HDG	250	0.98	1
RG 1530 15 HDG	300	1.06	1
RG 1535 15 HDG	350	1.15	1
RG 1540 15 HDG	400	1.24	1
RG 1545 15 HDG	450	1.33	1
RG 1550 15 HDG	500	1.42	1
RG 1555 15 HDG	550	1.51	1
RG 1560 15 HDG	600	1.59	1
RG 1565 15 HDG	650	1.68	1
RG 1570 15 HDG	700	1.77	1
RG 1575 15 HDG	750	1.86	1
RG 1580 15 HDG	800	1.95	1
RG 1590 15 HDG	900	2.12	1

RG... H150		2.0mm	
CODE	Reduction a mm	KG 1 set	pcs
RG 1505 20 HDG	50	0.83	1
RG 1510 20 HDG	100	0.95	1
RG 1515 20 HDG	150	1.06	1
RG 1520 20 HDG	200	1.18	1
RG 1525 20 HDG	250	1.30	1
RG 1530 20 HDG	300	1.42	1
RG 1535 20 HDG	350	1.54	1
RG 1540 20 HDG	400	1.65	1
RG 1545 20 HDG	450	1.77	1
RG 1550 20 HDG	500	1.89	1
RG 1555 20 HDG	550	2.01	1
RG 1560 20 HDG	600	2.12	1
RG 1565 20 HDG	650	2.24	1
RG 1570 20 HDG	700	2.36	1
RG 1575 20 HDG	750	2.48	1
RG 1580 20 HDG	800	2.60	1
RG 1590 20 HDG	900	2.83	1

RL H150 HDG

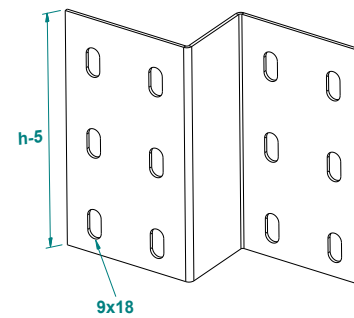

RG H150 HDG

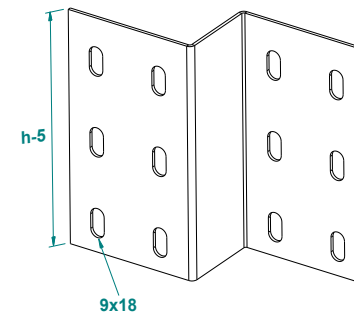

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method

to TS-EN 10346:2011 (PG)


SS- stainless steel AISI 304L and AISI 316L (SS)

EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0

Adjustable Vertical Connector

Dikey Seviye Degistirme Eki - Шарнирный соединитель

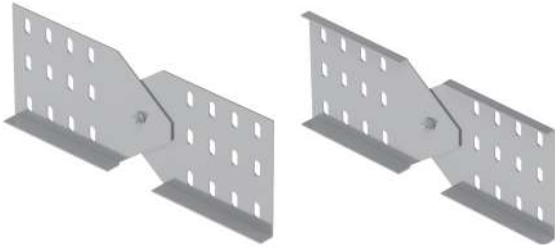

BDD 215

BDD 315

Hot-Dip Galvanized


BDD 2 ... H150		1.5mm		
CODE	Length L mm	KG ad/pc	KG 1m	pcs
BDD 215 15 HDG	250	0.63	1	
		2.0mm		
BDD 215 20 HDG	250	0.83	1	
		2.5mm		
BDD 215 25 HDG	250	1.04	1	

To install cable ladder bends use screw sets
CFS M6 or CFS M8

BDD 3 ... H150		1.5mm		
CODE	Length L mm	KG ad/pc	KG 1m	pcs
BDD 315 15 HDG	250	0.66	1	
		2.0mm		
BDD 315 20 HDG	250	0.88	1	
		2.5mm		
BDD 315 25 HDG	250	1.10	1	

Adjustable Horizontal Connector - Long Type

Yatay seviye degistirme eki - Uzun - Угловой соединитель - длинный

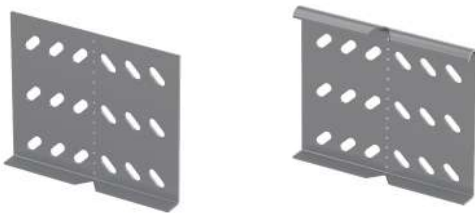

BYD 215

BYD 315

Pre - Galvanized

BYD 2 ... H150		1.5mm		
CODE	Length L mm	KG ad/pc	KG 1m	pcs
BYD 215 15 HDG	175	0.35	1	
		2.0mm		
BYD 215 20 HDG	175	0.46	1	
		2.5mm		
BYD 215 25 HDG	175	0.57	1	

To install cable ladder bends use screw sets
CFS M6 or CFS M8

BYD 3 ... H150		1.5mm		
CODE	Length L mm	KG ad/pc	KG 1m	pcs
BYD 315 15 HDG	175	0.37	1	
		2.0mm		
BYD 315 20 HDG	175	0.49	1	
		2.5mm		
BYD 315 25 HDG	175	0.61	1	

Seperator

Seperator - Перегородка



SEP 1 H135


SEP 2 H135

Pre - Galvanized

SEP 1 ... H135		1.0mm		
CODE	Height H mm	Length L mm	KG ad/pc	KG 1m
SEP 113 10 HDG	135	3000	1.22	1
		1.5mm		
SEP 113 15 HDG	135	3000	1.83	1
		2.0mm		
SEP 113 20 HDG	135	3000	2.44	1


To install cable ladder bends use screw sets
CFS M6 or CFS M8

SEP 2 ... H135		1.0mm		
CODE	Height H mm	Length L mm	KG ad/pc	KG 1m
SEP 213 10 HDG	135	3000	1.30	1
		1.5mm		
SEP 213 15 HDG	135	3000	1.95	1
		2.0mm		
SEP 213 20 HDG	135	3000	2.60	1

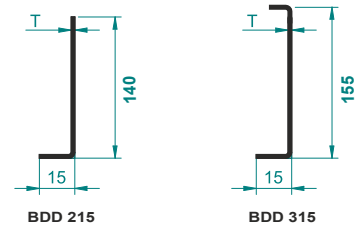


BDD 215

BDD 315




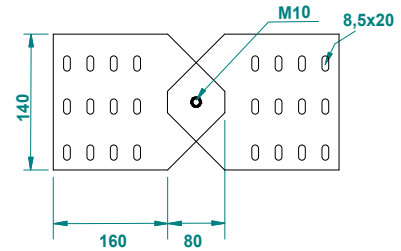


BYD H150 HDG



SEP 1 H135 HDG

SEP 2 H135 HDG

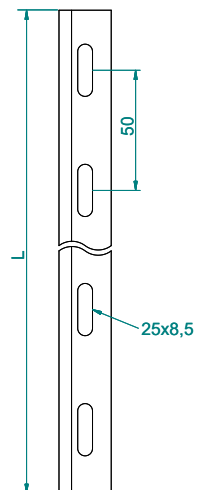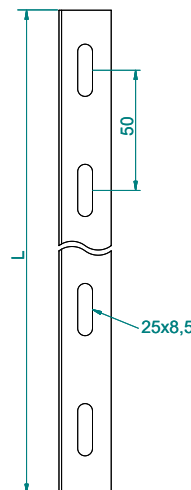

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method

to TS-EN 10346:2011 (PG)

SS- stainless steel AISI 304L and AISI 316L (SS)

EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0