

Cable Ladder Systems of Side Height 60



MTK
MADE IN TURKEY

Cable Ladder

Kablo Merdiveni SKM Serisi - Кабельросты



Important!

Joining cable ladder sections together only through the use of couplers 2 pcs for 1 length To install cable ladder-straight use Screw sets CFS M6 or CFS M8


Hot-Dip Galvanized

SKM ... H60		1.5mm	
CODE	Width a mm	Length L mm	kg ad/pc
SKM 610 15 HDG	100	3000	2.52
SKM 615 15 HDG	150	3000	2.65
SKM 620 15 HDG	200	3000	2.79
SKM 625 15 HDG	250	3000	2.93
SKM 630 15 HDG	300	3000	3.07
SKM 640 15 HDG	400	3000	3.34
SKM 645 15 HDG	450	3000	3.48
SKM 650 15 HDG	500	3000	3.62
SKM 660 15 HDG	600	3000	3.89
SKM 670 15 HDG	700	3000	4.17
SKM 675 15 HDG	750	3000	4.30
SKM 680 15 HDG	800	3000	4.44
SKM 690 15 HDG	900	3000	4.71
SKM 600 15 HDG	1000	3000	4.99
SKM 602 15 HDG	1200	3000	5.54

SKM ... H60		2.0mm	
CODE	Width a mm	Length L mm	kg ad/pc
SKM 610 20 HDG	100	3000	3.35
SKM 615 20 HDG	150	3000	3.54
SKM 620 20 HDG	200	3000	3.72
SKM 625 20 HDG	250	3000	3.90
SKM 630 20 HDG	300	3000	4.09
SKM 640 20 HDG	400	3000	4.45
SKM 645 20 HDG	450	3000	4.64
SKM 650 20 HDG	500	3000	4.82
SKM 660 20 HDG	600	3000	5.19
SKM 670 20 HDG	700	3000	5.55
SKM 675 20 HDG	750	3000	5.74
SKM 680 20 HDG	800	3000	5.92
SKM 690 20 HDG	900	3000	6.28
SKM 600 20 HDG	1000	3000	6.65
SKM 602 20 HDG	1200	3000	7.38

Fixing Unit for Cable Ladder

Merdiveni Sabitleme Elemanı - Фиксатор кабельроста, боковой



Hot-Dip Galvanized

MT/1		3.0mm	
CODE	Size h mm	Thickness T mm	kg ad/pc
MT/1 HDG	35x50	3,0	0,040

Stainless Steel - SS 304

MT/1		2.5mm	
CODE	Size h mm	Thickness T mm	kg ad/pc
MT/1 S4	35x50	2,5	0,032

Straight Connector (Coupler)

Birleştirme Elemanı - Прямой соединитель



KBE 260



KBE 360

Hot-Dip Galvanized

KBE 2 ... H60		1.5mm	
CODE	Height h mm	Length L mm	kg ad/pc
KBE 260 15 HDG	50	175	0.16
		2.0mm	
KBE 260 20 HDG	50	175	0.21
		2.5mm	
KBE 260 25 HDG	50	175	0.26

To install one length; use 2 pieces of KBE connector 8 sets of CFS bolts and nuts. (M6 or M8)



KBE 3 ... H60		1.5mm	
CODE	Height h mm	Length L mm	kg ad/pc
KBE 360 15 HDG	65	175	0.18
		2.0mm	
KBE 360 20 HDG	65	175	0.24
		2.5mm	
KBE 360 25 HDG	65	175	0.30

Dacromet

CFS		M6	
CODE	Size mm	Length mm	kg ad/pc
CFS M6 HDG	M6	15	0,008


CFS		M8	
CODE	Size mm	Length mm	kg ad/pc
CFS M8 HDG	M8	15	0,014

SKM H60 HDG

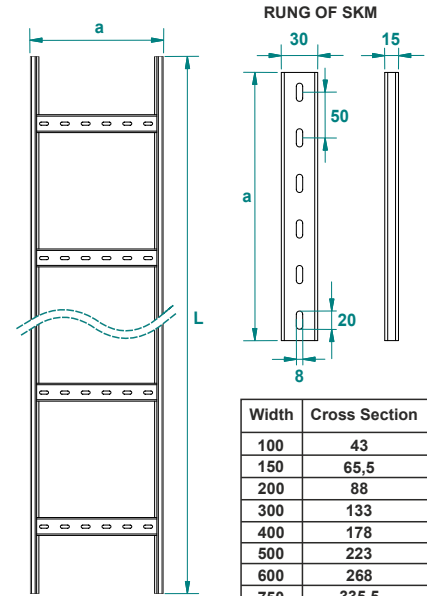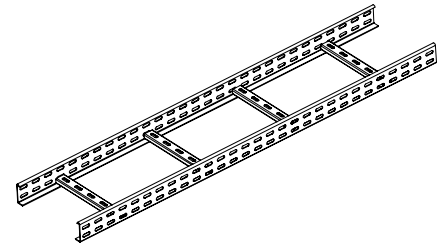


Width	Cross Section
100	43
150	65,5
200	88
300	133
400	178
500	223
600	268
750	335,5
900	403
1000	448
1200	538

MT/1




KBE 2 H60 HDG




KBE 260

KBE 360

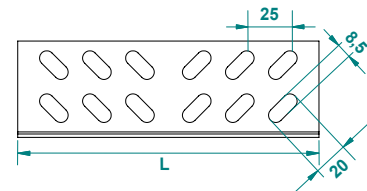

CFS

Round head square neck bolt & Flanged nut



APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method

SS- stainless steel AISI 304L and AISI 316L (SS)

EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0

Cable Ladder Systems of Side Height 60



MTK
MADE IN TURKEY

Cable Ladder

Kablo Merdiveni UKM Serisi - Кабельлорсты



Important!

Joining cable ladder sections together only through the use of couplers 2 pcs for 1 length To install cable ladder-straight use Screw sets CFS M6 or CFS M8

Hot-Dip Galvanized

UKM ... H60				1.5mm	
CODE	Width a mm	Length L mm	kg 1m	pcs	
UKM 610 15 HDG	100	3000	2.78	2	
UKM 615 15 HDG	150	3000	2.94	2	
UKM 620 15 HDG	200	3000	3.09	2	
UKM 625 15 HDG	250	3000	3.24	2	
UKM 630 15 HDG	300	3000	3.40	2	
UKM 640 15 HDG	400	3000	3.70	2	
UKM 645 15 HDG	450	3000	3.86	2	
UKM 650 15 HDG	500	3000	4.01	2	
UKM 660 15 HDG	600	3000	4.31	2	
UKM 670 15 HDG	700	3000	4.62	2	
UKM 675 15 HDG	750	3000	4.77	2	
UKM 680 15 HDG	800	3000	4.93	2	
UKM 690 15 HDG	900	3000	5.23	2	
UKM 600 15 HDG	1000	3000	5.54	2	
UKM 602 15 HDG	1200	3000	6.15	2	

UKM ... H60				2.5mm	
CODE	Width a mm	Length L mm	kg 1m	pcs	
UKM 610 25 HDG	100	3000	4.64	2	
UKM 615 25 HDG	150	3000	4.89	2	
UKM 620 25 HDG	200	3000	5.15	2	
UKM 625 25 HDG	250	3000	5.40	2	
UKM 630 25 HDG	300	3000	5.66	2	
UKM 640 25 HDG	400	3000	6.17	2	
UKM 645 25 HDG	450	3000	6.42	2	
UKM 650 25 HDG	500	3000	6.68	2	
UKM 660 25 HDG	600	3000	7.19	2	
UKM 670 25 HDG	700	3000	7.70	2	
UKM 675 25 HDG	750	3000	7.95	2	
UKM 680 25 HDG	800	3000	8.21	2	
UKM 690 25 HDG	900	3000	8.72	2	
UKM 600 25 HDG	1000	3000	9.23	2	
UKM 602 25 HDG	1200	3000	10.25	2	

UKM ... H60				2.0mm	
CODE	Width a mm	Length L mm	kg 1m	pcs	
UKM 610 20 HDG	100	3000	3.71	2	
UKM 615 20 HDG	150	3000	3.91	2	
UKM 620 20 HDG	200	3000	4.12	2	
UKM 625 20 HDG	250	3000	4.32	2	
UKM 630 20 HDG	300	3000	4.53	2	
UKM 640 20 HDG	400	3000	4.93	2	
UKM 645 20 HDG	450	3000	5.14	2	
UKM 650 20 HDG	500	3000	5.34	2	
UKM 660 20 HDG	600	3000	5.75	2	
UKM 670 20 HDG	700	3000	6.16	2	
UKM 675 20 HDG	750	3000	6.36	2	
UKM 680 20 HDG	800	3000	6.57	2	
UKM 690 20 HDG	900	3000	6.98	2	
UKM 600 20 HDG	1000	3000	7.38	2	
UKM 602 20 HDG	1200	3000	8.20	2	

UKM ... H60				3.0mm	
CODE	Width a mm	Length L mm	kg 1m	pcs	
UKM 610 30 HDG	100	3000	5.56	2	
UKM 615 30 HDG	150	3000	5.87	2	
UKM 620 30 HDG	200	3000	6.18	2	
UKM 625 30 HDG	250	3000	6.48	2	
UKM 630 30 HDG	300	3000	6.79	2	
UKM 640 30 HDG	400	3000	7.40	2	
UKM 645 30 HDG	450	3000	7.71	2	
UKM 650 30 HDG	500	3000	8.01	2	
UKM 660 30 HDG	600	3000	8.62	2	
UKM 670 30 HDG	700	3000	9.24	2	
UKM 675 30 HDG	750	3000	9.54	2	
UKM 680 30 HDG	800	3000	9.85	2	
UKM 690 30 HDG	900	3000	10.46	2	
UKM 600 30 HDG	1000	3000	11.07	2	
UKM 602 30 HDG	1200	3000	12.30	2	

Fixing Unit for Cable Ladder



Merdiveni Sabitleme Elemanı - Фиксатор кабельлорста, боковой



Hot-Dip Galvanized


MT/2 ... H60				1.5mm	
CODE	Height h mm	Fixing Hole D mm	kg 1m	pcs	
MT/2 60 HDG	65	11	0.09	100	

UKM H60 HDG (L3000)

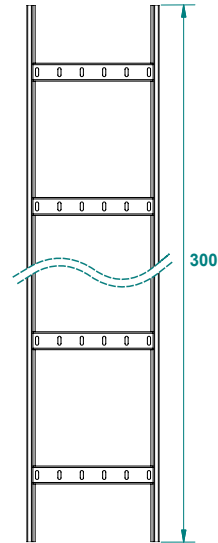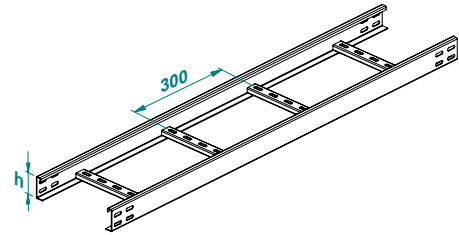


Width	Cross Section
100	43
150	65,5
200	88
300	133
400	178
500	223
600	268
750	335,5
900	403
1000	448
1200	538

RUNG OF UKM

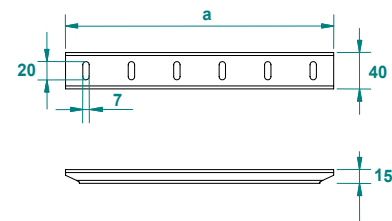

MT/2

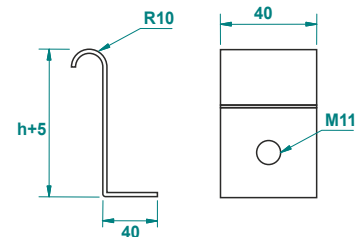

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: **1.5 2.0**

Cable Ladder Systems of Side Height 60



MTK
MADE IN TURKEY

Cable Ladder

Kablo Merdiveni UKM Serisi - Кабельлорсты



Important!

Joining cable ladder sections together only through the use of couplers 2 pcs for 1 length To install cable ladder-straight use Screw sets CFS M6 or CFS M8


Hot-Dip Galvanized

UKM ... H60				1.5mm	
CODE	Width a mm	Length L mm	KG 1m	pcs	
UKM 610.60 15 HDG	100	6000	2.78	2	
UKM 615.60 15 HDG	150	6000	2.94	2	
UKM 620.60 15 HDG	200	6000	3.09	2	
UKM 625.60 15 HDG	250	6000	3.24	2	
UKM 630.60 15 HDG	300	6000	3.40	2	
UKM 640.60 15 HDG	400	6000	3.70	2	
UKM 645.60 15 HDG	450	6000	3.86	2	
UKM 650.60 15 HDG	500	6000	4.01	2	
UKM 660.60 15 HDG	600	6000	4.31	2	
UKM 670.60 15 HDG	700	6000	4.62	2	
UKM 675.60 15 HDG	750	6000	4.77	2	
UKM 680.60 15 HDG	800	6000	4.93	2	
UKM 690.60 15 HDG	900	6000	5.23	2	
UKM 600.60 15 HDG	1000	6000	5.54	2	
UKM 602.60 15 HDG	1200	6000	6.15	2	
				2.5mm	
CODE	Width a mm	Length L mm	KG 1m	pcs	
UKM 610.60 25 HDG	100	6000	4.64	2	
UKM 615.60 25 HDG	150	6000	4.89	2	
UKM 620.60 25 HDG	200	6000	5.15	2	
UKM 625.60 25 HDG	250	6000	5.40	2	
UKM 630.60 25 HDG	300	6000	5.66	2	
UKM 640.60 25 HDG	400	6000	6.17	2	
UKM 645.60 25 HDG	450	6000	6.42	2	
UKM 650.60 25 HDG	500	6000	6.68	2	
UKM 660.60 25 HDG	600	6000	7.19	2	
UKM 670.60 25 HDG	700	6000	7.70	2	
UKM 675.60 25 HDG	750	6000	7.95	2	
UKM 680.60 25 HDG	800	6000	8.21	2	
UKM 690.60 25 HDG	900	6000	8.72	2	
UKM 600.60 25 HDG	1000	6000	9.23	2	
UKM 602.60 25 HDG	1200	6000	10.25	2	

UKM ... H60				2.0mm	
CODE	Width a mm	Length L mm	KG 1m	pcs	
UKM 610.60 20 HDG	100	6000	3.71	2	
UKM 615.60 20 HDG	150	6000	3.91	2	
UKM 620.60 20 HDG	200	6000	4.12	2	
UKM 625.60 20 HDG	250	6000	4.32	2	
UKM 630.60 20 HDG	300	6000	4.53	2	
UKM 640.60 20 HDG	400	6000	4.93	2	
UKM 645.60 20 HDG	450	6000	5.14	2	
UKM 650.60 20 HDG	500	6000	5.34	2	
UKM 660.60 20 HDG	600	6000	5.75	2	
UKM 670.60 20 HDG	700	6000	6.16	2	
UKM 675.60 20 HDG	750	6000	6.36	2	
UKM 680.60 20 HDG	800	6000	6.57	2	
UKM 690.60 20 HDG	900	6000	6.98	2	
UKM 600.60 20 HDG	1000	6000	7.38	2	
UKM 602.60 20 HDG	1200	6000	8.20	2	
				3.0mm	
CODE	Width a mm	Length L mm	KG 1m	pcs	
UKM 610.60 30 HDG	100	6000	5.56	2	
UKM 615.60 30 HDG	150	6000	5.87	2	
UKM 620.60 30 HDG	200	6000	6.18	2	
UKM 625.60 30 HDG	250	6000	6.48	2	
UKM 630.60 30 HDG	300	6000	6.79	2	
UKM 640.60 30 HDG	400	6000	7.40	2	
UKM 645.60 30 HDG	450	6000	7.71	2	
UKM 650.60 30 HDG	500	6000	8.01	2	
UKM 660.60 30 HDG	600	6000	8.62	2	
UKM 670.60 30 HDG	700	6000	9.24	2	
UKM 675.60 30 HDG	750	6000	9.54	2	
UKM 680.60 30 HDG	800	6000	9.85	2	
UKM 690.60 30 HDG	900	6000	10.46	2	
UKM 600.60 30 HDG	1000	6000	11.07	2	
UKM 602.60 30 HDG	1200	6000	12.30	2	

Beam Fixing Unit For Cable Ladder (Set)


Merdiveni / Demire Sabitleme Elemanı (Takım)

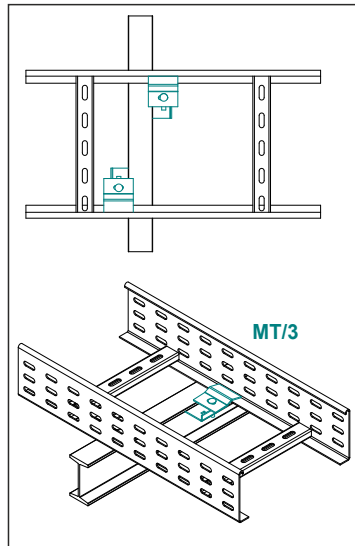


Stainless Steel - AISI 304L

MT/3				2.0mm	
CODE	Bolt Metric mm	Thickness T mm	KG ad/pc	pcs	
MT/3 S4	M6x30	2,0	0,12	100	

UKM H60 HDG (L6000)

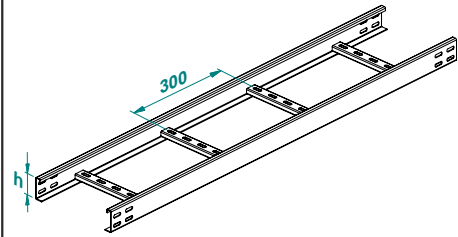


RUNG OF UKM

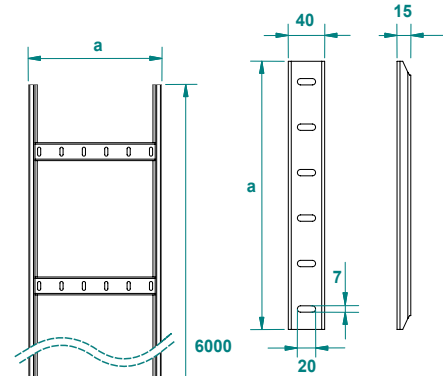

Width	Cross Section
100	83
150	125,5
200	168
300	253
400	338
500	423
600	508
750	635,5
900	763
1000	848
1200	1018

MT/3

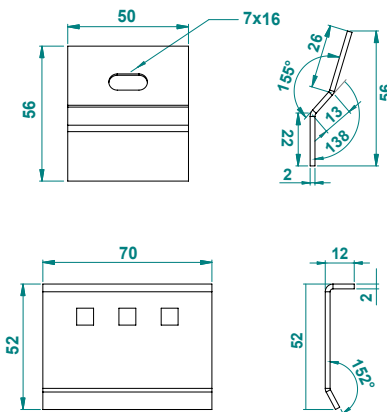

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0

90° Horizontal Bend of Cable Ladder

90° Merdiven Yatay Dönüş Elemanı - Угол кабельроста горизонтальный 90°



Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized

M90... H60		1.5mm			
CODE	Width a=b mm	Radius R mm	kg 1m	pcs	
M90 610 15 HDG	100	150	1.37	1	
M90 610 15 HDG	150	150	1.61	1	
M90 610 15 HDG	200	150	1.79	1	
M90 610 15 HDG	250	150	2.02	1	
M90 610 15 HDG	300	150	2.20	1	
M90 610 15 HDG	400	150	2.67	1	
M90 610 15 HDG	450	150	2.91	1	
M90 610 15 HDG	500	150	3.09	1	
M90 610 15 HDG	600	150	3.50	1	
M90 610 15 HDG	700	150	3.93	1	
M90 610 15 HDG	750	150	4.91	1	
M90 610 15 HDG	800	150	5.19	1	
M90 610 15 HDG	900	150	5.63	1	
M90 610 15 HDG	1000	150	7.09	1	
M90 610 15 HDG	1200	150	8.25	1	

M90... H60		2.0mm			
CODE	Width a=b mm	Radius R mm	kg 1m	pcs	
M90 610 20 HDG	100	150	1.83	1	
M90 610 20 HDG	150	150	2.14	1	
M90 610 20 HDG	200	150	2.38	1	
M90 610 20 HDG	250	150	2.69	1	
M90 610 20 HDG	300	150	2.93	1	
M90 610 20 HDG	400	150	3.56	1	
M90 610 20 HDG	450	150	3.88	1	
M90 610 20 HDG	500	150	4.11	1	
M90 610 20 HDG	600	150	4.67	1	
M90 610 20 HDG	700	150	5.24	1	
M90 610 20 HDG	750	150	6.54	1	
M90 610 20 HDG	800	150	6.91	1	
M90 610 20 HDG	900	150	7.50	1	
M90 610 20 HDG	1000	150	9.45	1	
M90 610 20 HDG	1200	150	10.99	1	

90° Horizontal Bend of Cable Ladder Radius:300

90° Merdiven Yatay Dönüş Elemanı R:300 - Угол кабельроста горизонтальный 90° радиус:300



Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized



M90R2... H60		1.5mm			
CODE	Width a=b mm	Radius R mm	kg pc	pcs	
M90R2 610 15 HDG	100	300	2.35	1	
M90R2 615 15 HDG	150	300	2.63	1	
M90R2 620 15 HDG	200	300	2.91	1	
M90R2 625 15 HDG	250	300	3.19	1	
M90R2 630 15 HDG	300	300	3.47	1	
M90R2 640 15 HDG	400	300	4.03	1	
M90R2 645 15 HDG	450	300	4.31	1	
M90R2 650 15 HDG	500	300	4.60	1	
M90R2 660 15 HDG	600	300	5.71	1	
M90R2 670 15 HDG	700	300	6.36	1	
M90R2 675 15 HDG	750	300	6.69	1	
M90R2 680 15 HDG	800	300	7.01	1	
M90R2 690 15 HDG	900	300	7.67	1	
M90R2 600 15 HDG	1000	300	9.24	1	
M90R2 602 15 HDG	1200	300	10.73	1	

M90R2... H60		2.0mm			
CODE	Width a=b mm	Radius R mm	kg 1m	pcs	
M90R2 610 20 HDG	100	300	3.13	1	
M90R2 615 20 HDG	150	300	3.51	1	
M90R2 620 20 HDG	200	300	3.88	1	
M90R2 625 20 HDG	250	300	4.25	1	
M90R2 630 20 HDG	300	300	4.63	1	
M90R2 640 20 HDG	400	300	5.38	1	
M90R2 645 20 HDG	450	300	5.75	1	
M90R2 650 20 HDG	500	300	6.13	1	
M90R2 660 20 HDG	600	300	7.61	1	
M90R2 670 20 HDG	700	300	8.48	1	
M90R2 675 20 HDG	750	300	8.92	1	
M90R2 680 20 HDG	800	300	9.35	1	
M90R2 690 20 HDG	900	300	10.22	1	
M90R2 600 20 HDG	1000	300	12.32	1	
M90R2 602 20 HDG	1200	300	14.31	1	

M90 H60 HDG

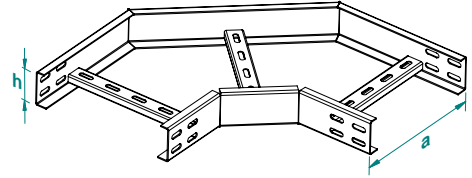

M90R2 H60 HDG

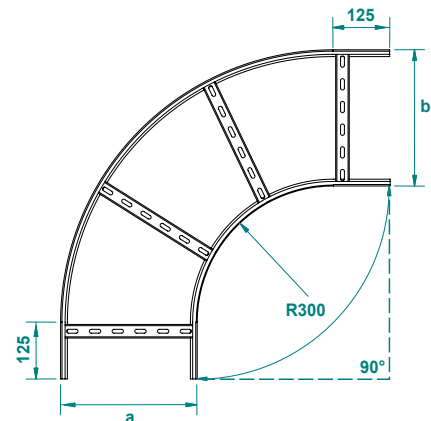

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method
to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0

Cable Ladder Systems of Side Height 60



MTK
MADE IN TURKEY

90° Horizontal Bend of Cable Ladder Radius:450

90° Merdiven Yatay Dönüş Elemanı R:450 - Угол кабельроста горизонтальный 90° радиус:450



Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized

M90R3... H60		1.5mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
M90R3 610 15 HDG	100	450	2.93	1	
M90R3 615 15 HDG	150	450	3.21	1	
M90R3 620 15 HDG	200	450	3.49	1	
M90R3 625 15 HDG	250	450	4.00	1	
M90R3 630 15 HDG	300	450	4.33	1	
M90R3 640 15 HDG	400	450	4.98	1	
M90R3 645 15 HDG	450	450	5.31	1	
M90R3 650 15 HDG	500	450	5.64	1	
M90R3 660 15 HDG	600	450	6.29	1	
M90R3 670 15 HDG	700	450	7.59	1	
M90R3 675 15 HDG	750	450	7.96	1	
M90R3 680 15 HDG	800	450	8.33	1	
M90R3 690 15 HDG	900	450	9.08	1	
M90R3 600 15 HDG	1000	450	9.82	1	
M90R3 602 15 HDG	1200	450	12.41	1	

M90R3... H60		2.0mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
M90R3 610 20 HDG	100	450	3.91	1	
M90R3 615 20 HDG	150	450	4.28	1	
M90R3 620 20 HDG	200	450	4.66	1	
M90R3 625 20 HDG	250	450	5.34	1	
M90R3 630 20 HDG	300	450	5.77	1	
M90R3 640 20 HDG	400	450	6.64	1	
M90R3 645 20 HDG	450	450	7.08	1	
M90R3 650 20 HDG	500	450	7.51	1	
M90R3 660 20 HDG	600	450	8.39	1	
M90R3 670 20 HDG	700	450	10.11	1	
M90R3 675 20 HDG	750	450	10.61	1	
M90R3 680 20 HDG	800	450	11.11	1	
M90R3 690 20 HDG	900	450	12.10	1	
M90R3 600 20 HDG	1000	450	13.09	1	
M90R3 602 20 HDG	1200	450	16.55	1	

90° Horizontal Bend of Cable Ladder Radius:600

90° Merdiven Yatay Dönüş Elemanı R:600 - Угол кабельроста горизонтальный 90° радиус:600



Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized



M90R4... H60		1.5mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
M90R4 610 15 HDG	100	600	3.61	1	
M90R4 615 15 HDG	150	600	3.93	1	
M90R4 620 15 HDG	200	600	4.26	1	
M90R4 625 15 HDG	250	600	4.59	1	
M90R4 630 15 HDG	300	600	4.91	1	
M90R4 640 15 HDG	400	600	5.93	1	
M90R4 645 15 HDG	450	600	6.31	1	
M90R4 650 15 HDG	500	600	6.68	1	
M90R4 660 15 HDG	600	600	7.42	1	
M90R4 670 15 HDG	700	600	8.17	1	
M90R4 675 15 HDG	750	600	9.23	1	
M90R4 680 15 HDG	800	600	9.65	1	
M90R4 690 15 HDG	900	600	10.49	1	
M90R4 600 15 HDG	1000	600	11.32	1	
M90R4 602 15 HDG	1200	600	14.10	1	

M90R4... H60		2.0mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
M90R4 610 20 HDG	100	600	4.81	1	
M90R4 615 20 HDG	150	600	5.24	1	
M90R4 620 20 HDG	200	600	5.68	1	
M90R4 625 20 HDG	250	600	6.11	1	
M90R4 630 20 HDG	300	600	6.55	1	
M90R4 640 20 HDG	400	600	7.91	1	
M90R4 645 20 HDG	450	600	8.41	1	
M90R4 650 20 HDG	500	600	8.90	1	
M90R4 660 20 HDG	600	600	9.90	1	
M90R4 670 20 HDG	700	600	10.89	1	
M90R4 675 20 HDG	750	600	12.31	1	
M90R4 680 20 HDG	800	600	12.86	1	
M90R4 690 20 HDG	900	600	13.98	1	
M90R4 600 20 HDG	1000	600	15.10	1	
M90R4 602 20 HDG	1200	600	18.80	1	

M90R3 H60 HDG

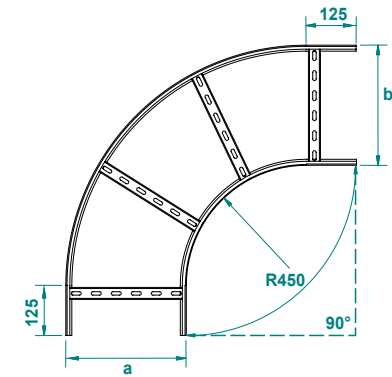

M90R4 H60 HDG

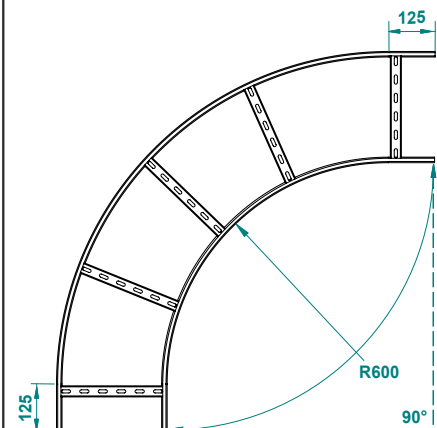

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method
to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0

Cable Ladder Systems of Side Height 60



MTK
MADE IN TURKEY

60° Horizontal Bend of Cable Ladder

60° Merdiven Yatay Dönüş Elemanı - Угол кабельроста горизонтальный 60°



Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized

M60... H60		1.5mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
M60 610 15 HDG	100	150	1.18	1	
M60 610 15 HDG	150	150	1.32	1	
M60 610 15 HDG	200	150	1.46	1	
M60 610 15 HDG	250	150	1.60	1	
M60 610 15 HDG	300	150	1.74	1	
M60 610 15 HDG	400	150	2.02	1	
M60 610 15 HDG	450	150	2.16	1	
M60 610 15 HDG	500	150	2.30	1	
M60 610 15 HDG	600	150	3.08	1	
M60 610 15 HDG	700	150	3.45	1	
M60 610 15 HDG	750	150	3.63	1	
M60 610 15 HDG	800	150	3.81	1	
M60 610 15 HDG	900	150	4.17	1	
M60 610 15 HDG	1000	150	5.53	1	
M60 610 15 HDG	1200	150	6.42	1	

M60... H60		2.0mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
M60 610 20 HDG	100	150	1.57	1	
M60 615 20 HDG	150	150	1.76	1	
M60 620 20 HDG	200	150	1.94	1	
M60 625 20 HDG	250	150	2.13	1	
M60 630 20 HDG	300	150	2.32	1	
M60 640 20 HDG	400	150	2.70	1	
M60 645 20 HDG	450	150	2.88	1	
M60 650 20 HDG	500	150	3.07	1	
M60 660 20 HDG	600	150	4.11	1	
M60 670 20 HDG	700	150	4.59	1	
M60 675 20 HDG	750	150	4.84	1	
M60 680 20 HDG	800	150	5.08	1	
M60 690 20 HDG	900	150	5.56	1	
M60 600 20 HDG	1000	150	7.37	1	
M60 602 20 HDG	1200	150	8.56	1	

60° Horizontal Bend of Cable Ladder Radius:300

60° Merdiven Yatay Dönüş Elemanı R:300 - Угол кабельроста горизонтальный 60° радиус:300



Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized



M60R2... H60		1.5mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
M60R2 610 15 HDG	100	300	1.80	1	
M60R2 610 15 HDG	150	300	2.01	1	
M60R2 610 15 HDG	200	300	2.21	1	
M60R2 610 15 HDG	250	300	2.41	1	
M60R2 610 15 HDG	300	300	2.61	1	
M60R2 610 15 HDG	400	300	3.02	1	
M60R2 610 15 HDG	450	300	3.22	1	
M60R2 610 15 HDG	500	300	3.42	1	
M60R2 610 15 HDG	600	300	4.38	1	
M60R2 610 15 HDG	700	300	4.88	1	
M60R2 610 15 HDG	750	300	5.13	1	
M60R2 610 15 HDG	800	300	5.37	1	
M60R2 610 15 HDG	900	300	5.87	1	
M60R2 610 15 HDG	1000	300	7.29	1	
M60R2 610 15 HDG	1200	300	8.46	1	

M60R2... H60		2.0mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
M60R2 610 20 HDG	100	300	2.40	1	
M60R2 615 20 HDG	150	300	2.67	1	
M60R2 620 20 HDG	200	300	2.94	1	
M60R2 625 20 HDG	250	300	3.21	1	
M60R2 630 20 HDG	300	300	3.48	1	
M60R2 640 20 HDG	400	300	4.02	1	
M60R2 645 20 HDG	450	300	4.29	1	
M60R2 650 20 HDG	500	300	4.56	1	
M60R2 660 20 HDG	600	300	5.84	1	
M60R2 670 20 HDG	700	300	6.50	1	
M60R2 675 20 HDG	750	300	6.83	1	
M60R2 680 20 HDG	800	300	7.16	1	
M60R2 690 20 HDG	900	300	7.83	1	
M60R2 600 20 HDG	1000	300	9.71	1	
M60R2 602 20 HDG	1200	300	11.28	1	

M60 H60 HDG

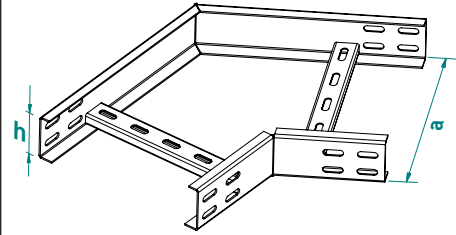

M60R2 H60 HDG

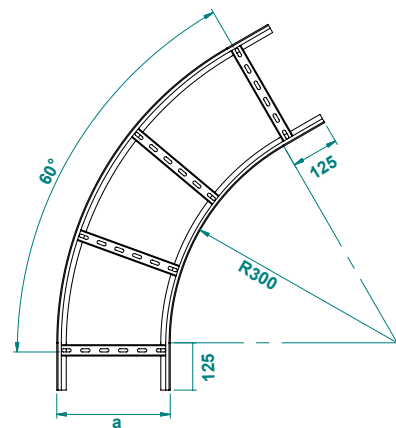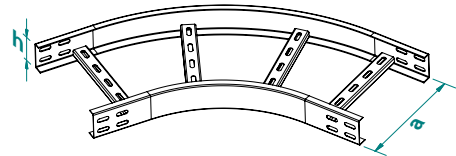

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method
to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0

Cable Ladder Systems of Side Height 60



MTK
MADE IN TURKEY

60° Horizontal Bend of Cable Ladder Radius:450

60° Merdiven Yatay Dönüş Elemanı R:450 - Угол кабельроста горизонтальный 60° радиус:450



Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized

M60R3... H60		1.5mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
M60R3 610 15 HDG	100	450	2.19	1	
M60R3 615 15 HDG	150	450	2.40	1	
M60R3 620 15 HDG	200	450	2.60	1	
M60R3 625 15 HDG	250	450	3.03	1	
M60R3 630 15 HDG	300	450	3.28	1	
M60R3 640 15 HDG	400	450	3.78	1	
M60R3 645 15 HDG	450	450	4.02	1	
M60R3 650 15 HDG	500	450	4.27	1	
M60R3 660 15 HDG	600	450	4.77	1	
M60R3 670 15 HDG	700	450	5.27	1	
M60R3 675 15 HDG	750	450	5.51	1	
M60R3 680 15 HDG	800	450	5.76	1	
M60R3 690 15 HDG	900	450	7.09	1	
M60R3 600 15 HDG	1000	450	7.67	1	
M60R3 602 15 HDG	1200	450	8.85	1	

M60R3... H60		2.0mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
M60R3 610 20 HDG	100	450	2.92	1	
M60R3 615 20 HDG	150	450	3.19	1	
M60R3 620 20 HDG	200	450	3.46	1	
M60R3 625 20 HDG	250	450	4.04	1	
M60R3 630 20 HDG	300	450	4.37	1	
M60R3 640 20 HDG	400	450	5.03	1	
M60R3 645 20 HDG	450	450	5.36	1	
M60R3 650 20 HDG	500	450	5.69	1	
M60R3 660 20 HDG	600	450	6.36	1	
M60R3 670 20 HDG	700	450	7.02	1	
M60R3 675 20 HDG	750	450	7.35	1	
M60R3 680 20 HDG	800	450	7.68	1	
M60R3 690 20 HDG	900	450	9.45	1	
M60R3 600 20 HDG	1000	450	10.23	1	
M60R3 602 20 HDG	1200	450	11.80	1	

60° Horizontal Bend of Cable Ladder Radius:600

60° Merdiven Yatay Dönüş Elemanı R:600 - Угол кабельроста горизонтальный 60° радиус:600



Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized



M60R4... H60		1.5mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
M60R4 610 15 HDG	100	600	2.67	1	
M60R4 615 15 HDG	150	600	2.92	1	
M60R4 620 15 HDG	200	600	3.17	1	
M60R4 625 15 HDG	250	600	3.42	1	
M60R4 630 15 HDG	300	600	3.67	1	
M60R4 640 15 HDG	400	600	4.16	1	
M60R4 645 15 HDG	450	600	4.41	1	
M60R4 650 15 HDG	500	600	4.66	1	
M60R4 660 15 HDG	600	600	5.71	1	
M60R4 670 15 HDG	700	600	6.30	1	
M60R4 675 15 HDG	750	600	6.59	1	
M60R4 680 15 HDG	800	600	6.89	1	
M60R4 690 15 HDG	900	600	7.47	1	
M60R4 600 15 HDG	1000	600	8.98	1	
M60R4 602 15 HDG	1200	600	10.34	1	

M60R4... H60		2.0mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
M60R4 610 20 HDG	100	600	3.56	1	
M60R4 615 20 HDG	150	600	3.89	1	
M60R4 620 20 HDG	200	600	4.22	1	
M60R4 625 20 HDG	250	600	4.56	1	
M60R4 630 20 HDG	300	600	4.89	1	
M60R4 640 20 HDG	400	600	5.55	1	
M60R4 645 20 HDG	450	600	5.88	1	
M60R4 650 20 HDG	500	600	6.21	1	
M60R4 660 20 HDG	600	600	7.61	1	
M60R4 670 20 HDG	700	600	8.39	1	
M60R4 675 20 HDG	750	600	8.79	1	
M60R4 680 20 HDG	800	600	9.18	1	
M60R4 690 20 HDG	900	600	9.96	1	
M60R4 600 20 HDG	1000	600	11.97	1	
M60R4 602 20 HDG	1200	600	13.79	1	

M60R3 H60 HDG

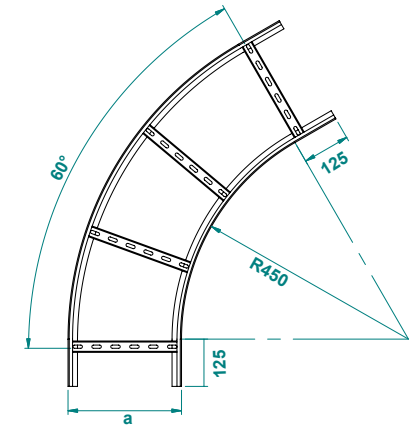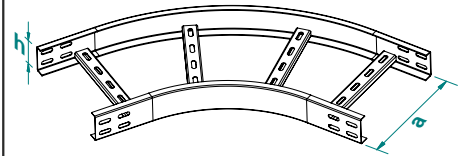

M60R4 H60 HDG

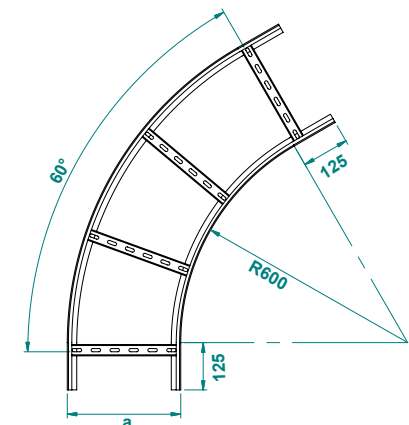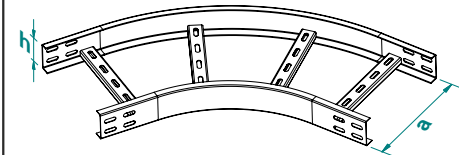

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method
to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0

45° Horizontal Bend of Cable Ladder

45° Merdiven Yatay Dönüş Elemanı - Угол кабельроста горизонтальный 45°



Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized

M45... H60		1.5mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
M45 610 15 HDG	100	150	0.86	1	
M45 615 15 HDG	150	150	1.00	1	
M45 620 15 HDG	200	150	1.13	1	
M45 625 15 HDG	250	150	1.26	1	
M45 630 15 HDG	300	150	1.38	1	
M45 640 15 HDG	400	150	1.64	1	
M45 645 15 HDG	450	150	1.78	1	
M45 650 15 HDG	500	150	1.90	1	
M45 660 15 HDG	600	150	2.22	1	
M45 670 15 HDG	700	150	2.43	1	
M45 675 15 HDG	750	150	2.58	1	
M45 680 15 HDG	800	150	2.71	1	
M45 690 15 HDG	900	150	2.94	1	
M45 600 15 HDG	1000	150	4.11	1	
M45 602 15 HDG	1200	150	4.78	1	

M45... H60		2.0mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
M45 610 20 HDG	100	150	1.15	1	
M45 615 20 HDG	150	150	1.33	1	
M45 620 20 HDG	200	150	1.50	1	
M45 625 20 HDG	250	150	1.67	1	
M45 630 20 HDG	300	150	1.84	1	
M45 640 20 HDG	400	150	2.18	1	
M45 645 20 HDG	450	150	2.37	1	
M45 650 20 HDG	500	150	2.54	1	
M45 660 20 HDG	600	150	2.96	1	
M45 670 20 HDG	700	150	3.24	1	
M45 675 20 HDG	750	150	3.44	1	
M45 680 20 HDG	800	150	3.61	1	
M45 690 20 HDG	900	150	3.92	1	
M45 600 20 HDG	1000	150	5.48	1	
M45 602 20 HDG	1200	150	6.38	1	

45° Horizontal Bend of Cable Ladder

45° Merdiven Yatay Dönüş Elemanı - Угол кабельроста горизонтальный 45°



Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized



M45R2... H60		1.5mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
M45R2 610 15 HDG	100	300	1.49	1	
M45R2 615 15 HDG	150	300	1.63	1	
M45R2 620 15 HDG	200	300	1.95	1	
M45R2 625 15 HDG	250	300	2.14	1	
M45R2 630 15 HDG	300	300	2.32	1	
M45R2 640 15 HDG	400	300	2.70	1	
M45R2 645 15 HDG	450	300	2.88	1	
M45R2 650 15 HDG	500	300	3.07	1	
M45R2 660 15 HDG	600	300	3.44	1	
M45R2 670 15 HDG	700	300	3.81	1	
M45R2 675 15 HDG	750	300	4.00	1	
M45R2 680 15 HDG	800	300	4.19	1	
M45R2 690 15 HDG	900	300	4.56	1	
M45R2 600 15 HDG	1000	300	5.85	1	
M45R2 602 15 HDG	1200	300	6.78	1	

M45R2... H60		2.0mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
M45R2 610 20 HDG	100	300	1.98	1	
M45R2 615 20 HDG	150	300	2.17	1	
M45R2 620 20 HDG	200	300	2.60	1	
M45R2 625 20 HDG	250	300	2.85	1	
M45R2 630 20 HDG	300	300	3.10	1	
M45R2 640 20 HDG	400	300	3.59	1	
M45R2 645 20 HDG	450	300	3.84	1	
M45R2 650 20 HDG	500	300	4.09	1	
M45R2 660 20 HDG	600	300	4.59	1	
M45R2 670 20 HDG	700	300	5.08	1	
M45R2 675 20 HDG	750	300	5.33	1	
M45R2 680 20 HDG	800	300	5.58	1	
M45R2 690 20 HDG	900	300	6.08	1	
M45R2 600 20 HDG	1000	300	7.80	1	
M45R2 602 20 HDG	1200	300	9.04	1	

M45 H60 HDG

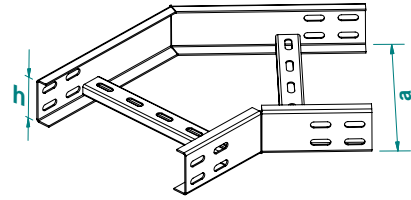

M45R2 H60 HDG

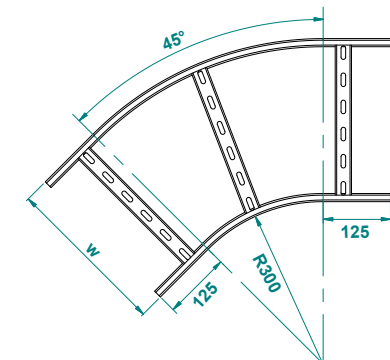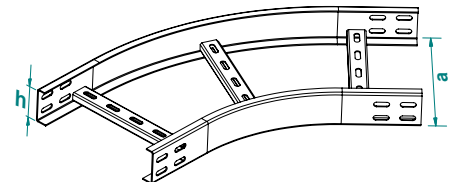

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0

Cable Ladder Systems of Side Height 60



MTK
MADE IN TURKEY

45° Horizontal Bend of Cable Ladder Radius:450

45° Merdiven Yatay Dönüş Elemanı R:450 - Угол кабельроста горизонтальный 45° радиус:450



Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized

M45R3... H60		1.5mm			
CODE	Width a=b mm	Radius R mm	KG 1pc	pcs	
M45R3 610 15 HDG	100	450	1.87	1	
M45R3 615 15 HDG	150	450	2.06	1	
M45R3 620 15 HDG	200	450	2.24	1	
M45R3 625 15 HDG	250	450	2.43	1	
M45R3 630 15 HDG	300	450	2.61	1	
M45R3 640 15 HDG	400	450	2.99	1	
M45R3 645 15 HDG	450	450	3.17	1	
M45R3 650 15 HDG	500	450	3.36	1	
M45R3 660 15 HDG	600	450	3.73	1	
M45R3 670 15 HDG	700	450	4.75	1	
M45R3 675 15 HDG	750	450	4.98	1	
M45R3 680 15 HDG	800	450	5.21	1	
M45R3 690 15 HDG	900	450	5.68	1	
M45R3 600 15 HDG	1000	450	6.14	1	
M45R3 602 15 HDG	1200	450	7.07	1	

M45R3... H60		2.0mm			
CODE	Width a=b mm	Radius R mm	KG 1pc	pcs	
M45R3 610 20 HDG	100	450	2.49	1	
M45R3 615 20 HDG	150	450	2.74	1	
M45R3 620 20 HDG	200	450	2.99	1	
M45R3 625 20 HDG	250	450	3.24	1	
M45R3 630 20 HDG	300	450	3.48	1	
M45R3 640 20 HDG	400	450	3.98	1	
M45R3 645 20 HDG	450	450	3.98	1	
M45R3 650 20 HDG	500	450	4.23	1	
M45R3 660 20 HDG	600	450	4.48	1	
M45R3 670 20 HDG	700	450	4.97	1	
M45R3 675 20 HDG	750	450	6.33	1	
M45R3 680 20 HDG	800	450	6.64	1	
M45R3 690 20 HDG	900	450	6.95	1	
M45R3 600 20 HDG	1000	450	7.57	1	
M45R3 602 20 HDG	1200	450	9.42	1	

45° Horizontal Bend of Cable Ladder Radius:600

45° Merdiven Yatay Dönüş Elemanı R:600 - Угол кабельроста горизонтальный 45° радиус:600



Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized



M45R4... H60		1.5mm			
CODE	Width a=b mm	Radius R mm	KG 1pc	pcs	
M45R4 610 15 HDG	100	600	2.16	1	
M45R4 615 15 HDG	150	600	2.35	1	
M45R4 620 15 HDG	200	600	2.53	1	
M45R4 625 15 HDG	250	600	2.72	1	
M45R4 630 15 HDG	300	600	2.91	1	
M45R4 640 15 HDG	400	600	3.65	1	
M45R4 645 15 HDG	450	600	3.88	1	
M45R4 650 15 HDG	500	600	4.11	1	
M45R4 660 15 HDG	600	600	4.57	1	
M45R4 670 15 HDG	700	600	5.04	1	
M45R4 675 15 HDG	750	600	5.27	1	
M45R4 680 15 HDG	800	600	5.50	1	
M45R4 690 15 HDG	900	600	5.97	1	
M45R4 600 15 HDG	1000	600	7.35	1	
M45R4 602 15 HDG	1200	600	8.46	1	

M45R4... H60		2.0mm			
CODE	Width a=b mm	Radius R mm	KG 1pc	pcs	
M45R4 610 20 HDG	100	600	2.88	1	
M45R4 615 20 HDG	150	600	3.13	1	
M45R4 620 20 HDG	200	600	3.38	1	
M45R4 625 20 HDG	250	600	3.62	1	
M45R4 630 20 HDG	300	600	3.87	1	
M45R4 640 20 HDG	400	600	4.86	1	
M45R4 645 20 HDG	450	600	5.17	1	
M45R4 650 20 HDG	500	600	5.48	1	
M45R4 660 20 HDG	600	600	6.10	1	
M45R4 670 20 HDG	700	600	6.72	1	
M45R4 675 20 HDG	750	600	7.03	1	
M45R4 680 20 HDG	800	600	7.34	1	
M45R4 690 20 HDG	900	600	7.96	1	
M45R4 600 20 HDG	1000	600	9.80	1	
M45R4 602 20 HDG	1200	600	11.28	1	

M45R3 H60 HDG

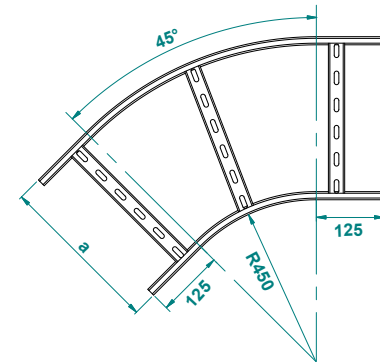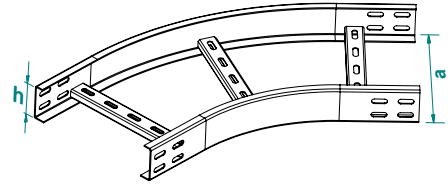

M45R4 H60 HDG

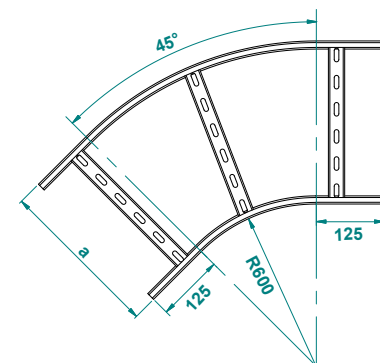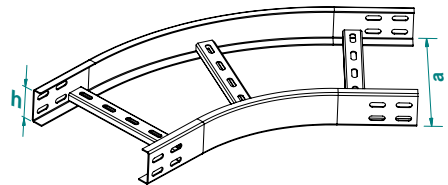

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0

Cable Ladder Systems of Side Height 60



MTK
MADE IN TURKEY

30° Horizontal Bend of Cable Ladder

30° Merdiven Yatay Dönüş Elemanı - Угол кабельроста горизонтальный 30°



Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized

M30... H60						M30... H60					
1.5mm						2.0mm					
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs		CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
M30 610 15 HDG	100	150	0.83	1		M30 610 20 HDG	100	150	1.10	1	
M30 615 15 HDG	150	150	0.95	1		M30 615 20 HDG	150	150	1.26	1	
M30 620 15 HDG	200	150	1.05	1		M30 620 20 HDG	200	150	1.40	1	
M30 625 15 HDG	250	150	1.17	1		M30 625 20 HDG	250	150	1.55	1	
M30 630 15 HDG	300	150	1.28	1		M30 630 20 HDG	300	150	1.71	1	
M30 640 15 HDG	400	150	1.50	1		M30 640 20 HDG	400	150	2.00	1	
M30 645 15 HDG	450	150	1.62	1		M30 645 20 HDG	450	150	2.16	1	
M30 650 15 HDG	500	150	1.72	1		M30 650 20 HDG	500	150	2.30	1	
M30 660 15 HDG	600	150	1.94	1		M30 660 20 HDG	600	150	2.59	1	
M30 670 15 HDG	700	150	2.18	1		M30 670 20 HDG	700	150	2.90	1	
M30 675 15 HDG	750	150	2.28	1		M30 675 20 HDG	750	150	3.04	1	
M30 680 15 HDG	800	150	2.40	1		M30 680 20 HDG	800	150	3.20	1	
M30 690 15 HDG	900	150	2.62	1		M30 690 20 HDG	900	150	3.49	1	
M30 600 15 HDG	1000	150	2.84	1		M30 600 20 HDG	1000	150	3.78	1	
M30 602 15 HDG	1200	150	3.29	1		M30 602 20 HDG	1200	150	4.39	1	

30° Horizontal Bend of Cable Ladder Radius:300

30° Merdiven Yatay Dönüş Elemanı R:300 - Угол кабельроста горизонтальный 30° радиус:300





Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8



Hot-Dip Galvanized

M30R2... H60						M30R2... H60					
1.5mm						2.0mm					
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs		CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
M30R2 610 15 HDG	100	300	1.26	1		M30R2 610 20 HDG	100	300	1.68	1	
M30R2 615 15 HDG	150	300	1.38	1		M30R2 615 20 HDG	150	300	1.84	1	
M30R2 620 15 HDG	200	300	1.51	1		M30R2 620 20 HDG	200	300	2.01	1	
M30R2 625 15 HDG	250	300	1.63	1		M30R2 625 20 HDG	250	300	2.17	1	
M30R2 630 15 HDG	300	300	1.76	1		M30R2 630 20 HDG	300	300	2.34	1	
M30R2 640 15 HDG	400	300	2.00	1		M30R2 640 20 HDG	400	300	2.67	1	
M30R2 645 15 HDG	450	300	2.13	1		M30R2 645 20 HDG	450	300	2.84	1	
M30R2 650 15 HDG	500	300	2.25	1		M30R2 650 20 HDG	500	300	3.00	1	
M30R2 660 15 HDG	600	300	3.05	1		M30R2 660 20 HDG	600	300	4.07	1	
M30R2 670 15 HDG	700	300	3.39	1		M30R2 670 20 HDG	700	300	4.52	1	
M30R2 675 15 HDG	750	300	3.56	1		M30R2 675 20 HDG	750	300	4.75	1	
M30R2 680 15 HDG	800	300	3.73	1		M30R2 680 20 HDG	800	300	4.98	1	
M30R2 690 15 HDG	900	300	4.07	1		M30R2 690 20 HDG	900	300	5.43	1	
M30R2 600 15 HDG	1000	300	4.41	1		M30R2 600 20 HDG	1000	300	5.88	1	
M30R2 602 15 HDG	1200	300	5.09	1		M30R2 602 20 HDG	1200	300	6.79	1	

M30 H60 HDG

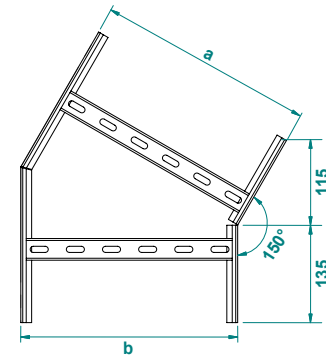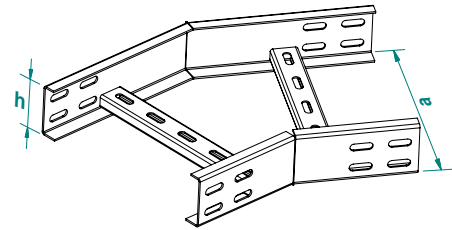

M30R2 H60 HDG

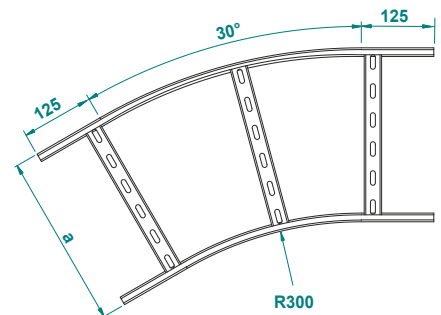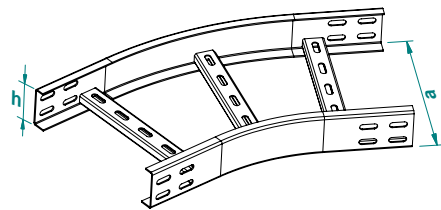

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method
to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0

Cable Ladder Systems of Side Height 60



MTK
MADE IN TURKEY

30° Horizontal Bend of Cable Ladder Radius:450

30° Merdiven Yatay Dönüş Elemanı R:450 - Угол кабельроста горизонтальный 30° радиус:450



Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized

M30R3... H60						M30R3... H60					
1.5mm						2.0mm					
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs		CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
M30R3 610 15 HDG	100	450	1.45	1		M30R3 610 20 HDG	100	450	1.94	1	
M30R3 615 15 HDG	150	450	1.58	1		M30R3 615 20 HDG	150	450	2.10	1	
M30R3 620 15 HDG	200	450	1.70	1		M30R3 620 20 HDG	200	450	2.27	1	
M30R3 625 15 HDG	250	450	2.06	1		M30R3 625 20 HDG	250	450	2.74	1	
M30R3 630 15 HDG	300	450	2.23	1		M30R3 630 20 HDG	300	450	2.97	1	
M30R3 640 15 HDG	400	450	2.57	1		M30R3 640 20 HDG	400	450	3.42	1	
M30R3 645 15 HDG	450	450	2.74	1		M30R3 645 20 HDG	450	450	3.65	1	
M30R3 650 15 HDG	500	450	2.91	1		M30R3 650 20 HDG	500	450	3.87	1	
M30R3 660 15 HDG	600	450	3.25	1		M30R3 660 20 HDG	600	450	4.33	1	
M30R3 670 15 HDG	700	450	3.59	1		M30R3 670 20 HDG	700	450	4.78	1	
M30R3 675 15 HDG	750	450	3.76	1		M30R3 675 20 HDG	750	450	5.01	1	
M30R3 680 15 HDG	800	450	3.93	1		M30R3 680 20 HDG	800	450	5.23	1	
M30R3 690 15 HDG	900	450	4.27	1		M30R3 690 20 HDG	900	450	5.69	1	
M30R3 600 15 HDG	1000	450	4.61	1		M30R3 600 20 HDG	1000	450	6.14	1	
M30R3 602 15 HDG	1200	450	5.29	1		M30R3 602 20 HDG	1200	450	7.05	1	

30° Horizontal Bend of Cable Ladder Radius:600

30° Merdiven Yatay Dönüş Elemanı R:600 - Угол кабельроста горизонтальный 30° радиус:600





Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8



Hot-Dip Galvanized

M30R4... H60						M30R4... H60					
1.5mm						2.0mm					
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs		CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
M30R4 610 15 HDG	100	600	1.74	1		M30R4 610 20 HDG	100	600	2.32	1	
M30R4 615 15 HDG	150	600	1.91	1		M30R4 615 20 HDG	150	600	2.54	1	
M30R4 620 15 HDG	200	600	2.08	1		M30R4 620 20 HDG	200	600	2.77	1	
M30R4 625 15 HDG	250	600	2.25	1		M30R4 625 20 HDG	250	600	3.00	1	
M30R4 630 15 HDG	300	600	2.42	1		M30R4 630 20 HDG	300	600	3.23	1	
M30R4 640 15 HDG	400	600	2.76	1		M30R4 640 20 HDG	400	600	3.68	1	
M30R4 645 15 HDG	450	600	2.93	1		M30R4 645 20 HDG	450	600	3.91	1	
M30R4 650 15 HDG	500	600	3.10	1		M30R4 650 20 HDG	500	600	4.13	1	
M30R4 660 15 HDG	600	600	3.44	1		M30R4 660 20 HDG	600	600	4.59	1	
M30R4 670 15 HDG	700	600	3.78	1		M30R4 670 20 HDG	700	600	5.04	1	
M30R4 675 15 HDG	750	600	3.95	1		M30R4 675 20 HDG	750	600	5.27	1	
M30R4 680 15 HDG	800	600	4.12	1		M30R4 680 20 HDG	800	600	5.49	1	
M30R4 690 15 HDG	900	600	4.46	1		M30R4 690 20 HDG	900	600	5.95	1	
M30R4 600 15 HDG	1000	600	4.80	1		M30R4 600 20 HDG	1000	600	6.40	1	
M30R4 602 15 HDG	1200	600	6.58	1		M30R4 602 20 HDG	1200	600	8.78	1	

M30R3 H60 HDG

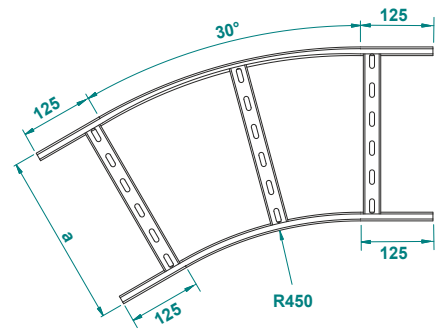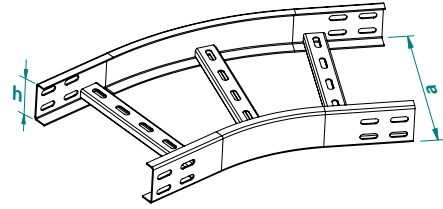

M30R4 H60 HDG

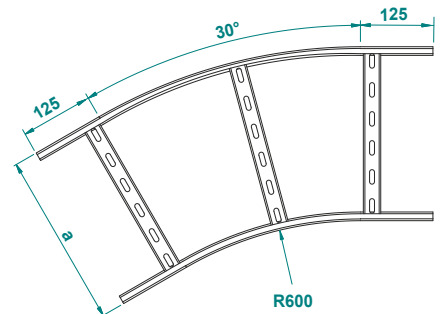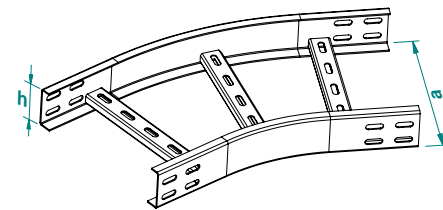

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method
to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0

Cable Ladder Systems of Side Height 60



MTK
MADE IN TURKEY

Tee Horizontal Bend of Cable Ladder

"T" Merdiven Yatay Dönüş Elemanı - T-отвод кабельроста горизонтальный



Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized

MT... H60		1.5mm			
CODE	Width a=b=c mm	Radius R mm	kg 1pc	pcs	
MT 610 15 HDG	100	150	1.76	1	
MT 615 15 HDG	150	150	1.94	1	
MT 620 15 HDG	200	150	2.12	1	
MT 625 15 HDG	250	150	2.84	1	
MT 630 15 HDG	300	150	3.10	1	
MT 640 15 HDG	400	150	3.62	1	
MT 645 15 HDG	450	150	3.88	1	
MT 650 15 HDG	500	150	4.15	1	
MT 660 15 HDG	600	150	4.67	1	
MT 670 15 HDG	700	150	5.85	1	
MT 675 15 HDG	750	150	6.16	1	
MT 680 15 HDG	800	150	6.46	1	
MT 690 15 HDG	900	150	7.07	1	
MT 600 15 HDG	1000	150	8.58	1	
MT 602 15 HDG	1200	150	10.04	1	

MT... H60		2.0mm			
CODE	Width a=b=c mm	Radius R mm	kg 1pc	pcs	
MT 610 20 HDG	100	150	2.35	1	
MT 615 20 HDG	150	150	2.59	1	
MT 620 20 HDG	200	150	2.83	1	
MT 625 20 HDG	250	150	3.78	1	
MT 630 20 HDG	300	150	4.13	1	
MT 640 20 HDG	400	150	4.83	1	
MT 645 20 HDG	450	150	5.18	1	
MT 650 20 HDG	500	150	5.53	1	
MT 660 20 HDG	600	150	6.23	1	
MT 670 20 HDG	700	150	7.80	1	
MT 675 20 HDG	750	150	8.21	1	
MT 680 20 HDG	800	150	8.61	1	
MT 690 20 HDG	900	150	9.42	1	
MT 600 20 HDG	1000	150	11.44	1	
MT 602 20 HDG	1200	150	13.39	1	

Tee Horizontal Bend of Cable Ladder Radius:300

"T" Merdiven Yatay Dönüş Elemanı R:300 - T-отвод кабельроста горизонтальный радиус:300



Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized



MTR2... H60		1.5mm			
CODE	Width a=b=c mm	Radius R mm	kg 1pc	pcs	
MTR2 610 15 HDG	100	300	3.98	1	
MTR2 615 15 HDG	150	300	4.41	1	
MTR2 620 15 HDG	200	300	4.84	1	
MTR2 625 15 HDG	250	300	5.04	1	
MTR2 630 15 HDG	300	300	5.38	1	
MTR2 640 15 HDG	400	300	6.10	1	
MTR2 645 15 HDG	450	300	6.44	1	
MTR2 650 15 HDG	500	300	6.77	1	
MTR2 660 15 HDG	600	300	8.18	1	
MTR2 670 15 HDG	700	300	9.04	1	
MTR2 675 15 HDG	750	300	9.42	1	
MTR2 680 15 HDG	800	300	9.81	1	
MTR2 690 15 HDG	900	300	10.57	1	
MTR2 600 15 HDG	1000	300	13.04	1	
MTR2 602 15 HDG	1200	300	14.76	1	

MTR2... H60		2.0mm			
CODE	Width a=b=c mm	Radius R mm	kg 1pc	pcs	
MTR2 610 20 HDG	100	300	5.31	1	
MTR2 615 20 HDG	150	300	5.88	1	
MTR2 620 20 HDG	200	300	6.45	1	
MTR2 625 20 HDG	250	300	6.72	1	
MTR2 630 20 HDG	300	300	7.17	1	
MTR2 640 20 HDG	400	300	8.13	1	
MTR2 645 20 HDG	450	300	8.58	1	
MTR2 650 20 HDG	500	300	9.03	1	
MTR2 660 20 HDG	600	300	10.91	1	
MTR2 670 20 HDG	700	300	12.05	1	
MTR2 675 20 HDG	750	300	12.56	1	
MTR2 680 20 HDG	800	300	13.08	1	
MTR2 690 20 HDG	900	300	14.10	1	
MTR2 600 20 HDG	1000	300	17.38	1	
MTR2 602 20 HDG	1200	300	19.67	1	

MT H60 HDG

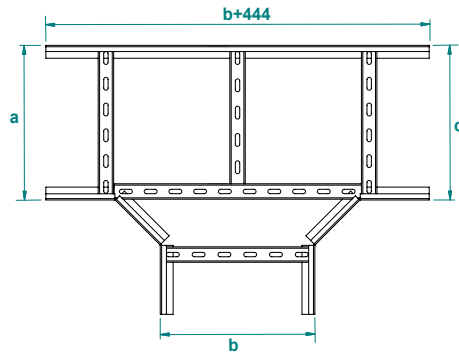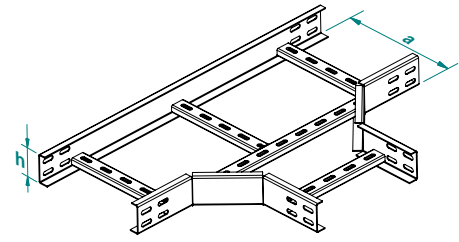

MTR2 H60 HDG

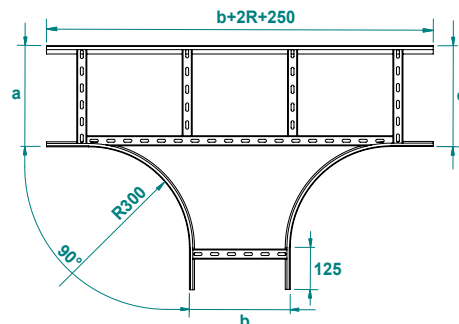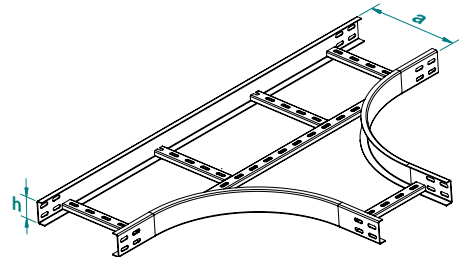

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method
to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0

Cable Ladder Systems of Side Height 60



MTK
MADE IN TURKEY

Tee Horizontal Bend of Cable Ladder Radius:450

"T" Merdiven Yatay Dönüş Elemanı R:450 - T-отвод кабельроста горизонтальный радиус:450



Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized

MTR3... H60					MTR3... H60				
1.5mm					2.0mm				
CODE	Width a=b=c mm	Radius R mm	kg 1pc	pcs	CODE	Width a=b=c mm	Radius R mm	kg 1pc	pcs
MTR3 610 15 HDG	100	450	5.12	1	MTR3 610 20 HDG	100	450	6.82	1
MTR3 615 15 HDG	150	450	5.46	1	MTR3 615 20 HDG	150	450	7.27	1
MTR3 620 15 HDG	200	450	6.30	1	MTR3 620 20 HDG	200	450	8.40	1
MTR3 625 15 HDG	250	450	7.32	1	MTR3 625 20 HDG	250	450	9.76	1
MTR3 630 15 HDG	300	450	7.94	1	MTR3 630 20 HDG	300	450	10.58	1
MTR3 640 15 HDG	400	450	8.80	1	MTR3 640 20 HDG	400	450	11.73	1
MTR3 645 15 HDG	450	450	9.22	1	MTR3 645 20 HDG	450	450	12.30	1
MTR3 650 15 HDG	500	450	9.65	1	MTR3 650 20 HDG	500	450	12.87	1
MTR3 660 15 HDG	600	450	11.02	1	MTR3 660 20 HDG	600	450	14.69	1
MTR3 670 15 HDG	700	450	11.97	1	MTR3 670 20 HDG	700	450	15.96	1
MTR3 675 15 HDG	750	450	12.26	1	MTR3 675 20 HDG	750	450	16.34	1
MTR3 680 15 HDG	800	450	13.06	1	MTR3 680 20 HDG	800	450	17.41	1
MTR3 690 15 HDG	900	450	14.28	1	MTR3 690 20 HDG	900	450	19.04	1
MTR3 600 15 HDG	1000	450	16.06	1	MTR3 600 20 HDG	1000	450	21.41	1
MTR3 602 15 HDG	1200	450	18.23	1	MTR3 602 20 HDG	1200	450	24.31	1

Tee Horizontal Bend of Cable Ladder Radius:600

"T" Merdiven Yatay Dönüş Elemanı R:600 - T-отвод кабельроста горизонтальный радиус:600





Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8



Hot-Dip Galvanized

MTR4... H60					MTR4... H60				
1.5mm					2.0mm				
CODE	Width a=b=c mm	Radius R mm	kg 1pc	pcs	CODE	Width a=b=c mm	Radius R mm	kg 1pc	pcs
MTR4 610 15 HDG	100	600	6.53	1	MTR4 610 20 HDG	100	600	8.70	1
MTR4 615 15 HDG	150	600	7.79	1	MTR4 615 20 HDG	150	600	10.38	1
MTR4 620 15 HDG	200	600	8.21	1	MTR4 620 20 HDG	200	600	10.95	1
MTR4 625 15 HDG	250	600	8.63	1	MTR4 625 20 HDG	250	600	11.50	1
MTR4 630 15 HDG	300	600	9.44	1	MTR4 630 20 HDG	300	600	12.59	1
MTR4 640 15 HDG	400	600	10.62	1	MTR4 640 20 HDG	400	600	14.16	1
MTR4 645 15 HDG	450	600	11.10	1	MTR4 645 20 HDG	450	600	14.79	1
MTR4 650 15 HDG	500	600	11.57	1	MTR4 650 20 HDG	500	600	15.43	1
MTR4 660 15 HDG	600	600	12.52	1	MTR4 660 20 HDG	600	600	16.69	1
MTR4 670 15 HDG	700	600	13.47	1	MTR4 670 20 HDG	700	600	17.96	1
MTR4 675 15 HDG	750	600	13.95	1	MTR4 675 20 HDG	750	600	18.59	1
MTR4 680 15 HDG	800	600	15.02	1	MTR4 680 20 HDG	800	600	20.02	1
MTR4 690 15 HDG	900	600	16.70	1	MTR4 690 20 HDG	900	600	22.27	1
MTR4 600 15 HDG	1000	600	17.75	1	MTR4 600 20 HDG	1000	600	23.66	1
MTR4 602 15 HDG	1200	600	19.83	1	MTR4 602 20 HDG	1200	600	26.44	1

MTR3 H60 HDG

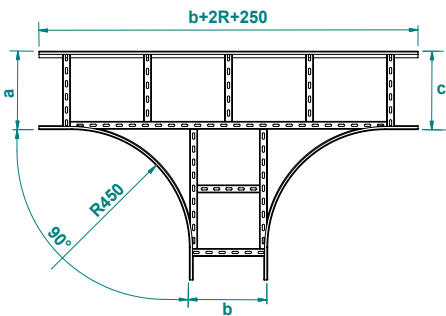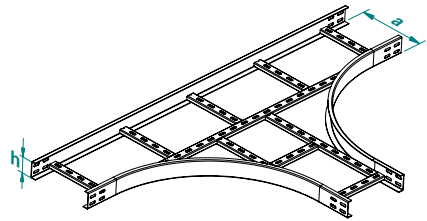

MTR4 H60 HDG

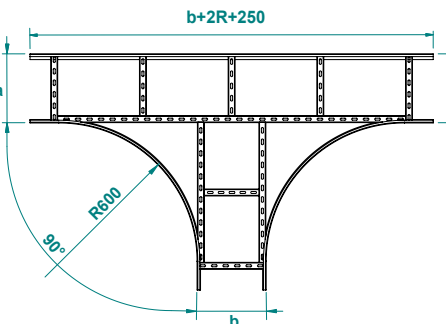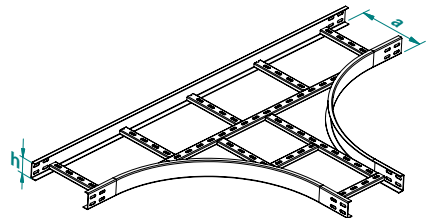

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method
to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0

Cable Ladder Systems of Side Height 60



MTK
MADE IN TURKEY

Cross Bend of Cable Ladder

Dörtlü Merdiven Dönüş Elemanı - Крестовина кабельроста



Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized

MD... H60		1.5mm			
CODE	Width a=b=c=d mm	Radius R mm	kg 1pc		
MD 610 15 HDG	100	150	2.12	1	
MD 615 15 HDG	150	150	2.29	1	
MD 620 15 HDG	200	150	2.45	1	
MD 625 15 HDG	250	150	3.28	1	
MD 630 15 HDG	300	150	3.77	1	
MD 640 15 HDG	400	150	4.35	1	
MD 645 15 HDG	450	150	4.64	1	
MD 650 15 HDG	500	150	4.93	1	
MD 660 15 HDG	600	150	6.12	1	
MD 670 15 HDG	700	150	7.36	1	
MD 675 15 HDG	750	150	7.81	1	
MD 680 15 HDG	800	150	8.14	1	
MD 690 15 HDG	900	150	9.79	1	
MD 600 15 HDG	1000	150	10.78	1	
MD 602 15 HDG	1200	150	14.36	1	

MD... H60		2.0mm			
CODE	Width a=b=c=d mm	Radius R mm	kg 1pc		
MD 610 20 HDG	100	150	2.83	1	
MD 615 20 HDG	150	150	3.05	1	
MD 620 20 HDG	200	150	3.27	1	
MD 625 20 HDG	250	150	4.37	1	
MD 630 20 HDG	300	150	5.03	1	
MD 640 20 HDG	400	150	5.80	1	
MD 645 20 HDG	450	150	6.18	1	
MD 650 20 HDG	500	150	6.57	1	
MD 660 20 HDG	600	150	8.16	1	
MD 670 20 HDG	700	150	9.81	1	
MD 675 20 HDG	750	150	10.41	1	
MD 680 20 HDG	800	150	10.85	1	
MD 690 20 HDG	900	150	13.05	1	
MD 600 20 HDG	1000	150	14.37	1	
MD 602 20 HDG	1200	150	19.15	1	

Cross Bend of Cable Ladder Radius:300

Dörtlü Merdiven Dönüş Elemanı R:300 - Крестовина кабельроста радиус:300



Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized



MDR2... H60		1.5mm			
CODE	Width a=b=c=d mm	Radius R mm	kg 1pc		
MDR2 610 15 HDG	100	300	5.23	1	
MDR2 615 15 HDG	150	300	5.51	1	
MDR2 620 15 HDG	200	300	6.06	1	
MDR2 625 15 HDG	250	300	6.43	1	
MDR2 630 15 HDG	300	300	6.79	1	
MDR2 640 15 HDG	400	300	7.62	1	
MDR2 645 15 HDG	450	300	7.99	1	
MDR2 650 15 HDG	500	300	8.35	1	
MDR2 660 15 HDG	600	300	11.11	1	
MDR2 670 15 HDG	700	300	12.03	1	
MDR2 675 15 HDG	750	300	12.49	1	
MDR2 680 15 HDG	800	300	13.04	1	
MDR2 690 15 HDG	900	300	14.42	1	
MDR2 600 15 HDG	1000	300	18.27	1	
MDR2 602 15 HDG	1200	300	20.34	1	

MDR2... H60		2.0mm			
CODE	Width a=b=c=d mm	Radius R mm	kg 1pc		
MDR2 610 20 HDG	100	300	6.97	1	
MDR2 615 20 HDG	150	300	7.34	1	
MDR2 620 20 HDG	200	300	8.08	1	
MDR2 625 20 HDG	250	300	8.57	1	
MDR2 630 20 HDG	300	300	9.06	1	
MDR2 640 20 HDG	400	300	10.16	1	
MDR2 645 20 HDG	450	300	10.65	1	
MDR2 650 20 HDG	500	300	11.14	1	
MDR2 660 20 HDG	600	300	14.81	1	
MDR2 670 20 HDG	700	300	16.04	1	
MDR2 675 20 HDG	750	300	16.65	1	
MDR2 680 20 HDG	800	300	17.38	1	
MDR2 690 20 HDG	900	300	19.22	1	
MDR2 600 20 HDG	1000	300	24.36	1	
MDR2 602 20 HDG	1200	300	27.12	1	

MD H60 HDG

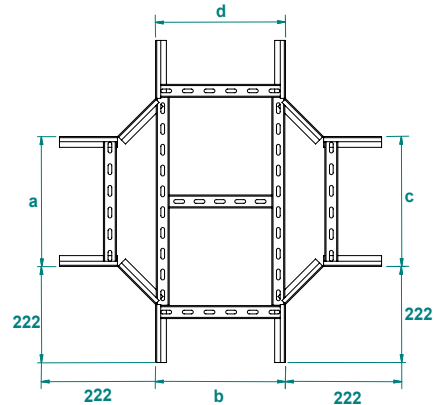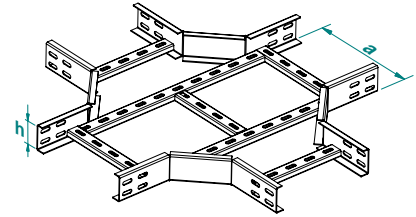

MDR2 H60 HDG

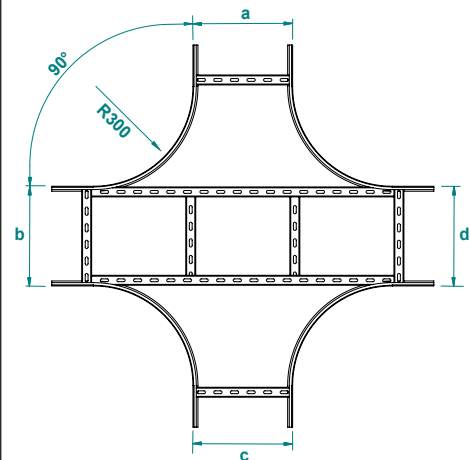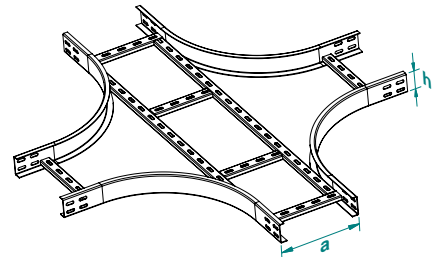

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method

to TS-EN 10346:2011 (PG)

SS- stainless steel AISI 304L and AISI 316L (SS)

EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0

Cable Ladder Systems of Side Height 60



MTK
MADE IN TURKEY

Cross Bend of Cable Ladder Radius:450

Dörtlülü Merdiven Dönüş Elemanı R:450 - Крестовина кабельроста радиус:450



Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized

MDR3... H60		1.5mm	
CODE	Width a=b=c=d mm	Radius R mm	1pc
MDR3 610 15 HDG	100	450	6.71 1
MDR3 615 15 HDG	150	450	8.32 1
MDR3 620 15 HDG	200	450	8.83 1
MDR3 625 15 HDG	250	450	10.16 1
MDR3 630 15 HDG	300	450	10.85 1
MDR3 640 15 HDG	400	450	11.86 1
MDR3 645 15 HDG	450	450	12.36 1
MDR3 650 15 HDG	500	450	14.11 1
MDR3 660 15 HDG	600	450	15.21 1
MDR3 670 15 HDG	700	450	16.86 1
MDR3 675 15 HDG	750	450	17.46 1
MDR3 680 15 HDG	800	450	18.88 1
MDR3 690 15 HDG	900	450	21.59 1
MDR3 600 15 HDG	1000	450	22.88 1
MDR3 602 15 HDG	1200	450	26.42 1

MDR3... H60		2.0mm	
CODE	Width a=b=c=d mm	Radius R mm	1pc
MDR3 610 20 HDG	100	450	8.95 1
MDR3 615 20 HDG	150	450	11.09 1
MDR3 620 20 HDG	200	450	11.77 1
MDR3 625 20 HDG	250	450	13.54 1
MDR3 630 20 HDG	300	450	14.46 1
MDR3 640 20 HDG	400	450	15.81 1
MDR3 645 20 HDG	450	450	16.48 1
MDR3 650 20 HDG	500	450	18.81 1
MDR3 660 20 HDG	600	450	20.28 1
MDR3 670 20 HDG	700	450	22.48 1
MDR3 675 20 HDG	750	450	23.28 1
MDR3 680 20 HDG	800	450	25.18 1
MDR3 690 20 HDG	900	450	28.79 1
MDR3 600 20 HDG	1000	450	30.50 1
MDR3 602 20 HDG	1200	450	35.22 1

Cross Bend of Cable Ladder Radius:600

Dörtlülü Merdiven Dönüş Elemanı R:600 - Крестовина кабельроста радиус:600



Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized



MDR4... H60		1.5mm	
CODE	Width a=b=c=d mm	Radius R mm	1pc
MDR4 610 15 HDG	100	600	8.75 1
MDR4 615 15 HDG	150	600	10.86 1
MDR4 620 15 HDG	200	600	11.41 1
MDR4 625 15 HDG	250	600	11.87 1
MDR4 630 15 HDG	300	600	13.16 1
MDR4 640 15 HDG	400	600	14.44 1
MDR4 645 15 HDG	450	600	15.00 1
MDR4 650 15 HDG	500	600	17.02 1
MDR4 660 15 HDG	600	600	18.21 1
MDR4 670 15 HDG	700	600	19.40 1
MDR4 675 15 HDG	750	600	20.60 1
MDR4 680 15 HDG	800	600	22.25 1
MDR4 690 15 HDG	900	600	25.37 1
MDR4 600 15 HDG	1000	600	26.75 1
MDR4 602 15 HDG	1200	600	29.55 1

MDR4... H60		2.0mm	
CODE	Width a=b=c=d mm	Radius R mm	1pc
MDR4 610 20 HDG	100	600	11.66 1
MDR4 615 20 HDG	150	600	14.48 1
MDR4 620 20 HDG	200	600	15.22 1
MDR4 625 20 HDG	250	600	15.83 1
MDR4 630 20 HDG	300	600	17.54 1
MDR4 640 20 HDG	400	600	19.26 1
MDR4 645 20 HDG	450	600	19.99 1
MDR4 650 20 HDG	500	600	22.69 1
MDR4 660 20 HDG	600	600	24.28 1
MDR4 670 20 HDG	700	600	25.87 1
MDR4 675 20 HDG	750	600	27.46 1
MDR4 680 20 HDG	800	600	29.67 1
MDR4 690 20 HDG	900	600	33.83 1
MDR4 600 20 HDG	1000	600	35.67 1
MDR4 602 20 HDG	1200	600	39.40 1

MDR3 H60 HDG

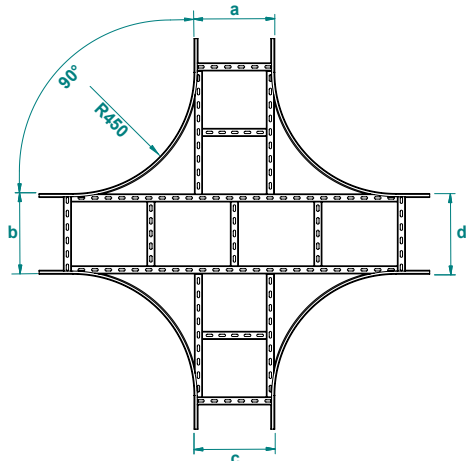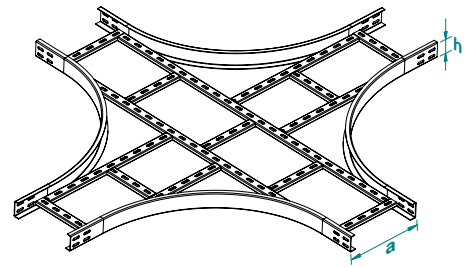

MDR4 H60 HDG

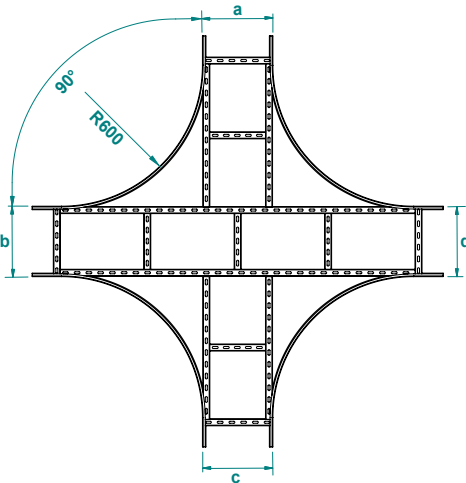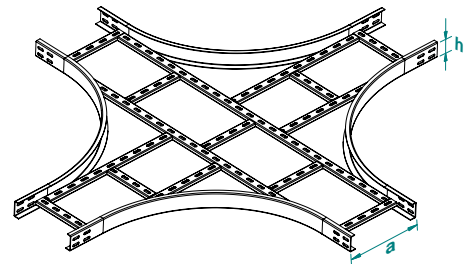

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method
to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: **1.5 2.0**

Cable Ladder Systems of Side Height 60



MTK
MADE IN TURKEY

Middle Reducer Bend of Cable Ladder

Merdiven Ortadan Redüksiyon - Редукционный переходник кабельроста, симметричный



Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized

ROSM... H60		1.5mm			
CODE	Width W1 mm	Width W2 mm	kg 1pc		
ROSM 615.10 15 HDG	150	100	1.33	1	
ROSM 620.15 15 HDG	200	150	1.41	1	
ROSM 620.10 15 HDG	200	100	1.37	1	
ROSM 625.20 15 HDG	250	200	1.49	1	
ROSM 625.15 15 HDG	250	150	1.45	1	
ROSM 625.10 15 HDG	250	100	1.41	1	
ROSM 630.25 15 HDG	300	250	1.58	1	
ROSM 630.20 15 HDG	300	200	1.54	1	
ROSM 630.15 15 HDG	300	150	1.49	1	
ROSM 630.10 15 HDG	300	100	1.45	1	
ROSM 640.30 15 HDG	400	300	1.70	1	
ROSM 640.25 15 HDG	400	250	1.66	1	
ROSM 640.20 15 HDG	400	200	1.62	1	
ROSM 640.15 15 HDG	400	150	1.58	1	
ROSM 640.10 15 HDG	400	100	1.54	1	
ROSM 645.40 15 HDG	450	400	1.82	1	
ROSM 645.30 15 HDG	450	300	1.74	1	
ROSM 645.25 15 HDG	450	250	1.70	1	
ROSM 645.20 15 HDG	450	200	1.66	1	
ROSM 645.15 15 HDG	450	150	1.62	1	
ROSM 645.10 15 HDG	450	100	1.58	1	
ROSM 650.45 15 HDG	500	450	1.91	1	
ROSM 650.40 15 HDG	500	400	1.87	1	
ROSM 650.30 15 HDG	500	300	1.78	1	
ROSM 650.25 15 HDG	500	250	1.74	1	
ROSM 650.20 15 HDG	500	200	1.70	1	
ROSM 650.15 15 HDG	500	150	1.66	1	
ROSM 650.10 15 HDG	500	100	1.62	1	
ROSM 660.50 15 HDG	600	500	2.03	1	
ROSM 660.45 15 HDG	600	450	1.99	1	
ROSM 660.40 15 HDG	600	400	1.95	1	
ROSM 660.30 15 HDG	600	300	1.87	1	
ROSM 660.25 15 HDG	600	250	1.82	1	
ROSM 660.20 15 HDG	600	200	1.78	1	
ROSM 660.15 15 HDG	600	150	1.74	1	
ROSM 660.10 15 HDG	600	100	1.70	1	
ROSM 675.60 15 HDG	750	600	2.24	1	
ROSM 675.50 15 HDG	750	500	2.15	1	
ROSM 675.45 15 HDG	750	450	2.11	1	
ROSM 675.40 15 HDG	750	400	2.07	1	
ROSM 675.30 15 HDG	750	300	1.99	1	
ROSM 675.20 15 HDG	750	200	1.91	1	
ROSM 675.15 15 HDG	750	150	1.87	1	
ROSM 690.75 15 HDG	900	750	2.48	1	
ROSM 690.60 15 HDG	900	600	2.36	1	
ROSM 690.45 15 HDG	900	450	2.24	1	
ROSM 690.30 15 HDG	900	300	2.11	1	
ROSM 690.15 15 HDG	900	150	2.08	1	
ROSM 602.90 15 HDG	1200	900	2.85	1	
ROSM 602.75 15 HDG	1200	750	2.73	1	
ROSM 602.60 15 HDG	1200	600	2.61	1	
ROSM 602.30 15 HDG	1200	300	4.49	1	
ROSM 602.15 15 HDG	1200	150	4.58	1	

ROSM... H60		2.0mm			
CODE	Width W1 mm	Width W2 mm	kg 1pc		
ROSM 615.10 20 HDG	150	100	1.77	1	
ROSM 620.15 20 HDG	200	150	1.88	1	
ROSM 620.10 20 HDG	200	100	1.83	1	
ROSM 625.20 20 HDG	250	200	1.99	1	
ROSM 625.15 20 HDG	250	150	1.94	1	
ROSM 625.10 20 HDG	250	100	1.88	1	
ROSM 630.25 20 HDG	300	250	2.10	1	
ROSM 630.20 20 HDG	300	200	2.05	1	
ROSM 630.15 20 HDG	300	150	1.99	1	
ROSM 630.10 20 HDG	300	100	1.94	1	
ROSM 640.30 20 HDG	400	300	2.27	1	
ROSM 640.25 20 HDG	400	250	2.21	1	
ROSM 640.20 20 HDG	400	200	2.16	1	
ROSM 640.15 20 HDG	400	150	2.10	1	
ROSM 640.10 20 HDG	400	100	2.05	1	
ROSM 645.40 20 HDG	450	400	2.43	1	
ROSM 645.30 20 HDG	450	300	2.32	1	
ROSM 645.25 20 HDG	450	250	2.27	1	
ROSM 645.20 20 HDG	450	200	2.21	1	
ROSM 645.15 20 HDG	450	150	2.16	1	
ROSM 645.10 20 HDG	450	100	2.10	1	
ROSM 650.45 20 HDG	500	450	2.54	1	
ROSM 650.40 20 HDG	500	400	2.49	1	
ROSM 650.30 20 HDG	500	300	2.38	1	
ROSM 650.25 20 HDG	500	250	2.32	1	
ROSM 650.20 20 HDG	500	200	2.27	1	
ROSM 650.15 20 HDG	500	150	2.21	1	
ROSM 650.10 20 HDG	500	100	2.16	1	
ROSM 660.50 20 HDG	600	500	2.71	1	
ROSM 660.45 20 HDG	600	450	2.65	1	
ROSM 660.40 20 HDG	600	400	2.60	1	
ROSM 660.30 20 HDG	600	300	2.49	1	
ROSM 660.25 20 HDG	600	250	2.43	1	
ROSM 660.20 20 HDG	600	200	2.38	1	
ROSM 660.15 20 HDG	600	150	2.32	1	
ROSM 660.10 20 HDG	600	100	2.27	1	
ROSM 675.60 20 HDG	750	600	2.98	1	
ROSM 675.50 20 HDG	750	500	2.87	1	
ROSM 675.45 20 HDG	750	450	2.82	1	
ROSM 675.40 20 HDG	750	400	2.76	1	
ROSM 675.30 20 HDG	750	300	2.65	1	
ROSM 675.20 20 HDG	750	200	2.54	1	
ROSM 675.15 20 HDG	750	150	2.49	1	
ROSM 690.75 20 HDG	900	750	3.31	1	
ROSM 690.60 20 HDG	900	600	3.14	1	
ROSM 690.45 20 HDG	900	450	2.98	1	
ROSM 690.30 20 HDG	900	300	2.82	1	
ROSM 690.15 20 HDG	900	150	3.97	1	
ROSM 602.90 20 HDG	1200	900	3.80	1	
ROSM 602.75 20 HDG	1200	750	3.64	1	
ROSM 602.60 20 HDG	1200	600	3.47	1	
ROSM 602.30 20 HDG	1200	300	5.99	1	
ROSM 602.15 20 HDG	1200	150	6.10	1	

ROSM H60 HDG

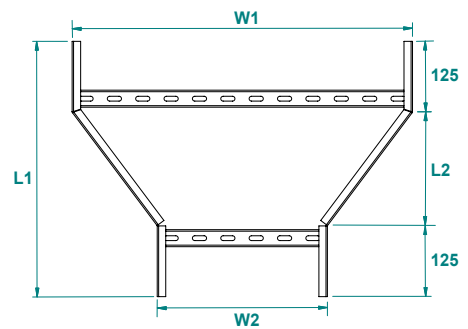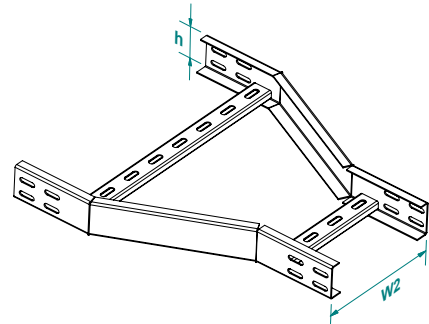

	L1	L2
100-600	450 mm	200 mm
700-1200	650 mm	400 mm



APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method
to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: **1.5 2.0**

Cable Ladder Systems of Side Height 60



MTK
MADE IN TURKEY

Left Reducer Bend of Cable Ladder

Merdiven Soldan Redüksiyon - Редукционный переходник кабельроста, левосторонний



Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized


RLSM... H60				1.5mm	
CODE	Width W1 mm	Width W2 mm	kg 1pc	pcs	
RLSM 615.10 15 HDG	150	100	1.33	1	
RLSM 620.15 15 HDG	200	150	1.41	1	
RLSM 620.10 15 HDG	200	100	1.37	1	
RLSM 625.20 15 HDG	250	200	1.49	1	
RLSM 625.15 15 HDG	250	150	1.45	1	
RLSM 625.10 15 HDG	250	100	1.41	1	
RLSM 630.25 15 HDG	300	250	1.58	1	
RLSM 630.20 15 HDG	300	200	1.54	1	
RLSM 630.15 15 HDG	300	150	1.49	1	
RLSM 630.10 15 HDG	300	100	1.45	1	
RLSM 640.30 15 HDG	400	300	1.70	1	
RLSM 640.25 15 HDG	400	250	1.66	1	
RLSM 640.20 15 HDG	400	200	1.62	1	
RLSM 640.15 15 HDG	400	150	1.58	1	
RLSM 640.10 15 HDG	400	100	1.54	1	
RLSM 645.40 15 HDG	450	400	1.82	1	
RLSM 645.30 15 HDG	450	300	1.74	1	
RLSM 645.25 15 HDG	450	250	1.70	1	
RLSM 645.20 15 HDG	450	200	1.66	1	
RLSM 645.15 15 HDG	450	150	1.62	1	
RLSM 645.10 15 HDG	450	100	1.58	1	
RLSM 650.45 15 HDG	500	450	1.91	1	
RLSM 650.40 15 HDG	500	400	1.87	1	
RLSM 650.30 15 HDG	500	300	1.78	1	
RLSM 650.25 15 HDG	500	250	1.74	1	
RLSM 650.20 15 HDG	500	200	1.70	1	
RLSM 650.15 15 HDG	500	150	1.66	1	
RLSM 650.10 15 HDG	500	100	1.62	1	
RLSM 660.50 15 HDG	600	500	2.03	1	
RLSM 660.45 15 HDG	600	450	1.99	1	
RLSM 660.40 15 HDG	600	400	1.95	1	
RLSM 660.30 15 HDG	600	300	1.87	1	
RLSM 660.25 15 HDG	600	250	1.82	1	
RLSM 660.20 15 HDG	600	200	1.78	1	
RLSM 660.15 15 HDG	600	150	1.74	1	
RLSM 660.10 15 HDG	600	100	1.70	1	
RLSM 675.60 15 HDG	750	600	2.24	1	
RLSM 675.50 15 HDG	750	500	2.15	1	
RLSM 675.45 15 HDG	750	450	2.11	1	
RLSM 675.40 15 HDG	750	400	2.07	1	
RLSM 675.30 15 HDG	750	300	1.99	1	
RLSM 675.20 15 HDG	750	200	1.91	1	
RLSM 675.15 15 HDG	750	150	1.87	1	
RLSM 690.75 15 HDG	900	750	2.48	1	
RLSM 690.60 15 HDG	900	600	2.36	1	
RLSM 690.45 15 HDG	900	450	2.24	1	
RLSM 690.30 15 HDG	900	300	2.11	1	
RLSM 690.15 15 HDG	900	150	2.08	1	
RLSM 602.90 15 HDG	1200	900	2.85	1	
RLSM 602.75 15 HDG	1200	750	2.73	1	
RLSM 602.60 15 HDG	1200	600	2.61	1	
RLSM 602.30 15 HDG	1200	300	4.49	1	
RLSM 602.15 15 HDG	1200	150	4.58	1	

RLSM... H60				2.0mm	
CODE	Width W1 mm	Width W2 mm	kg 1pc	pcs	
RLSM 615.10 20 HDG	150	100	1.77	1	
RLSM 620.15 20 HDG	200	150	1.88	1	
RLSM 620.10 20 HDG	200	100	1.83	1	
RLSM 625.20 20 HDG	250	200	1.99	1	
RLSM 625.15 20 HDG	250	150	1.94	1	
RLSM 625.10 20 HDG	250	100	1.88	1	
RLSM 630.25 20 HDG	300	250	2.10	1	
RLSM 630.20 20 HDG	300	200	2.05	1	
RLSM 630.15 20 HDG	300	150	1.99	1	
RLSM 630.10 20 HDG	300	100	1.94	1	
RLSM 640.30 20 HDG	400	300	2.27	1	
RLSM 640.25 20 HDG	400	250	2.21	1	
RLSM 640.20 20 HDG	400	200	2.16	1	
RLSM 640.15 20 HDG	400	150	2.10	1	
RLSM 640.10 20 HDG	400	100	2.05	1	
RLSM 645.40 20 HDG	450	400	2.43	1	
RLSM 645.30 20 HDG	450	300	2.32	1	
RLSM 645.25 20 HDG	450	250	2.27	1	
RLSM 645.20 20 HDG	450	200	2.21	1	
RLSM 645.15 20 HDG	450	150	2.16	1	
RLSM 645.10 20 HDG	450	100	2.10	1	
RLSM 650.45 20 HDG	500	450	2.54	1	
RLSM 650.40 20 HDG	500	400	2.49	1	
RLSM 650.30 20 HDG	500	300	2.38	1	
RLSM 650.25 20 HDG	500	250	2.32	1	
RLSM 650.20 20 HDG	500	200	2.27	1	
RLSM 650.15 20 HDG	500	150	2.21	1	
RLSM 650.10 20 HDG	500	100	2.16	1	
RLSM 660.50 20 HDG	600	500	2.71	1	
RLSM 660.45 20 HDG	600	450	2.65	1	
RLSM 660.40 20 HDG	600	400	2.60	1	
RLSM 660.30 20 HDG	600	300	2.49	1	
RLSM 660.25 20 HDG	600	250	2.43	1	
RLSM 660.20 20 HDG	600	200	2.38	1	
RLSM 660.15 20 HDG	600	150	2.32	1	
RLSM 660.10 20 HDG	600	100	2.27	1	
RLSM 675.60 20 HDG	750	600	2.98	1	
RLSM 675.50 20 HDG	750	500	2.87	1	
RLSM 675.45 20 HDG	750	450	2.82	1	
RLSM 675.40 20 HDG	750	400	2.76	1	
RLSM 675.30 20 HDG	750	300	2.65	1	
RLSM 675.20 20 HDG	750	200	2.54	1	
RLSM 675.15 20 HDG	750	150	2.49	1	
RLSM 690.75 20 HDG	900	750	3.31	1	
RLSM 690.60 20 HDG	900	600	3.14	1	
RLSM 690.45 20 HDG	900	450	2.98	1	
RLSM 690.30 20 HDG	900	300	2.82	1	
RLSM 690.15 20 HDG	900	150	3.97	1	
RLSM 602.90 20 HDG	1200	900	3.80	1	
RLSM 602.75 20 HDG	1200	750	3.64	1	
RLSM 602.60 20 HDG	1200	600	3.47	1	
RLSM 602.30 20 HDG	1200	300	5.99	1	
RLSM 602.15 20 HDG	1200	150	6.10	1	

RLSM H60 HDG

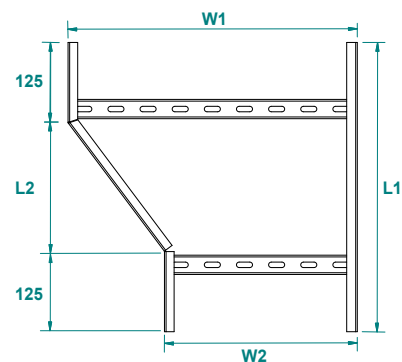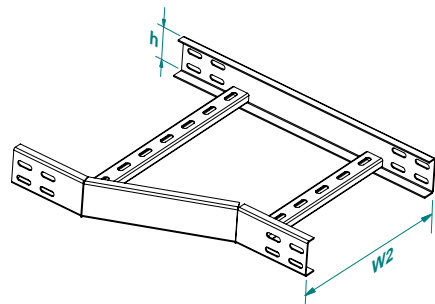

	L1	L2
100-600	450 mm	200 mm
700-1200	650 mm	400 mm

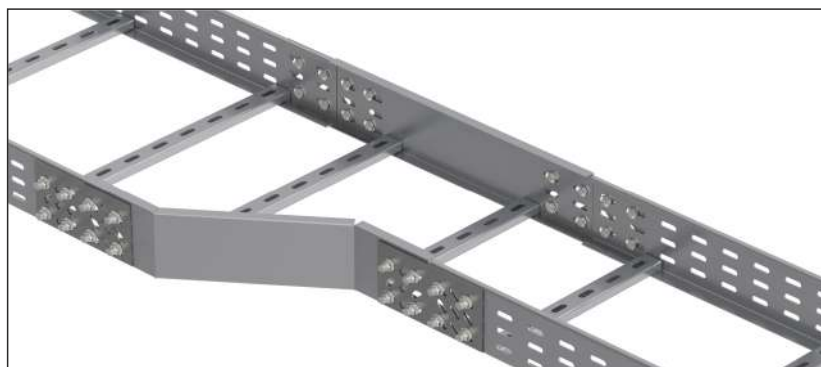

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: **1.5 2.0**

Cable Ladder Systems of Side Height 60



MTK
MADE IN TURKEY

Right Reducer Bend of Cable Ladder

Merdiven Sağdan Redüksiyon - Редукционный переходник кабельроста, правосторонний



Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized

RGSM... H60		1.5mm			
CODE	Width W1 mm	Width W1			
RGSM 615.10 15 HDG	150	100	1.33	1	
RGSM 620.15 15 HDG	200	150	1.41	1	
RGSM 620.10 15 HDG	200	100	1.37	1	
RGSM 625.20 15 HDG	250	200	1.49	1	
RGSM 625.15 15 HDG	250	150	1.45	1	
RGSM 625.10 15 HDG	250	100	1.41	1	
RGSM 630.25 15 HDG	300	250	1.58	1	
RGSM 630.20 15 HDG	300	200	1.54	1	
RGSM 630.15 15 HDG	300	150	1.49	1	
RGSM 630.10 15 HDG	300	100	1.45	1	
RGSM 640.30 15 HDG	400	300	1.70	1	
RGSM 640.25 15 HDG	400	250	1.66	1	
RGSM 640.20 15 HDG	400	200	1.62	1	
RGSM 640.15 15 HDG	400	150	1.58	1	
RGSM 640.10 15 HDG	400	100	1.54	1	
RGSM 645.40 15 HDG	450	400	1.82	1	
RGSM 645.30 15 HDG	450	300	1.74	1	
RGSM 645.25 15 HDG	450	250	1.70	1	
RGSM 645.20 15 HDG	450	200	1.66	1	
RGSM 645.15 15 HDG	450	150	1.62	1	
RGSM 645.10 15 HDG	450	100	1.58	1	
RGSM 650.45 15 HDG	500	450	1.91	1	
RGSM 650.40 15 HDG	500	400	1.87	1	
RGSM 650.30 15 HDG	500	300	1.78	1	
RGSM 650.25 15 HDG	500	250	1.74	1	
RGSM 650.20 15 HDG	500	200	1.70	1	
RGSM 650.15 15 HDG	500	150	1.66	1	
RGSM 650.10 15 HDG	500	100	1.62	1	
RGSM 660.50 15 HDG	600	500	2.03	1	
RGSM 660.45 15 HDG	600	450	1.99	1	
RGSM 660.40 15 HDG	600	400	1.95	1	
RGSM 660.30 15 HDG	600	300	1.87	1	
RGSM 660.25 15 HDG	600	250	1.82	1	
RGSM 660.20 15 HDG	600	200	1.78	1	
RGSM 660.15 15 HDG	600	150	1.74	1	
RGSM 660.10 15 HDG	600	100	1.70	1	
RGSM 675.60 15 HDG	750	600	2.24	1	
RGSM 675.50 15 HDG	750	500	2.15	1	
RGSM 675.45 15 HDG	750	450	2.11	1	
RGSM 675.40 15 HDG	750	400	2.07	1	
RGSM 675.30 15 HDG	750	300	1.99	1	
RGSM 675.20 15 HDG	750	200	1.91	1	
RGSM 675.15 15 HDG	750	150	1.87	1	
RGSM 690.75 15 HDG	900	750	2.48	1	
RGSM 690.60 15 HDG	900	600	2.36	1	
RGSM 690.45 15 HDG	900	450	2.24	1	
RGSM 690.30 15 HDG	900	300	2.11	1	
RGSM 690.15 15 HDG	900	150	2.08	1	
RGSM 602.90 15 HDG	1200	900	2.85	1	
RGSM 602.75 15 HDG	1200	750	2.73	1	
RGSM 602.60 15 HDG	1200	600	2.61	1	
RGSM 602.30 15 HDG	1200	300	4.49	1	
RGSM 602.15 15 HDG	1200	150	4.58	1	

RGSM... H60		2.0mm			
CODE	Width W1 mm	Width W1			
RGSM 615.10 20 HDG	150	100	1.77	1	
RGSM 620.15 20 HDG	200	150	1.88	1	
RGSM 620.10 20 HDG	200	100	1.83	1	
RGSM 625.20 20 HDG	250	200	1.99	1	
RGSM 625.15 20 HDG	250	150	1.94	1	
RGSM 625.10 20 HDG	250	100	1.88	1	
RGSM 630.25 20 HDG	300	250	2.10	1	
RGSM 630.20 20 HDG	300	200	2.05	1	
RGSM 630.15 20 HDG	300	150	1.99	1	
RGSM 630.10 20 HDG	300	100	1.94	1	
RGSM 640.30 20 HDG	400	300	2.27	1	
RGSM 640.25 20 HDG	400	250	2.21	1	
RGSM 640.20 20 HDG	400	200	2.16	1	
RGSM 640.15 20 HDG	400	150	2.10	1	
RGSM 640.10 20 HDG	400	100	2.05	1	
RGSM 645.40 20 HDG	450	400	2.43	1	
RGSM 645.30 20 HDG	450	300	2.32	1	
RGSM 645.25 20 HDG	450	250	2.27	1	
RGSM 645.20 20 HDG	450	200	2.21	1	
RGSM 645.15 20 HDG	450	150	2.16	1	
RGSM 645.10 20 HDG	450	100	2.10	1	
RGSM 650.45 20 HDG	500	450	2.54	1	
RGSM 650.40 20 HDG	500	400	2.49	1	
RGSM 650.30 20 HDG	500	300	2.38	1	
RGSM 650.25 20 HDG	500	250	2.32	1	
RGSM 650.20 20 HDG	500	200	2.27	1	
RGSM 650.15 20 HDG	500	150	2.21	1	
RGSM 650.10 20 HDG	500	100	2.16	1	
RGSM 660.50 20 HDG	600	500	2.71	1	
RGSM 660.45 20 HDG	600	450	2.65	1	
RGSM 660.40 20 HDG	600	400	2.60	1	
RGSM 660.30 20 HDG	600	300	2.49	1	
RGSM 660.25 20 HDG	600	250	2.43	1	
RGSM 660.20 20 HDG	600	200	2.38	1	
RGSM 660.15 20 HDG	600	150	2.32	1	
RGSM 660.10 20 HDG	600	100	2.27	1	
RGSM 675.60 20 HDG	750	600	2.98	1	
RGSM 675.50 20 HDG	750	500	2.87	1	
RGSM 675.45 20 HDG	750	450	2.82	1	
RGSM 675.40 20 HDG	750	400	2.76	1	
RGSM 675.30 20 HDG	750	300	2.65	1	
RGSM 675.20 20 HDG	750	200	2.54	1	
RGSM 675.15 20 HDG	750	150	2.49	1	
RGSM 690.75 20 HDG	900	750	3.31	1	
RGSM 690.60 20 HDG	900	600	3.14	1	
RGSM 690.45 20 HDG	900	450	2.98	1	
RGSM 690.30 20 HDG	900	300	2.82	1	
RGSM 690.15 20 HDG	900	150	3.97	1	
RGSM 602.90 20 HDG	1200	900	3.80	1	
RGSM 602.75 20 HDG	1200	750	3.64	1	
RGSM 602.60 20 HDG	1200	600	3.47	1	
RGSM 602.30 20 HDG	1200	300	5.99	1	
RGSM 602.15 20 HDG	1200	150	6.10	1	

RGSM H60 HDG

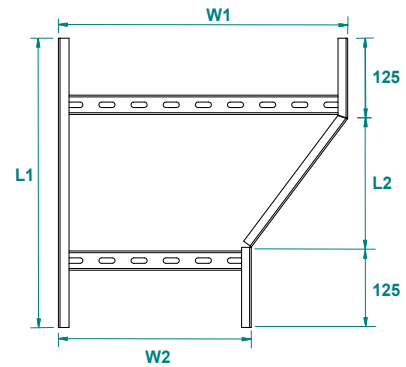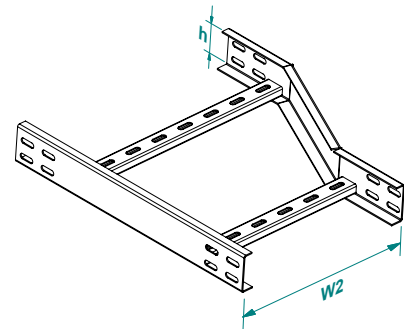

	L1	L2
100-600	450 mm	200 mm
700-1200	650 mm	400 mm



APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method
to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: **1.5 2.0**

Cable Ladder Systems of Side Height 60



MTK
MADE IN TURKEY

Vertical 90° Inside Bend of Cable Ladder (stable)

90° Dikey Merdiven İç Bükey Elemanı-(Sabit) - Арка фиксированная кабельроста, внутренняя 90°



Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized

MIS... H60		1.5mm			
CODE	Width a=b mm	Radius R mm	Kg 1pc	pcs	
MIS 610 15 HDG	100	150	1.48	1	
MIS 615 15 HDG	150	150	1.61	1	
MIS 620 15 HDG	200	150	1.73	1	
MIS 625 15 HDG	250	150	1.85	1	
MIS 630 15 HDG	300	150	1.98	1	
MIS 640 15 HDG	400	150	2.22	1	
MIS 645 15 HDG	450	150	2.35	1	
MIS 650 15 HDG	500	150	2.47	1	
MIS 660 15 HDG	600	150	2.72	1	
MIS 670 15 HDG	700	150	2.97	1	
MIS 675 15 HDG	750	150	3.09	1	
MIS 680 15 HDG	800	150	3.21	1	
MIS 690 15 HDG	900	150	3.46	1	
MIS 600 15 HDG	1000	150	3.71	1	
MIS 602 15 HDG	1200	150	4.20	1	

MIS... H60		2.0mm			
CODE	Width a=b mm	Radius R mm	Kg 1pc	pcs	
MIS 610 20 HDG	100	150	1.98	1	
MIS 615 20 HDG	150	150	2.14	1	
MIS 620 20 HDG	200	150	2.31	1	
MIS 625 20 HDG	250	150	2.47	1	
MIS 630 20 HDG	300	150	2.63	1	
MIS 640 20 HDG	400	150	2.96	1	
MIS 645 20 HDG	450	150	3.13	1	
MIS 650 20 HDG	500	150	3.29	1	
MIS 660 20 HDG	600	150	3.62	1	
MIS 670 20 HDG	700	150	3.95	1	
MIS 675 20 HDG	750	150	4.12	1	
MIS 680 20 HDG	800	150	4.28	1	
MIS 690 20 HDG	900	150	4.61	1	
MIS 600 20 HDG	1000	150	4.94	1	
MIS 602 20 HDG	1200	150	5.60	1	

Vertical 90° Inside Bend of Cable Ladder (stable) Radius:300

90° Dikey Merdiven İç Bükey Elemanı-(Sabit) Radyus:300 - Арка фиксированная кабельроста, внутренняя 90° радиус:300



Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized



MISR2... H60		1.5mm			
CODE	Width a=b mm	Radius R mm	Kg 1pc	pcs	
MISR2 610 15 HDG	100	300	2.68	1	
MISR2 615 15 HDG	150	300	2.82	1	
MISR2 620 15 HDG	200	300	2.96	1	
MISR2 625 15 HDG	250	300	3.09	1	
MISR2 630 15 HDG	300	300	3.23	1	
MISR2 640 15 HDG	400	300	3.51	1	
MISR2 645 15 HDG	450	300	3.64	1	
MISR2 650 15 HDG	500	300	3.78	1	
MISR2 660 15 HDG	600	300	4.06	1	
MISR2 670 15 HDG	700	300	4.33	1	
MISR2 675 15 HDG	750	300	4.47	1	
MISR2 680 15 HDG	800	300	4.61	1	
MISR2 690 15 HDG	900	300	4.88	1	
MISR2 600 15 HDG	1000	300	5.16	1	
MISR2 602 15 HDG	1200	300	5.71	1	

MISR2... H60		2.0mm			
CODE	Width a=b mm	Radius R mm	Kg 1pc	pcs	
MISR2 610 20 HDG	100	300	3.57	1	
MISR2 615 20 HDG	150	300	3.76	1	
MISR2 620 20 HDG	200	300	3.94	1	
MISR2 625 20 HDG	250	300	4.12	1	
MISR2 630 20 HDG	300	300	4.31	1	
MISR2 640 20 HDG	400	300	4.67	1	
MISR2 645 20 HDG	450	300	4.86	1	
MISR2 650 20 HDG	500	300	5.04	1	
MISR2 660 20 HDG	600	300	5.41	1	
MISR2 670 20 HDG	700	300	5.78	1	
MISR2 675 20 HDG	750	300	5.96	1	
MISR2 680 20 HDG	800	300	6.14	1	
MISR2 690 20 HDG	900	300	6.51	1	
MISR2 600 20 HDG	1000	300	6.88	1	
MISR2 602 20 HDG	1200	300	7.61	1	

MIS H60 HDG

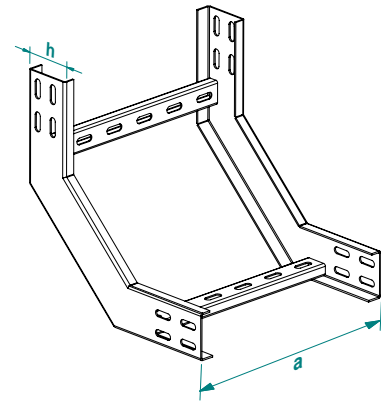

MISR2 H60 HDG

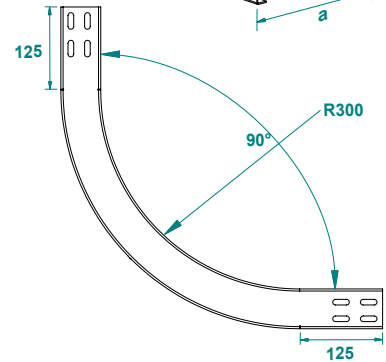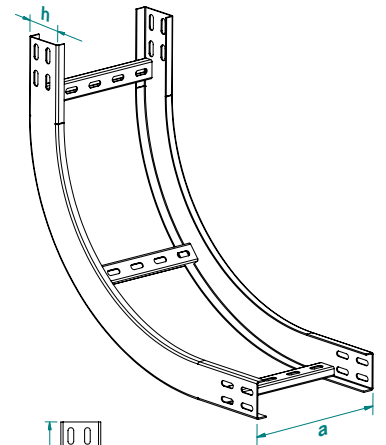

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method
to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0

Cable Ladder Systems of Side Height 60



MTK
MADE IN TURKEY

Vertical 90° Inside Bend of Cable Ladder (stable) Radius:450

90° Dikey Merdiven İç Bükey Elemanı-(Sabit) Radyus:450 - 90° Dikey Merdiven İç Bükey Elemanı-(Sabit) Radyus:450



Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized

MISR3... H60		1.5mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
MISR3 610 15 HDG	100	450	3.67	1	
MISR3 615 15 HDG	150	450	3.86	1	
MISR3 620 15 HDG	200	450	4.04	1	
MISR3 625 15 HDG	250	450	4.22	1	
MISR3 630 15 HDG	300	450	4.41	1	
MISR3 640 15 HDG	400	450	4.77	1	
MISR3 645 15 HDG	450	450	4.96	1	
MISR3 650 15 HDG	500	450	5.14	1	
MISR3 660 15 HDG	600	450	5.51	1	
MISR3 670 15 HDG	700	450	5.88	1	
MISR3 675 15 HDG	750	450	6.06	1	
MISR3 680 15 HDG	800	450	6.24	1	
MISR3 690 15 HDG	900	450	6.61	1	
MISR3 600 15 HDG	1000	450	6.98	1	
MISR3 602 15 HDG	1200	450	7.71	1	

MISR3... H60		2.0mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
MISR3 610 20 HDG	100	450	4.89	1	
MISR3 615 20 HDG	150	450	5.14	1	
MISR3 620 20 HDG	200	450	5.38	1	
MISR3 625 20 HDG	250	450	5.63	1	
MISR3 630 20 HDG	300	450	5.87	1	
MISR3 640 20 HDG	400	450	6.36	1	
MISR3 645 20 HDG	450	450	6.61	1	
MISR3 650 20 HDG	500	450	6.85	1	
MISR3 660 20 HDG	600	450	7.34	1	
MISR3 670 20 HDG	700	450	7.83	1	
MISR3 675 20 HDG	750	450	8.08	1	
MISR3 680 20 HDG	800	450	8.32	1	
MISR3 690 20 HDG	900	450	8.81	1	
MISR3 600 20 HDG	1000	450	9.30	1	
MISR3 602 20 HDG	1200	450	10.28	1	

Vertical 90° Inside Bend of Cable Ladder (stable) Radius:600

90° Dikey Merdiven İç Bükey Elemanı-(Sabit) Radyus:600 - Арка фиксированная кабельроста, внутренняя 90° радиус:600



Important!


To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized


MISR4... H60		1.5mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
MISR4 610 15 HDG	100	600	4.66	1	
MISR4 615 15 HDG	150	600	4.89	1	
MISR4 620 15 HDG	200	600	5.12	1	
MISR4 625 15 HDG	250	600	5.35	1	
MISR4 630 15 HDG	300	600	5.58	1	
MISR4 640 15 HDG	400	600	6.04	1	
MISR4 645 15 HDG	450	600	6.27	1	
MISR4 650 15 HDG	500	600	6.50	1	
MISR4 660 15 HDG	600	600	6.96	1	
MISR4 670 15 HDG	700	600	7.42	1	
MISR4 675 15 HDG	750	600	7.65	1	
MISR4 680 15 HDG	800	600	7.88	1	
MISR4 690 15 HDG	900	600	8.34	1	
MISR4 600 15 HDG	1000	600	8.80	1	
MISR4 602 15 HDG	1200	600	9.72	1	

MISR4... H60		2.0mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
MISR4 610 20 HDG	100	600	6.22	1	
MISR4 615 20 HDG	150	600	6.52	1	
MISR4 620 20 HDG	200	600	6.83	1	
MISR4 625 20 HDG	250	600	7.14	1	
MISR4 630 20 HDG	300	600	7.44	1	
MISR4 640 20 HDG	400	600	8.05	1	
MISR4 645 20 HDG	450	600	8.36	1	
MISR4 650 20 HDG	500	600	8.67	1	
MISR4 660 20 HDG	600	600	9.28	1	
MISR4 670 20 HDG	700	600	9.89	1	
MISR4 675 20 HDG	750	600	10.20	1	
MISR4 680 20 HDG	800	600	10.50	1	
MISR4 690 20 HDG	900	600	11.12	1	
MISR4 600 20 HDG	1000	600	11.73	1	
MISR4 602 20 HDG	1200	600	12.95	1	

MISR3 H60 HDG

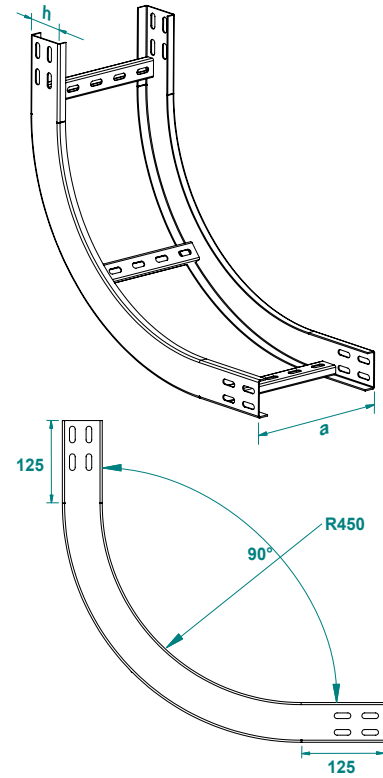

MISR4 H60 HDG

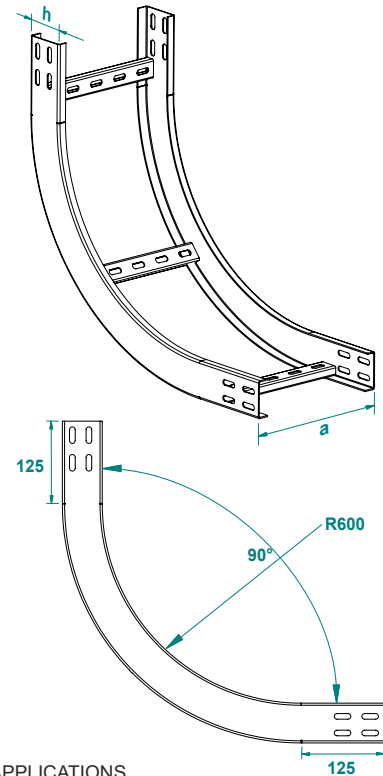

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: **1.5 2.0**

Cable Ladder Systems of Side Height 60



MTK
MADE IN TURKEY

Vertical 60° Inside Bend of Cable Ladder (stable)

60° Dikey Merdiven İç Bükey Elemanı-(Sabit) - Арка фиксированная кабельроста, внутренняя 60°



Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized

MIS60... H60		1.5mm		
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs
MIS60 610 15 HDG	100	150	1.37	1
MIS60 615 15 HDG	150	150	1.49	1
MIS60 620 15 HDG	200	150	1.62	1
MIS60 625 15 HDG	250	150	1.74	1
MIS60 630 15 HDG	300	150	1.87	1
MIS60 640 15 HDG	400	150	2.11	1
MIS60 645 15 HDG	450	150	2.24	1
MIS60 650 15 HDG	500	150	2.36	1
MIS60 660 15 HDG	600	150	2.61	1
MIS60 670 15 HDG	700	150	2.85	1
MIS60 675 15 HDG	750	150	2.98	1
MIS60 680 15 HDG	800	150	3.10	1
MIS60 690 15 HDG	900	150	3.35	1
MIS60 600 15 HDG	1000	150	3.60	1
MIS60 602 15 HDG	1200	150	4.09	1

MIS60... H60		2.0mm		
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs
MIS60 610 20 HDG	100	150	1.83	1
MIS60 615 20 HDG	150	150	1.99	1
MIS60 620 20 HDG	200	150	2.16	1
MIS60 625 20 HDG	250	150	2.32	1
MIS60 630 20 HDG	300	150	2.49	1
MIS60 640 20 HDG	400	150	2.82	1
MIS60 645 20 HDG	450	150	2.98	1
MIS60 650 20 HDG	500	150	3.14	1
MIS60 660 20 HDG	600	150	3.47	1
MIS60 670 20 HDG	700	150	3.80	1
MIS60 675 20 HDG	750	150	3.97	1
MIS60 680 20 HDG	800	150	4.13	1
MIS60 690 20 HDG	900	150	4.46	1
MIS60 600 20 HDG	1000	150	4.79	1
MIS60 602 20 HDG	1200	150	5.45	1

Vertical 60° Inside Bend of Cable Ladder (stable) Radius:300

60° Dikey Merdiven İç Bükey Elemanı-(Sabit) Radyus:300 - Арка фиксированная кабельроста, внутренняя 60° радиус:300



Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized



MIS60R2... H60		1.5mm		
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs
MIS60R2 610 15 HDG	100	300	2.20	1
MIS60R2 615 15 HDG	150	300	2.34	1
MIS60R2 620 15 HDG	200	300	2.48	1
MIS60R2 625 15 HDG	250	300	2.61	1
MIS60R2 630 15 HDG	300	300	2.75	1
MIS60R2 640 15 HDG	400	300	3.03	1
MIS60R2 645 15 HDG	450	300	3.16	1
MIS60R2 650 15 HDG	500	300	3.03	1
MIS60R2 660 15 HDG	600	300	3.58	1
MIS60R2 670 15 HDG	700	300	3.85	1
MIS60R2 675 15 HDG	750	300	3.99	1
MIS60R2 680 15 HDG	800	300	4.13	1
MIS60R2 690 15 HDG	900	300	4.40	1
MIS60R2 600 15 HDG	1000	300	4.68	1
MIS60R2 602 15 HDG	1200	300	5.23	1

MIS60R2... H60		2.0mm		
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs
MIS60R2 610 20 HDG	100	300	2.93	1
MIS60R2 615 20 HDG	150	300	3.12	1
MIS60R2 620 20 HDG	200	300	3.30	1
MIS60R2 625 20 HDG	250	300	3.48	1
MIS60R2 630 20 HDG	300	300	3.67	1
MIS60R2 640 20 HDG	400	300	4.03	1
MIS60R2 645 20 HDG	450	300	4.22	1
MIS60R2 650 20 HDG	500	300	4.40	1
MIS60R2 660 20 HDG	600	300	4.77	1
MIS60R2 670 20 HDG	700	300	5.14	1
MIS60R2 675 20 HDG	750	300	5.32	1
MIS60R2 680 20 HDG	800	300	5.50	1
MIS60R2 690 20 HDG	900	300	5.87	1
MIS60R2 600 20 HDG	1000	300	6.24	1
MIS60R2 602 20 HDG	1200	300	6.97	1

MIS60 H60 HDG

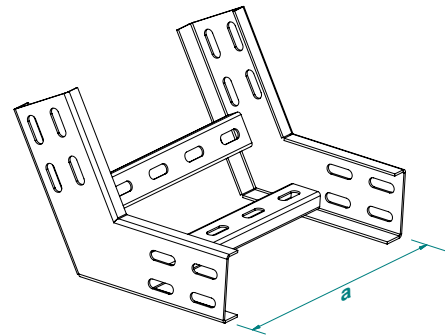

MIS60R2 H60 HDG

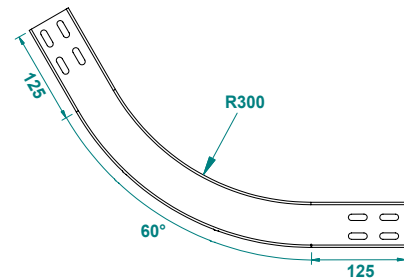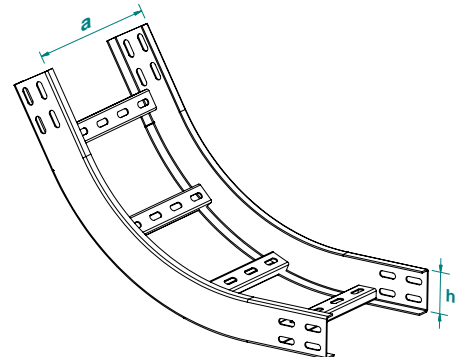

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0

Cable Ladder Systems of Side Height 60



MTK
MADE IN TURKEY

Vertical 60° Inside Bend of Cable Ladder (stable) Radius:450

60° Dikey Merdiven İç Büküye Elemanı-(Sabit) Radyus:450 - Арка фиксированная кабельроста, внутренняя 60° радиус:450



Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized

MIS60R3... H60		1.5mm			
CODE	Width a=b mm	Radius R mm	Kg 1pc	pcs	
MIS60R3 610 15 HDG	100	450	2.79	1	
MIS60R3 615 15 HDG	150	450	2.92	1	
MIS60R3 620 15 HDG	200	450	3.06	1	
MIS60R3 625 15 HDG	250	450	3.20	1	
MIS60R3 630 15 HDG	300	450	3.34	1	
MIS60R3 640 15 HDG	400	450	3.61	1	
MIS60R3 645 15 HDG	450	450	3.75	1	
MIS60R3 650 15 HDG	500	450	3.89	1	
MIS60R3 660 15 HDG	600	450	4.16	1	
MIS60R3 670 15 HDG	700	450	4.44	1	
MIS60R3 675 15 HDG	750	450	4.58	1	
MIS60R3 680 15 HDG	800	450	4.71	1	
MIS60R3 690 15 HDG	900	450	4.99	1	
MIS60R3 600 15 HDG	1000	450	5.27	1	
MIS60R3 602 15 HDG	1200	450	5.82	1	

MIS60R3... H60		2.0mm			
CODE	Width a=b mm	Radius R mm	Kg 1pc	pcs	
MIS60R3 610 20 HDG	100	450	3.71	1	
MIS60R3 615 20 HDG	150	450	3.90	1	
MIS60R3 620 20 HDG	200	450	4.08	1	
MIS60R3 625 20 HDG	250	450	4.26	1	
MIS60R3 630 20 HDG	300	450	4.45	1	
MIS60R3 640 20 HDG	400	450	4.81	1	
MIS60R3 645 20 HDG	450	450	5.00	1	
MIS60R3 650 20 HDG	500	450	5.18	1	
MIS60R3 660 20 HDG	600	450	5.55	1	
MIS60R3 670 20 HDG	700	450	5.92	1	
MIS60R3 675 20 HDG	750	450	6.10	1	
MIS60R3 680 20 HDG	800	450	6.28	1	
MIS60R3 690 20 HDG	900	450	6.65	1	
MIS60R3 600 20 HDG	1000	450	7.02	1	
MIS60R3 602 20 HDG	1200	450	7.75	1	

Vertical 60° Inside Bend of Cable Ladder (stable) Radius:600

60° Dikey Merdiven İç Büküye Elemanı-(Sabit) Radyus:600 - Арка фиксированная кабельроста, внутренняя 60° радиус:600



Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized



MIS60R4... H60		1.5mm			
CODE	Width a=b mm	Radius R mm	Kg 1pc	pcs	
MIS60R4 610 15 HDG	100	600	3.19	1	
MIS60R4 615 15 HDG	150	600	3.38	1	
MIS60R4 620 15 HDG	200	600	3.56	1	
MIS60R4 625 15 HDG	250	600	3.74	1	
MIS60R4 630 15 HDG	300	600	3.93	1	
MIS60R4 640 15 HDG	400	600	4.29	1	
MIS60R4 645 15 HDG	450	600	4.48	1	
MIS60R4 650 15 HDG	500	600	4.66	1	
MIS60R4 660 15 HDG	600	600	5.03	1	
MIS60R4 670 15 HDG	700	600	5.40	1	
MIS60R4 675 15 HDG	750	600	5.58	1	
MIS60R4 680 15 HDG	800	600	5.76	1	
MIS60R4 690 15 HDG	900	600	6.13	1	
MIS60R4 600 15 HDG	1000	600	6.50	1	
MIS60R4 602 15 HDG	1200	600	7.23	1	

MIS60R4... H60		2.0mm			
CODE	Width a=b mm	Radius R mm	Kg 1pc	pcs	
MISR4 610 20 HDG	100	600	4.25	1	
MISR4 615 20 HDG	150	600	4.50	1	
MISR4 620 20 HDG	200	600	4.74	1	
MISR4 625 20 HDG	250	600	4.99	1	
MISR4 630 20 HDG	300	600	5.23	1	
MISR4 640 20 HDG	400	600	5.72	1	
MISR4 645 20 HDG	450	600	5.97	1	
MISR4 650 20 HDG	500	600	6.21	1	
MISR4 660 20 HDG	600	600	6.70	1	
MISR4 670 20 HDG	700	600	7.19	1	
MISR4 675 20 HDG	750	600	7.44	1	
MISR4 680 20 HDG	800	600	7.68	1	
MISR4 690 20 HDG	900	600	8.17	1	
MISR4 600 20 HDG	1000	600	8.66	1	
MISR4 602 20 HDG	1200	600	9.64	1	

MIS60R3 H60 HDG

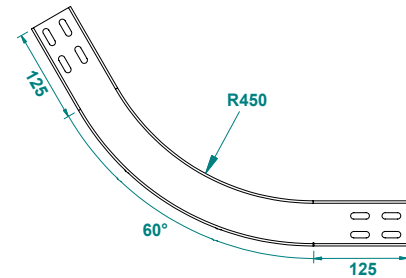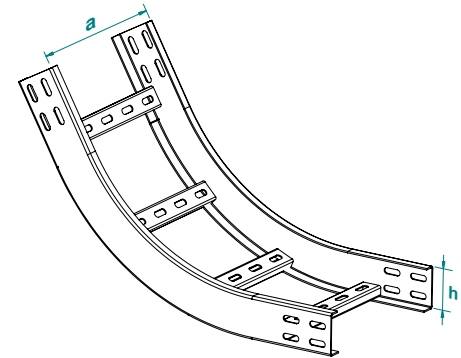

MIS60R4 H60 HDG

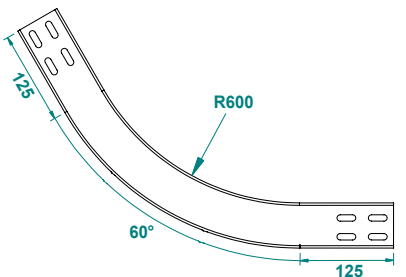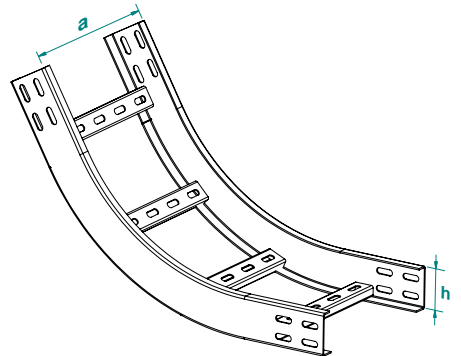

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0

Cable Ladder Systems of Side Height 60



MTK
MADE IN TURKEY

Vertical 45° Inside Bend of Cable Ladder (stable)

45° Dikey Merdiven İç Bükey Elemanı-(Sabit) - Арка фиксированная кабельроста, внутренняя 45°



Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized



MIS45... H60		1.5mm			
CODE	Width a=b mm	Radius R mm	kg 1pc		
MIS45 610 15 HDG	100	150	0.84	1	
MIS45 615 15 HDG	150	150	0.92	1	
MIS45 620 15 HDG	200	150	1.01	1	
MIS45 625 15 HDG	250	150	1.09	1	
MIS45 630 15 HDG	300	150	1.17	1	
MIS45 640 15 HDG	400	150	1.34	1	
MIS45 645 15 HDG	450	150	1.42	1	
MIS45 650 15 HDG	500	150	1.50	1	
MIS45 660 15 HDG	600	150	1.67	1	
MIS45 670 15 HDG	700	150	1.83	1	
MIS45 675 15 HDG	750	150	1.91	1	
MIS45 680 15 HDG	800	150	1.99	1	
MIS45 690 15 HDG	900	150	2.16	1	
MIS45 600 15 HDG	1000	150	2.32	1	
MIS45 602 15 HDG	1200	150	2.65	1	

MIS45... H60		2.0mm			
CODE	Width a=b mm	Radius R mm	kg 1pc		
MIS45 610 20 HDG	100	150	1.12	1	
MIS45 615 20 HDG	150	150	1.23	1	
MIS45 620 20 HDG	200	150	1.34	1	
MIS45 625 20 HDG	250	150	1.45	1	
MIS45 630 20 HDG	300	150	1.56	1	
MIS45 640 20 HDG	400	150	1.78	1	
MIS45 645 20 HDG	450	150	1.89	1	
MIS45 650 20 HDG	500	150	2.00	1	
MIS45 660 20 HDG	600	150	2.22	1	
MIS45 670 20 HDG	700	150	2.44	1	
MIS45 675 20 HDG	750	150	2.55	1	
MIS45 680 20 HDG	800	150	2.66	1	
MIS45 690 20 HDG	900	150	2.88	1	
MIS45 600 20 HDG	1000	150	3.10	1	
MIS45 602 20 HDG	1200	150	3.54	1	

MIS45 H60 HDG

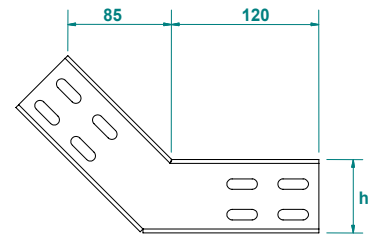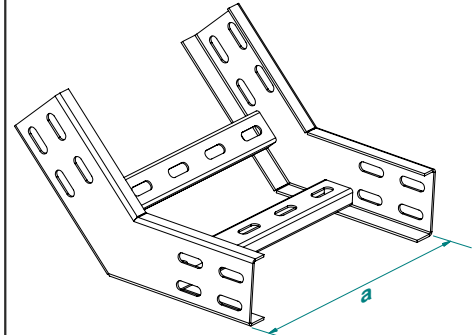

MIS45R2 60 HDG

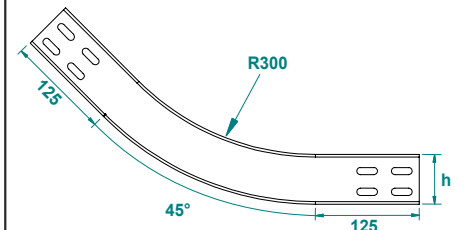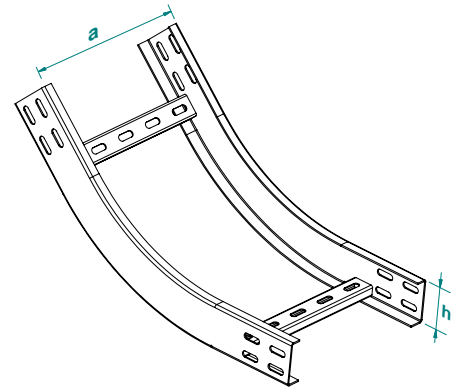

Vertical 45° Inside Bend of Cable Ladder (stable) Radius:300

45° Dikey Merdiven İç Bükey Elemanı-(Sabit) Radyus:300 - Арка фиксированная кабельроста, внутренняя 45° радиус:300



Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized

MIS45R2... H60		1.5mm			
CODE	Width a=b mm	Radius R mm	kg 1pc		
MIS45R2 610 15 HDG	100	300	1.63	1	
MIS45R2 615 15 HDG	150	300	1.72	1	
MIS45R2 620 15 HDG	200	300	1.81	1	
MIS45R2 625 15 HDG	250	300	1.90	1	
MIS45R2 630 15 HDG	300	300	2.00	1	
MIS45R2 640 15 HDG	400	300	2.18	1	
MIS45R2 645 15 HDG	450	300	2.27	1	
MIS45R2 650 15 HDG	500	300	2.36	1	
MIS45R2 660 15 HDG	600	300	2.55	1	
MIS45R2 670 15 HDG	700	300	2.73	1	
MIS45R2 675 15 HDG	750	300	2.82	1	
MIS45R2 680 15 HDG	800	300	2.91	1	
MIS45R2 690 15 HDG	900	300	3.10	1	
MIS45R2 600 15 HDG	1000	300	3.28	1	
MIS45R2 602 15 HDG	1200	300	3.65	1	

MIS45R2... H60		2.0mm			
CODE	Width a=b mm	Radius R mm	kg 1pc		
MIS45R2 610 20 HDG	100	300	2.17	1	
MIS45R2 615 20 HDG	150	300	2.29	1	
MIS45R2 620 20 HDG	200	300	2.41	1	
MIS45R2 625 20 HDG	250	300	2.54	1	
MIS45R2 630 20 HDG	300	300	2.66	1	
MIS45R2 640 20 HDG	400	300	2.90	1	
MIS45R2 645 20 HDG	450	300	3.03	1	
MIS45R2 650 20 HDG	500	300	3.15	1	
MIS45R2 660 20 HDG	600	300	3.39	1	
MIS45R2 670 20 HDG	700	300	3.64	1	
MIS45R2 675 20 HDG	750	300	3.76	1	
MIS45R2 680 20 HDG	800	300	3.88	1	
MIS45R2 690 20 HDG	900	300	4.13	1	
MIS45R2 600 20 HDG	1000	300	4.37	1	
MIS45R2 602 20 HDG	1200	300	4.86	1	

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method
to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0

Cable Ladder Systems of Side Height 60



MTK
MADE IN TURKEY

Vertical 45° Inside Bend of Cable Ladder (stable) Radius:450

45° Dikey Merdiven İç Bükey Elemanı-(Sabit) Radyus:450 - Арка фиксированная кабельроста, внутренняя 45° радиус:450



Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized

MIS45R3... H60					1.5mm	
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs		
MIS45R3 610 15 HDG	100	450	1.99	1		
MIS45R3 615 15 HDG	150	450	2.13	1		
MIS45R3 620 15 HDG	200	450	2.27	1		
MIS45R3 625 15 HDG	250	450	2.40	1		
MIS45R3 630 15 HDG	300	450	2.54	1		
MIS45R3 640 15 HDG	400	450	2.82	1		
MIS45R3 645 15 HDG	450	450	2.95	1		
MIS45R3 650 15 HDG	500	450	3.09	1		
MIS45R3 660 15 HDG	600	450	3.37	1		
MIS45R3 670 15 HDG	700	450	3.64	1		
MIS45R3 675 15 HDG	750	450	3.78	1		
MIS45R3 680 15 HDG	800	450	3.92	1		
MIS45R3 690 15 HDG	900	450	4.19	1		
MIS45R3 600 15 HDG	1000	450	4.47	1		
MIS45R3 602 15 HDG	1200	450	5.02	1		

MIS45R3... H60					2.0mm	
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs		
MIS45R3 610 20 HDG	100	450	2.65	1		
MIS45R3 615 20 HDG	150	450	2.84	1		
MIS45R3 620 20 HDG	200	450	3.02	1		
MIS45R3 625 20 HDG	250	450	3.20	1		
MIS45R3 630 20 HDG	300	450	3.39	1		
MIS45R3 640 20 HDG	400	450	3.75	1		
MIS45R3 645 20 HDG	450	450	3.94	1		
MIS45R3 650 20 HDG	500	450	4.12	1		
MIS45R3 660 20 HDG	600	450	4.49	1		
MIS45R3 670 20 HDG	700	450	4.86	1		
MIS45R3 675 20 HDG	750	450	5.04	1		
MIS45R3 680 20 HDG	800	450	5.22	1		
MIS45R3 690 20 HDG	900	450	5.59	1		
MIS45R3 600 20 HDG	1000	450	5.96	1		
MIS45R3 602 20 HDG	1200	450	6.69	1		

Vertical 45° Inside Bend of Cable Ladder (stable) Radius:600

45° Dikey Merdiven İç Bükey Elemanı-(Sabit) Radyus:600 - Арка фиксированная кабельроста, внутренняя 45° радиус:600



Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized



MIS45R4... H60					1.5mm	
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs		
MIS45R4 610 15 HDG	100	600	2.29	1		
MIS45R4 615 15 HDG	150	600	2.43	1		
MIS45R4 620 15 HDG	200	600	2.57	1		
MIS45R4 625 15 HDG	250	600	2.70	1		
MIS45R4 630 15 HDG	300	600	2.84	1		
MIS45R4 640 15 HDG	400	600	3.12	1		
MIS45R4 645 15 HDG	450	600	3.25	1		
MIS45R4 650 15 HDG	500	600	3.39	1		
MIS45R4 660 15 HDG	600	600	3.67	1		
MIS45R4 670 15 HDG	700	600	3.94	1		
MIS45R4 675 15 HDG	750	600	4.08	1		
MIS45R4 680 15 HDG	800	600	4.22	1		
MIS45R4 690 15 HDG	900	600	4.49	1		
MIS45R4 600 15 HDG	1000	600	4.77	1		
MIS45R4 602 15 HDG	1200	600	5.32	1		

MIS45R4... H60					2.0mm	
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs		
MIS45R4 610 20 HDG	100	600	3.05	1		
MIS45R4 615 20 HDG	150	600	3.24	1		
MIS45R4 620 20 HDG	200	600	3.42	1		
MIS45R4 625 20 HDG	250	600	3.60	1		
MIS45R4 630 20 HDG	300	600	3.79	1		
MIS45R4 640 20 HDG	400	600	4.15	1		
MIS45R4 645 20 HDG	450	600	4.34	1		
MIS45R4 650 20 HDG	500	600	4.52	1		
MIS45R4 660 20 HDG	600	600	4.89	1		
MIS45R4 670 20 HDG	700	600	5.26	1		
MIS45R4 675 20 HDG	750	600	5.44	1		
MIS45R4 680 20 HDG	800	600	5.62	1		
MIS45R4 690 20 HDG	900	600	5.99	1		
MIS45R4 600 20 HDG	1000	600	6.36	1		
MIS45R4 602 20 HDG	1200	600	7.09	1		

MIS45R3 H60 HDG

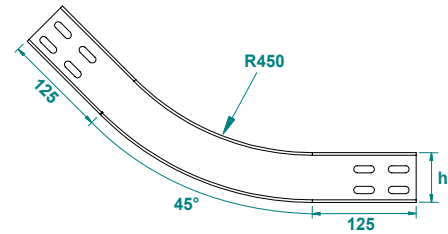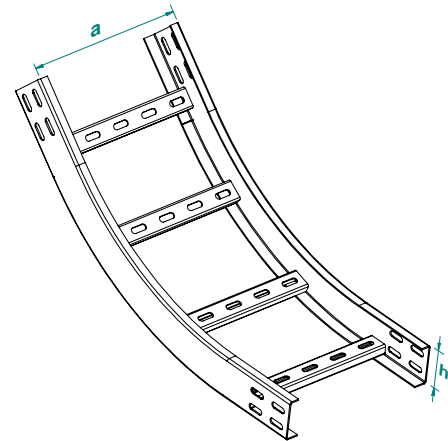

MIS45R4 H60 HDG

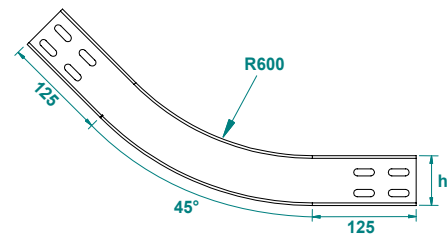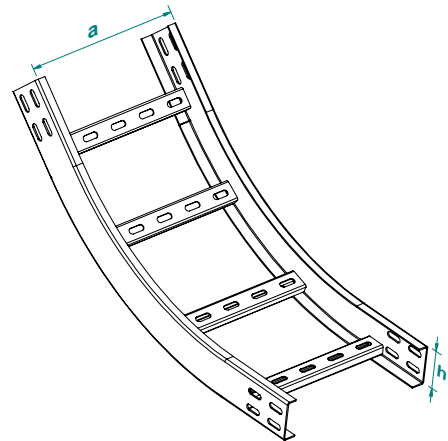

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method

to TS-EN 10346:2011 (PG)

SS- stainless steel AISI 304L and AISI 316L (SS)

EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0

Cable Ladder Systems of Side Height 60



MTK
MADE IN TURKEY

Vertical 30° Inside Bend of Cable Ladder (stable)

30° Dikey Merdiven İç Bükey Elemanı-(Sabit) - Арка фиксированная кабельроста, внутренняя 30°



Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized

MIS30... H60		1.5mm	
CODE	Width a=b mm	Radius R mm	kg 1pc
MIS30 610 15 HDG	100	150	0.84
MIS30 615 15 HDG	150	150	0.92
MIS30 620 15 HDG	200	150	1.01
MIS30 625 15 HDG	250	150	1.09
MIS30 630 15 HDG	300	150	1.17
MIS30 640 15 HDG	400	150	1.34
MIS30 645 15 HDG	450	150	1.42
MIS30 650 15 HDG	500	150	1.50
MIS30 660 15 HDG	600	150	1.67
MIS30 670 15 HDG	700	150	1.83
MIS30 675 15 HDG	750	150	1.91
MIS30 680 15 HDG	800	150	1.99
MIS30 690 15 HDG	900	150	2.16
MIS30 600 15 HDG	1000	150	2.32
MIS30 602 15 HDG	1200	150	2.65

MIS30... H60		2.0mm	
CODE	Width a=b mm	Radius R mm	kg 1pc
MIS30 610 20 HDG	100	150	1.12
MIS30 615 20 HDG	150	150	1.23
MIS30 620 20 HDG	200	150	1.34
MIS30 625 20 HDG	250	150	1.45
MIS30 630 20 HDG	300	150	1.56
MIS30 640 20 HDG	400	150	1.78
MIS30 645 20 HDG	450	150	1.89
MIS30 650 20 HDG	500	150	2.00
MIS30 660 20 HDG	600	150	2.22
MIS30 670 20 HDG	700	150	2.44
MIS30 675 20 HDG	750	150	2.55
MIS30 680 20 HDG	800	150	2.66
MIS30 690 20 HDG	900	150	2.88
MIS30 600 20 HDG	1000	150	3.10
MIS30 602 20 HDG	1200	150	3.54

Vertical 30° Inside Bend of Cable Ladder (stable) Radius:300

30° Dikey Merdiven İç Bükey Elemanı-(Sabit) Radyus:300 - Арка фиксированная кабельроста, внутренняя 30° радиус:300



Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized



MIS30R2... H60		1.5mm	
CODE	Width a=b mm	Radius R mm	kg 1pc
MIS30R2 610 15 HDG	100	300	1.15
MIS30R2 615 15 HDG	150	300	1.24
MIS30R2 620 15 HDG	200	300	1.33
MIS30R2 625 15 HDG	250	300	1.42
MIS30R2 630 15 HDG	300	300	1.52
MIS30R2 640 15 HDG	400	300	1.70
MIS30R2 645 15 HDG	450	300	1.79
MIS30R2 650 15 HDG	500	300	1.88
MIS30R2 660 15 HDG	600	300	2.07
MIS30R2 670 15 HDG	700	300	2.25
MIS30R2 675 15 HDG	750	300	2.34
MIS30R2 680 15 HDG	800	300	2.43
MIS30R2 690 15 HDG	900	300	2.62
MIS30R2 600 15 HDG	1000	300	2.80
MIS30R2 602 15 HDG	1200	300	3.17

MIS30R2... H60		2.0mm	
CODE	Width a=b mm	Radius R mm	kg 1pc
MIS30R2 610 20 HDG	100	300	1.53
MIS30R2 615 20 HDG	150	300	1.65
MIS30R2 620 20 HDG	200	300	1.77
MIS30R2 625 20 HDG	250	300	1.90
MIS30R2 630 20 HDG	300	300	2.02
MIS30R2 640 20 HDG	400	300	2.26
MIS30R2 645 20 HDG	450	300	2.39
MIS30R2 650 20 HDG	500	300	2.51
MIS30R2 660 20 HDG	600	300	2.75
MIS30R2 670 20 HDG	700	300	3.00
MIS30R2 675 20 HDG	750	300	3.12
MIS30R2 680 20 HDG	800	300	3.24
MIS30R2 690 20 HDG	900	300	3.49
MIS30R2 600 20 HDG	1000	300	3.73
MIS30R2 602 20 HDG	1200	300	4.22

MIS30 H50 HDG

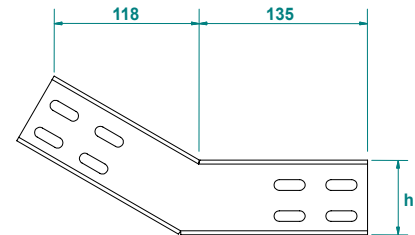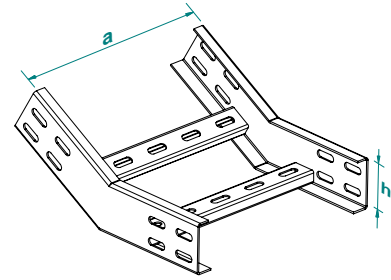

MIS30R2 H60 HDG

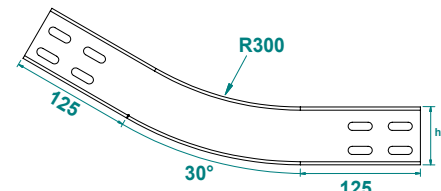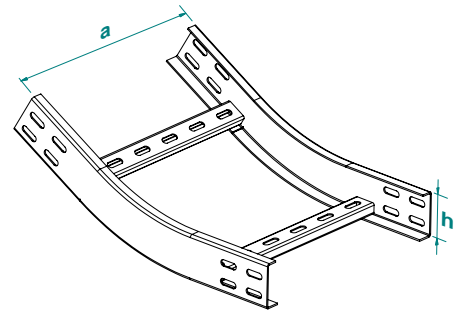

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method
to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0

Cable Ladder Systems of Side Height 60



Vertical 30° Inside Bend of Cable Ladder (stable) Radius:450

30° Dikey Merdiven İç Bükey Elemanı-(Sabit) Radyus:450 - Арка фиксированная кабельроста, внутренняя 30° радиус:450



Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized

MIS30R3... H60		1.5mm	
CODE	Width a=b mm	Radius R mm	kg 1pc
MIS30R3 610 15 HDG	100	450	1.10
MIS30R3 615 15 HDG	150	450	1.20
MIS30R3 620 15 HDG	200	450	1.29
MIS30R3 625 15 HDG	250	450	1.38
MIS30R3 630 15 HDG	300	450	1.47
MIS30R3 640 15 HDG	400	450	1.65
MIS30R3 645 15 HDG	450	450	1.75
MIS30R3 650 15 HDG	500	450	1.84
MIS30R3 660 15 HDG	600	450	2.02
MIS30R3 670 15 HDG	700	450	2.21
MIS30R3 675 15 HDG	750	450	2.30
MIS30R3 680 15 HDG	800	450	2.39
MIS30R3 690 15 HDG	900	450	2.57
MIS30R3 600 15 HDG	1000	450	2.76
MIS30R3 602 15 HDG	1200	450	3.12

MIS30R3... H60		2.0mm	
CODE	Width a=b mm	Radius R mm	kg 1pc
MIS30R3 610 20 HDG	100	450	1.47
MIS30R3 615 20 HDG	150	450	1.59
MIS30R3 620 20 HDG	200	450	1.71
MIS30R3 625 20 HDG	250	450	1.84
MIS30R3 630 20 HDG	300	450	1.96
MIS30R3 640 20 HDG	400	450	2.20
MIS30R3 645 20 HDG	450	450	2.33
MIS30R3 650 20 HDG	500	450	2.45
MIS30R3 660 20 HDG	600	450	2.69
MIS30R3 670 20 HDG	700	450	2.94
MIS30R3 675 20 HDG	750	450	3.06
MIS30R3 680 20 HDG	800	450	3.18
MIS30R3 690 20 HDG	900	450	3.43
MIS30R3 600 20 HDG	1000	450	3.67
MIS30R3 602 20 HDG	1200	450	4.16

Vertical 30° Inside Bend of Cable Ladder (stable) Radius:600

30° Dikey Merdiven İç Bükey Elemanı-(Sabit) Radyus:600 - Арка фиксированная кабельроста, внутренняя 30° радиус:600



Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized



MIS30R4... H60		1.5mm	
CODE	Width a=b mm	Radius R mm	kg 1pc
MIS30R4 610 15 HDG	100	600	1.48
MIS30R4 615 15 HDG	150	600	1.62
MIS30R4 620 15 HDG	200	600	1.76
MIS30R4 625 15 HDG	250	600	1.89
MIS30R4 630 15 HDG	300	600	2.03
MIS30R4 640 15 HDG	400	600	2.31
MIS30R4 645 15 HDG	450	600	2.44
MIS30R4 650 15 HDG	500	600	2.58
MIS30R4 660 15 HDG	600	600	2.86
MIS30R4 670 15 HDG	700	600	3.13
MIS30R4 675 15 HDG	750	600	3.27
MIS30R4 680 15 HDG	800	600	3.41
MIS30R4 690 15 HDG	900	600	3.68
MIS30R4 600 15 HDG	1000	600	3.96
MIS30R4 602 15 HDG	1200	600	4.51

MIS30R4... H60		2.0mm	
CODE	Width a=b mm	Radius R mm	kg 1pc
MIS30R4 610 20 HDG	100	600	1.97
MIS30R4 615 20 HDG	150	600	2.16
MIS30R4 620 20 HDG	200	600	2.34
MIS30R4 625 20 HDG	250	600	2.52
MIS30R4 630 20 HDG	300	600	2.71
MIS30R4 640 20 HDG	400	600	3.07
MIS30R4 645 20 HDG	450	600	3.26
MIS30R4 650 20 HDG	500	600	3.44
MIS30R4 660 20 HDG	600	600	3.81
MIS30R4 670 20 HDG	700	600	4.18
MIS30R4 675 20 HDG	750	600	4.36
MIS30R4 680 20 HDG	800	600	4.54
MIS30R4 690 20 HDG	900	600	4.91
MIS30R4 600 20 HDG	1000	600	5.28
MIS30R4 602 20 HDG	1200	600	6.01

MIS30R3 H60 HDG

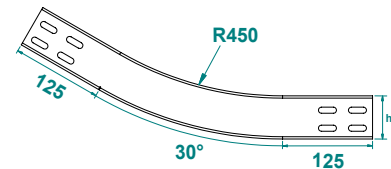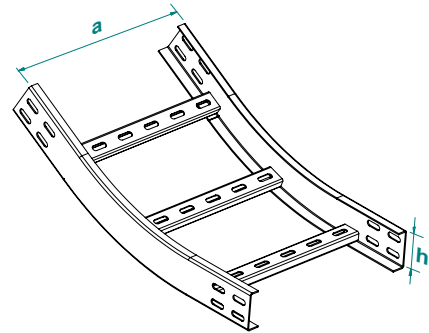

MIS30R4 H60 HDG

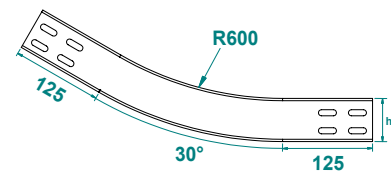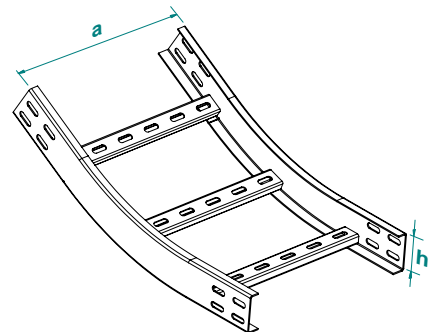

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0

Cable Ladder Systems of Side Height 60



MTK
MADE IN TURKEY

Vertical 90° Outside Bend of Cable Ladder (stable)

90° Dikey Merdiven Dış Bükey Elemanı-(Sabit) - Арка фиксированная кабельроста, внешняя 90°



Hot-Dip Galvanized

MDS... H60		1.5mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
MDS 610 15 HDG	100	150	1.48	1	
MDS 615 15 HDG	150	150	1.61	1	
MDS 620 15 HDG	200	150	1.73	1	
MDS 625 15 HDG	250	150	1.85	1	
MDS 630 15 HDG	300	150	1.98	1	
MDS 640 15 HDG	400	150	2.22	1	
MDS 645 15 HDG	450	150	2.35	1	
MDS 650 15 HDG	500	150	2.47	1	
MDS 660 15 HDG	600	150	2.72	1	
MDS 670 15 HDG	700	150	2.97	1	
MDS 675 15 HDG	750	150	3.09	1	
MDS 680 15 HDG	800	150	3.21	1	
MDS 690 15 HDG	900	150	3.46	1	
MDS 600 15 HDG	1000	150	3.71	1	
MDS 602 15 HDG	1200	150	4.20	1	

Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

MDS... H60		2.0mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
MDS 610 20 HDG	100	150	1.98	1	
MDS 615 20 HDG	150	150	2.14	1	
MDS 620 20 HDG	200	150	2.31	1	
MDS 625 20 HDG	250	150	2.47	1	
MDS 630 20 HDG	300	150	2.63	1	
MDS 640 20 HDG	400	150	2.96	1	
MDS 645 20 HDG	450	150	3.13	1	
MDS 650 20 HDG	500	150	3.29	1	
MDS 660 20 HDG	600	150	3.62	1	
MDS 670 20 HDG	700	150	3.95	1	
MDS 675 20 HDG	750	150	4.12	1	
MDS 680 20 HDG	800	150	4.28	1	
MDS 690 20 HDG	900	150	4.61	1	
MDS 600 20 HDG	1000	150	4.94	1	
MDS 602 20 HDG	1200	150	5.60	1	

Vertical 90° Outside Bend of Cable Ladder (stable) Radius:300

90° Dikey Merdiven Dış Bükey Elemanı-(Sabit) Radyus:300 - Арка фиксированная кабельроста, внешняя 90° радиус:300



Hot-Dip Galvanized



MDSR2... H60		1.5mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
MDSR2 610 15 HDG	100	300	2.68	1	
MDSR2 615 15 HDG	150	300	2.82	1	
MDSR2 620 15 HDG	200	300	2.96	1	
MDSR2 625 15 HDG	250	300	3.09	1	
MDSR2 630 15 HDG	300	300	3.23	1	
MDSR2 640 15 HDG	400	300	3.51	1	
MDSR2 645 15 HDG	450	300	3.64	1	
MDSR2 650 15 HDG	500	300	3.78	1	
MDSR2 660 15 HDG	600	300	4.06	1	
MDSR2 670 15 HDG	700	300	4.33	1	
MDSR2 675 15 HDG	750	300	4.47	1	
MDSR2 680 15 HDG	800	300	4.61	1	
MDSR2 690 15 HDG	900	300	4.88	1	
MDSR2 600 15 HDG	1000	300	5.16	1	
MDSR2 602 15 HDG	1200	300	5.71	1	

Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

MDSR2... H60		2.0mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
MDSR2 610 20 HDG	100	300	3.57	1	
MDSR2 615 20 HDG	150	300	3.76	1	
MDSR2 620 20 HDG	200	300	3.94	1	
MDSR2 625 20 HDG	250	300	4.12	1	
MDSR2 630 20 HDG	300	300	4.31	1	
MDSR2 640 20 HDG	400	300	4.67	1	
MDSR2 645 20 HDG	450	300	4.86	1	
MDSR2 650 20 HDG	500	300	5.04	1	
MDSR2 660 20 HDG	600	300	5.41	1	
MDSR2 670 20 HDG	700	300	5.78	1	
MDSR2 675 20 HDG	750	300	5.96	1	
MDSR2 680 20 HDG	800	300	6.14	1	
MDSR2 690 20 HDG	900	300	6.51	1	
MDSR2 600 20 HDG	1000	300	6.88	1	
MDSR2 602 20 HDG	1200	300	7.61	1	

MDS H60 HDG



MDSR2 H60 HDG

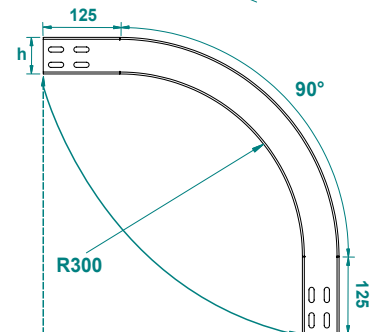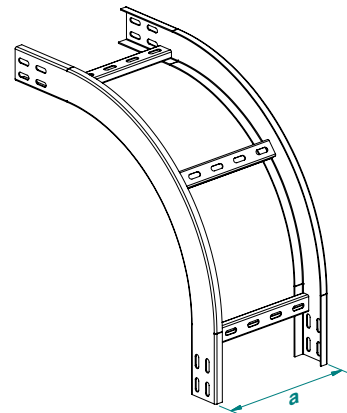

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0

Cable Ladder Systems of Side Height 60



MTK
MADE IN TURKEY

Vertical 90° Outside Bend of Cable Ladder (stable) Radius:450

90° Dikey Merdiven Dış Bükey Elemanı-(Sabit) Radyus:450 - Арка фиксированная кабельроста, внешняя 90° радиус:450



Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized

MDSR3... H60					1.5mm
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
MDSR3 610 15 HDG	100	450	3.17	1	
MDSR3 615 15 HDG	150	450	3.86	1	
MDSR3 620 15 HDG	200	450	4.04	1	
MDSR3 625 15 HDG	250	450	4.22	1	
MDSR3 630 15 HDG	300	450	4.41	1	
MDSR3 640 15 HDG	400	450	4.77	1	
MDSR3 645 15 HDG	450	450	4.96	1	
MDSR3 650 15 HDG	500	450	5.14	1	
MDSR3 660 15 HDG	600	450	5.51	1	
MDSR3 670 15 HDG	700	450	5.88	1	
MDSR3 675 15 HDG	750	450	6.06	1	
MDSR3 680 15 HDG	800	450	6.24	1	
MDSR3 690 15 HDG	900	450	6.61	1	
MDSR3 600 15 HDG	1000	450	6.98	1	
MDSR3 602 15 HDG	1200	450	7.71	1	

MDSR3... H60					2.0mm
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
MDSR3 610 20 HDG	100	450	4.89	1	
MDSR3 615 20 HDG	150	450	5.14	1	
MDSR3 620 20 HDG	200	450	5.38	1	
MDSR3 625 20 HDG	250	450	5.63	1	
MDSR3 630 20 HDG	300	450	5.87	1	
MDSR3 640 20 HDG	400	450	6.36	1	
MDSR3 645 20 HDG	450	450	6.61	1	
MDSR3 650 20 HDG	500	450	6.85	1	
MDSR3 660 20 HDG	600	450	7.34	1	
MDSR3 670 20 HDG	700	450	7.83	1	
MDSR3 675 20 HDG	750	450	8.08	1	
MDSR3 680 20 HDG	800	450	8.32	1	
MDSR3 690 20 HDG	900	450	8.81	1	
MDSR3 600 20 HDG	1000	450	9.30	1	
MDSR3 602 20 HDG	1200	450	10.28	1	

Vertical 90° Outside Bend of Cable Ladder (stable) Radius:600

90° Dikey Merdiven Dış Bükey Elemanı-(Sabit) Radyus:600 - Арка фиксированная кабельроста, внешняя 90° радиус:600



Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized


MDSR4... H60					1.5mm
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
MDSR4 610 15 HDG	100	600	4.66	1	
MDSR4 615 15 HDG	150	600	4.89	1	
MDSR4 620 15 HDG	200	600	5.12	1	
MDSR4 625 15 HDG	250	600	5.35	1	
MDSR4 630 15 HDG	300	600	5.58	1	
MDSR4 640 15 HDG	400	600	6.04	1	
MDSR4 645 15 HDG	450	600	6.27	1	
MDSR4 650 15 HDG	500	600	6.50	1	
MDSR4 660 15 HDG	600	600	6.96	1	
MDSR4 670 15 HDG	700	600	7.42	1	
MDSR4 675 15 HDG	750	600	7.65	1	
MDSR4 680 15 HDG	800	600	7.88	1	
MDSR4 690 15 HDG	900	600	8.34	1	
MDSR4 600 15 HDG	1000	600	8.80	1	
MDSR4 602 15 HDG	1200	600	9.72	1	

MDSR4... H60					2.0mm
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
MDSR4 610 20 HDG	100	600	6.22	1	
MDSR4 615 20 HDG	150	600	6.52	1	
MDSR4 620 20 HDG	200	600	6.83	1	
MDSR4 625 20 HDG	250	600	7.14	1	
MDSR4 630 20 HDG	300	600	7.44	1	
MDSR4 640 20 HDG	400	600	8.05	1	
MDSR4 645 20 HDG	450	600	8.36	1	
MDSR4 650 20 HDG	500	600	8.67	1	
MDSR4 660 20 HDG	600	600	9.28	1	
MDSR4 670 20 HDG	700	600	9.89	1	
MDSR4 675 20 HDG	750	600	10.20	1	
MDSR4 680 20 HDG	800	600	10.50	1	
MDSR4 690 20 HDG	900	600	11.12	1	
MDSR4 600 20 HDG	1000	600	11.73	1	
MDSR4 602 20 HDG	1200	600	12.95	1	

MDSR3 H60 HDG

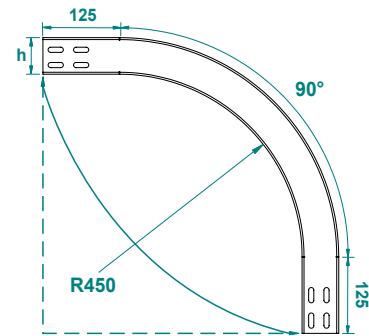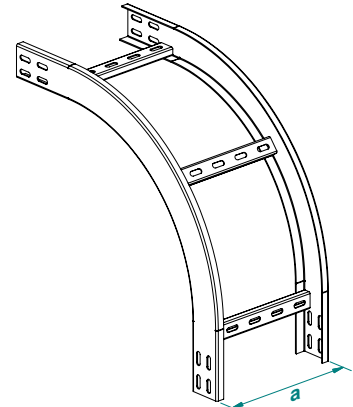

MDSR4 H60 HDG

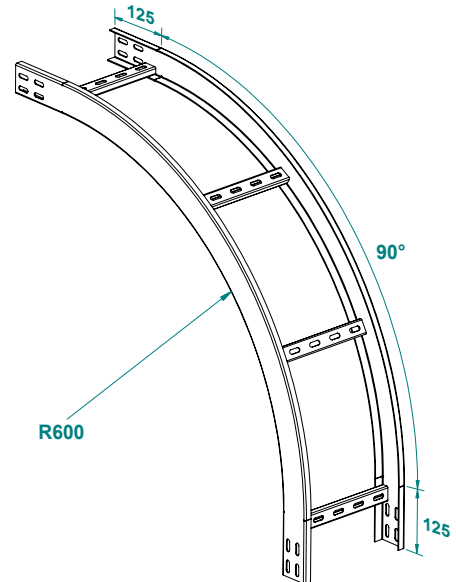

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method
to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: **1.5 2.0**

Cable Ladder Systems of Side Height 60



MTK
MADE IN TURKEY

Vertical 60° Outside Bend of Cable Ladder (stable)

60° Dikey Merdiven Dış Bükey Elemanı-(Sabit) - Арка фиксированная кабельроста, внешняя 60°



Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized

MDS60... H60		1.5mm	
CODE	Width a=b mm	Radius R mm	kg 1pc
MDS60 610 15 HDG	100	150	1.37
MDS60 615 15 HDG	150	150	1.49
MDS60 620 15 HDG	200	150	1.62
MDS60 625 15 HDG	250	150	1.74
MDS60 630 15 HDG	300	150	1.87
MDS60 640 15 HDG	400	150	2.11
MDS60 645 15 HDG	450	150	2.24
MDS60 650 15 HDG	500	150	2.36
MDS60 660 15 HDG	600	150	2.61
MDS60 670 15 HDG	700	150	2.85
MDS60 675 15 HDG	750	150	2.98
MDS60 680 15 HDG	800	150	3.10
MDS60 690 15 HDG	900	150	3.35
MDS60 600 15 HDG	1000	150	3.60
MDS60 602 15 HDG	1200	150	4.09

MDS60... H60		2.0mm	
CODE	Width a=b mm	Radius R mm	kg 1pc
MDS60 610 20 HDG	100	150	1.83
MDS60 615 20 HDG	150	150	1.99
MDS60 620 20 HDG	200	150	2.16
MDS60 625 20 HDG	250	150	2.32
MDS60 630 20 HDG	300	150	2.49
MDS60 640 20 HDG	400	150	2.82
MDS60 645 20 HDG	450	150	2.98
MDS60 650 20 HDG	500	150	3.14
MDS60 660 20 HDG	600	150	3.47
MDS60 670 20 HDG	700	150	3.80
MDS60 675 20 HDG	750	150	3.97
MDS60 680 20 HDG	800	150	4.13
MDS60 690 20 HDG	900	150	4.46
MDS60 600 20 HDG	1000	150	4.79
MDS60 602 20 HDG	1200	150	5.45

Vertical 60° Outside Bend of Cable Ladder (stable) Radius:300

60° Dikey Merdiven Dış Bükey Elemanı-(Sabit) Radyus:300 - Арка фиксированная кабельроста, внешняя 60° радиус:300



Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized



MDS60R2... H60		1.5mm	
CODE	Width a=b mm	Radius R mm	kg 1pc
MDS60R2 610 15 HDG	100	300	2.20
MDS60R2 615 15 HDG	150	300	2.34
MDS60R2 620 15 HDG	200	300	2.48
MDS60R2 625 15 HDG	250	300	2.61
MDS60R2 630 15 HDG	300	300	2.75
MDS60R2 640 15 HDG	400	300	3.03
MDS60R2 645 15 HDG	450	300	3.16
MDS60R2 650 15 HDG	500	300	3.30
MDS60R2 660 15 HDG	600	300	3.58
MDS60R2 670 15 HDG	700	300	3.85
MDS60R2 675 15 HDG	750	300	3.99
MDS60R2 680 15 HDG	800	300	4.13
MDS60R2 690 15 HDG	900	300	4.40
MDS60R2 600 15 HDG	1000	300	4.68
MDS60R2 602 15 HDG	1200	300	5.23

MDS60R2... H60		2.0mm	
CODE	Width a=b mm	Radius R mm	kg 1pc
MDS60R2 610 20 HDG	100	300	2.93
MDS60R2 615 20 HDG	150	300	3.12
MDS60R2 620 20 HDG	200	300	3.30
MDS60R2 625 20 HDG	250	300	3.48
MDS60R2 630 20 HDG	300	300	3.67
MDS60R2 640 20 HDG	400	300	4.03
MDS60R2 645 20 HDG	450	300	4.22
MDS60R2 650 20 HDG	500	300	4.40
MDS60R2 660 20 HDG	600	300	4.77
MDS60R2 670 20 HDG	700	300	5.14
MDS60R2 675 20 HDG	750	300	5.32
MDS60R2 680 20 HDG	800	300	5.50
MDS60R2 690 20 HDG	900	300	5.87
MDS60R2 600 20 HDG	1000	300	6.24
MDS60R2 602 20 HDG	1200	300	6.97

MDS60 H60 HDG

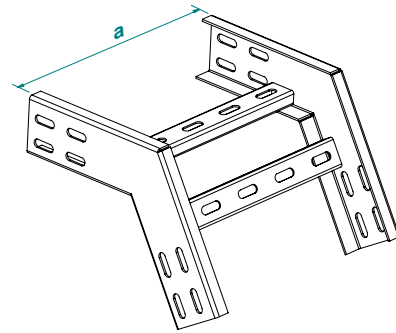

MDS60R2 H60 HDG

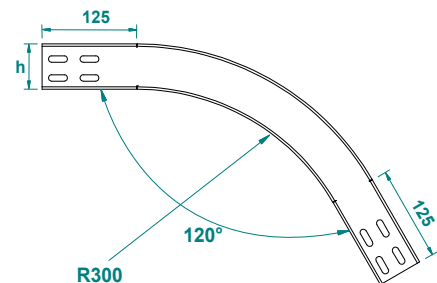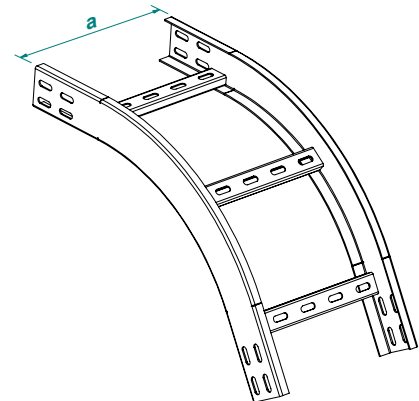

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0

Cable Ladder Systems of Side Height 60



MTK
MADE IN TURKEY

Vertical 60° Outside Bend of Cable Ladder (stable) Radius:450

90° Dikey Merdiven Dış Bükey Elemanı-(Sabit) Radyus:450 - Арка фиксированная кабельроста, внешняя 90° радиус:450



Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized

MDS60R3... H60		1.5mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
MDS60R3 610 15 HDG	100	450	2.79	1	
MDS60R3 615 15 HDG	150	450	2.92	1	
MDS60R3 620 15 HDG	200	450	3.06	1	
MDS60R3 625 15 HDG	250	450	3.20	1	
MDS60R3 630 15 HDG	300	450	3.34	1	
MDS60R3 640 15 HDG	400	450	3.61	1	
MDS60R3 645 15 HDG	450	450	3.75	1	
MDS60R3 650 15 HDG	500	450	3.89	1	
MDS60R3 660 15 HDG	600	450	4.16	1	
MDS60R3 670 15 HDG	700	450	4.44	1	
MDS60R2 675 15 HDG	750	450	4.58	1	
MDS60R2 680 15 HDG	800	450	4.71	1	
MDS60R2 690 15 HDG	900	450	4.99	1	
MDS60R2 600 15 HDG	1000	450	5.27	1	
MDS60R2 602 15 HDG	1200	450	5.82	1	

MDS60R3... H60		2.0mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
MDS60R3 610 20 HDG	100	450	3.71	1	
MDS60R3 615 20 HDG	150	450	3.90	1	
MDS60R3 620 20 HDG	200	450	4.08	1	
MDS60R3 625 20 HDG	250	450	4.26	1	
MDS60R3 630 20 HDG	300	450	4.45	1	
MDS60R3 640 20 HDG	400	450	4.81	1	
MDS60R3 645 20 HDG	450	450	5.00	1	
MDS60R3 650 20 HDG	500	450	5.18	1	
MDS60R3 660 20 HDG	600	450	5.55	1	
MDS60R3 670 20 HDG	700	450	5.92	1	
MDS60R2 675 20 HDG	750	450	6.10	1	
MDS60R2 680 20 HDG	800	450	6.28	1	
MDS60R2 690 20 HDG	900	450	6.65	1	
MDS60R2 600 20 HDG	1000	450	7.02	1	
MDS60R2 602 20 HDG	1200	450	7.75	1	

Vertical 60° Outside Bend of Cable Ladder (stable) Radius:600

60° Dikey Merdiven Dış Bükey Elemanı-(Sabit) Radyus:600 - Арка фиксированная кабельроста, внешняя 90° радиус:600



Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized


MDS60R4... H60		1.5mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
MDS60R4 610 15 HDG	100	600	3.48	1	
MDS60R4 615 15 HDG	150	600	3.66	1	
MDS60R4 620 15 HDG	200	600	3.84	1	
MDS60R4 625 15 HDG	250	600	4.03	1	
MDS60R4 630 15 HDG	300	600	4.21	1	
MDS60R4 640 15 HDG	400	600	4.58	1	
MDS60R4 645 15 HDG	450	600	4.76	1	
MDS60R4 650 15 HDG	500	600	4.95	1	
MDS60R4 660 15 HDG	600	600	5.31	1	
MDS60R4 670 15 HDG	700	600	5.68	1	
MDS60R4 675 15 HDG	750	600	5.87	1	
MDS60R4 680 15 HDG	800	600	6.05	1	
MDS60R4 690 15 HDG	900	600	6.42	1	
MDS60R4 600 15 HDG	1000	600	6.78	1	
MDS60R4 602 15 HDG	1200	600	7.52	1	

MDS60R4... H60		2.0mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
MDS60R4 610 20 HDG	100	600	4.63	1	
MDS60R4 615 20 HDG	150	600	4.88	1	
MDS60R4 620 20 HDG	200	600	5.12	1	
MDS60R4 625 20 HDG	250	600	5.37	1	
MDS60R4 630 20 HDG	300	600	5.61	1	
MDS60R4 640 20 HDG	400	600	6.10	1	
MDS60R4 645 20 HDG	450	600	6.35	1	
MDS60R4 650 20 HDG	500	600	6.59	1	
MDS60R4 660 20 HDG	600	600	7.08	1	
MDS60R4 670 20 HDG	700	600	7.57	1	
MDS60R4 675 20 HDG	750	600	7.82	1	
MDS60R4 680 20 HDG	800	600	8.06	1	
MDS60R4 690 20 HDG	900	600	8.55	1	
MDS60R4 600 20 HDG	1000	600	9.04	1	
MDS60R4 602 20 HDG	1200	600	10.02	1	

MDS60R3 H60 HDG

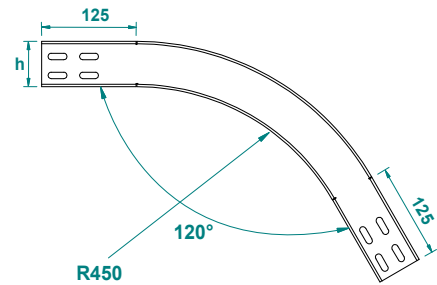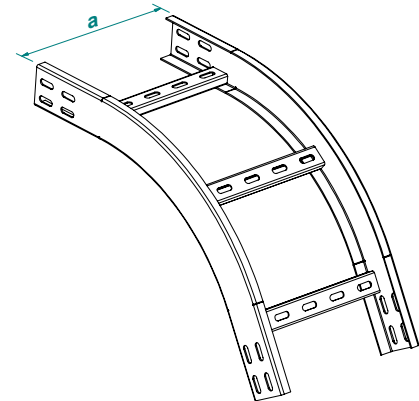

MDS60R4 H60 HDG

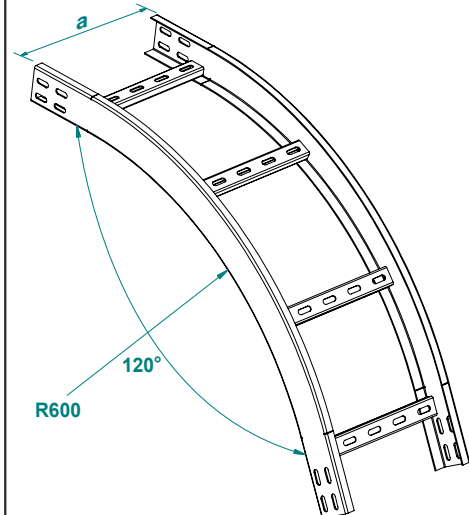

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: **1.5 2.0**

Cable Ladder Systems of Side Height 60



MTK
MADE IN TURKEY

Vertical 45° Outside Bend of Cable Ladder (stable)

45° Dikey Merdiven Dış Bükey Elemanı-(Sabit) - Арка фиксированная кабельроста, внешняя 45°



Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized

MDS45... H60		1.5mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
MDS45 610 15 HDG	100	150	0.84	1	
MDS45 615 15 HDG	150	150	0.92	1	
MDS45 620 15 HDG	200	150	1.01	1	
MDS45 625 15 HDG	250	150	1.09	1	
MDS45 630 15 HDG	300	150	1.17	1	
MDS45 640 15 HDG	400	150	1.34	1	
MDS45 645 15 HDG	450	150	1.42	1	
MDS45 650 15 HDG	500	150	1.50	1	
MDS45 660 15 HDG	600	150	1.67	1	
MDS45 670 15 HDG	700	150	1.83	1	
MDS45 675 15 HDG	750	150	1.91	1	
MDS45 680 15 HDG	800	150	1.99	1	
MDS45 690 15 HDG	900	150	2.16	1	
MDS45 600 15 HDG	1000	150	2.32	1	
MDS45 602 15 HDG	1200	150	2.65	1	

MDS45... H60		2.0mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
MDS45 610 20 HDG	100	150	1.12	1	
MDS45 615 20 HDG	150	150	1.23	1	
MDS45 620 20 HDG	200	150	1.34	1	
MDS45 625 20 HDG	250	150	1.45	1	
MDS45 630 20 HDG	300	150	1.56	1	
MDS45 640 20 HDG	400	150	1.78	1	
MDS45 645 20 HDG	450	150	1.89	1	
MDS45 650 20 HDG	500	150	2.00	1	
MDS45 660 20 HDG	600	150	2.22	1	
MDS45 670 20 HDG	700	150	2.44	1	
MDS45 675 20 HDG	750	150	2.55	1	
MDS45 680 20 HDG	800	150	2.66	1	
MDS45 690 20 HDG	900	150	2.88	1	
MDS45 600 20 HDG	1000	150	3.10	1	
MDS45 602 20 HDG	1200	150	3.54	1	

Vertical 45° Outside Bend of Cable Ladder (stable) Radius:300

45° Dikey Merdiven Dış Bükey Elemanı-(Sabit) Radyus:300 - Арка фиксированная кабельроста, внешняя 45° радиус:300



Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized



MDS45R2... H60		1.5mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
MDS45R2 610 15 HDG	100	300	1.63	1	
MDS45R2 615 15 HDG	150	300	1.72	1	
MDS45R2 620 15 HDG	200	300	1.81	1	
MDS45R2 625 15 HDG	250	300	1.90	1	
MDS45R2 630 15 HDG	300	300	2.00	1	
MDS45R2 640 15 HDG	400	300	2.18	1	
MDS45R2 645 15 HDG	450	300	2.27	1	
MDS45R2 650 15 HDG	500	300	2.36	1	
MDS45R2 660 15 HDG	600	300	2.55	1	
MDS45R2 670 15 HDG	700	300	2.73	1	
MDS45R2 675 15 HDG	750	300	2.82	1	
MDS45R2 680 15 HDG	800	300	2.91	1	
MDS45R2 690 15 HDG	900	300	3.10	1	
MDS45R2 600 15 HDG	1000	300	3.28	1	
MDS45R2 602 15 HDG	1200	300	3.65	1	

MDS45R2... H60		2.0mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
MDS45R2 610 20 HDG	100	300	2.17	1	
MDS45R2 615 20 HDG	150	300	2.29	1	
MDS45R2 620 20 HDG	200	300	2.41	1	
MDS45R2 625 20 HDG	250	300	2.54	1	
MDS45R2 630 20 HDG	300	300	2.66	1	
MDS45R2 640 20 HDG	400	300	2.90	1	
MDS45R2 645 20 HDG	450	300	3.03	1	
MDS45R2 650 20 HDG	500	300	3.15	1	
MDS45R2 660 20 HDG	600	300	3.39	1	
MDS45R2 670 20 HDG	700	300	3.64	1	
MDS45R2 675 20 HDG	750	300	3.76	1	
MDS45R2 680 20 HDG	800	300	3.88	1	
MDS45R2 690 20 HDG	900	300	4.13	1	
MDS45R2 600 20 HDG	1000	300	4.37	1	
MDS45R2 602 20 HDG	1200	300	4.86	1	

MDS45 H60 HDG

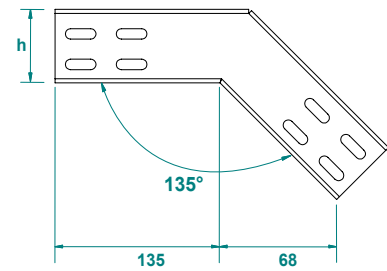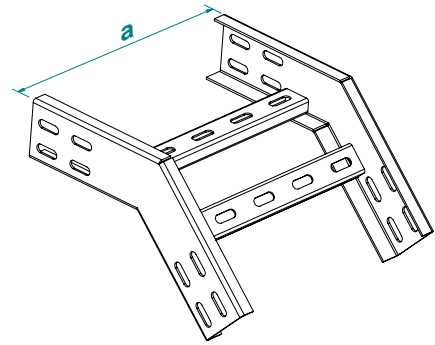

MDS45R2 H60 HDG

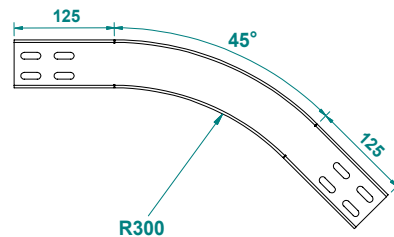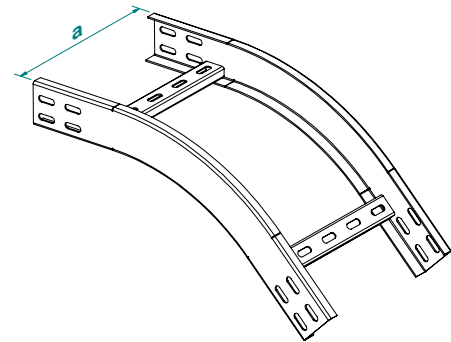

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method
to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0

Cable Ladder Systems of Side Height 60



MTK
MADE IN TURKEY

Vertical 45° Outside Bend of Cable Ladder (stable) Radius:450

45° Dikey Merdiven Dış Bükey Elemanı-(Sabit) -45° Dikey Merdiven Dış Bükey Elemanı-(Sabit) Radyus:450



Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized

MDS45R3... H60		1.5mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
MDS45R3 610 15 HDG	100	450	1.99	1	
MDS45R3 615 15 HDG	150	450	2.13	1	
MDS45R3 620 15 HDG	200	450	2.27	1	
MDS45R3 625 15 HDG	250	450	2.40	1	
MDS45R3 630 15 HDG	300	450	2.54	1	
MDS45R3 640 15 HDG	400	450	2.82	1	
MDS45R3 645 15 HDG	450	450	2.95	1	
MDS45R3 650 15 HDG	500	450	3.09	1	
MDS45R3 660 15 HDG	600	450	3.37	1	
MDS45R3 670 15 HDG	700	450	3.64	1	
MDS45R3 675 15 HDG	750	450	3.78	1	
MDS45R3 680 15 HDG	800	450	3.92	1	
MDS45R3 690 15 HDG	900	450	4.19	1	
MDS45R3 600 15 HDG	1000	450	4.47	1	
MDS45R3 602 15 HDG	1200	450	5.02	1	

MDS45R3... H60		2.0mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
MDS45R3 610 20 HDG	100	450	2.65	1	
MDS45R3 615 20 HDG	150	450	2.84	1	
MDS45R3 620 20 HDG	200	450	3.02	1	
MDS45R3 625 20 HDG	250	450	3.20	1	
MDS45R3 630 20 HDG	300	450	3.39	1	
MDS45R3 640 20 HDG	400	450	3.75	1	
MDS45R3 645 20 HDG	450	450	3.94	1	
MDS45R3 650 20 HDG	500	450	4.12	1	
MDS45R3 660 20 HDG	600	450	4.49	1	
MDS45R3 670 20 HDG	700	450	4.86	1	
MDS45R3 675 20 HDG	750	450	5.04	1	
MDS45R3 680 20 HDG	800	450	5.22	1	
MDS45R3 690 20 HDG	900	450	5.59	1	
MDS45R3 600 20 HDG	1000	450	5.96	1	
MDS45R3 602 20 HDG	1200	450	6.69	1	

Vertical 45° Outside Bend of Cable Ladder (stable) Radius:600

45° Dikey Merdiven Dış Bükey Elemanı-(Sabit) Radyus:600 - Арка фиксированная кабельроста, внешняя 45° радиус:600



Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized



MDS45R4... H60		1.5mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
MDS45R4 610 15 HDG	100	600	2.29	1	
MDS45R4 615 15 HDG	150	600	2.43	1	
MDS45R4 620 15 HDG	200	600	2.57	1	
MDS45R4 625 15 HDG	250	600	2.70	1	
MDS45R4 630 15 HDG	300	600	2.84	1	
MDS45R4 640 15 HDG	400	600	3.12	1	
MDS45R4 645 15 HDG	450	600	3.25	1	
MDS45R4 650 15 HDG	500	600	3.39	1	
MDS45R4 660 15 HDG	600	600	3.67	1	
MDS45R4 670 15 HDG	700	600	3.94	1	
MDS45R4 675 15 HDG	750	600	4.08	1	
MDS45R4 680 15 HDG	800	600	4.22	1	
MDS45R4 690 15 HDG	900	600	4.49	1	
MDS45R4 600 15 HDG	1000	600	4.77	1	
MDS45R4 602 15 HDG	1200	600	5.32	1	

MDS45R4... H60		2.0mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
MDS45R4 610 20 HDG	100	600	3.05	1	
MDS45R4 615 20 HDG	150	600	3.24	1	
MDS45R4 620 20 HDG	200	600	3.42	1	
MDS45R4 625 20 HDG	250	600	3.60	1	
MDS45R4 630 20 HDG	300	600	3.79	1	
MDS45R4 640 20 HDG	400	600	4.15	1	
MDS45R4 645 20 HDG	450	600	4.34	1	
MDS45R4 650 20 HDG	500	600	4.52	1	
MDS45R4 660 20 HDG	600	600	4.89	1	
MDS45R4 670 20 HDG	700	600	5.26	1	
MDS45R4 675 20 HDG	750	600	5.44	1	
MDS45R4 680 20 HDG	800	600	5.62	1	
MDS45R4 690 20 HDG	900	600	5.99	1	
MDS45R4 600 20 HDG	1000	600	6.36	1	
MDS45R4 602 20 HDG	1200	600	7.09	1	

MDS45R3 H60 HDG

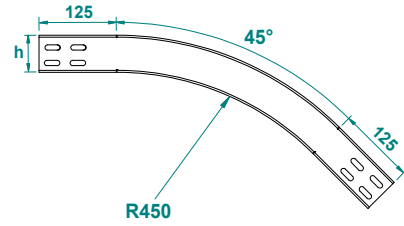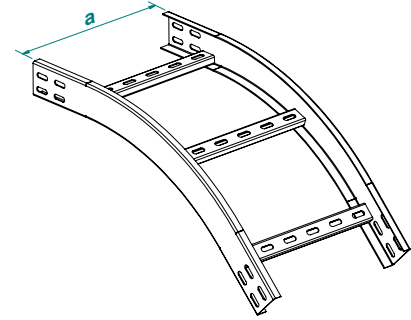

MDS45R4 H60 HDG

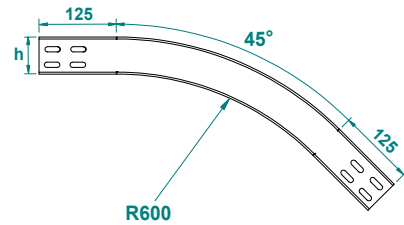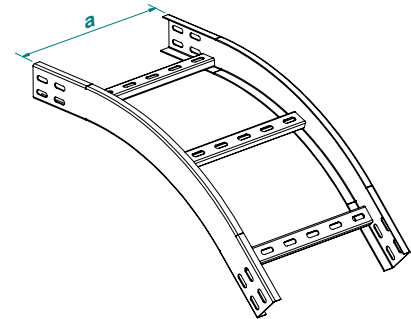

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method
to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0

Cable Ladder Systems of Side Height 60



MTK
MADE IN TURKEY

Vertical 30° Outside Bend of Cable Ladder (stable)

30° Dikey Merdiven Dış Bükey Elemanı-(Sabit) - Арка фиксированная кабельроста, внешняя 30°



Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized

MDS30... H60		1.5mm		
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs
MDS30 610 15 HDG	100	150	0.84	1
MDS30 615 15 HDG	150	150	0.92	1
MDS30 620 15 HDG	200	150	1.01	1
MDS30 625 15 HDG	250	150	1.09	1
MDS30 630 15 HDG	300	150	1.17	1
MDS30 640 15 HDG	400	150	1.34	1
MDS30 645 15 HDG	450	150	1.42	1
MDS30 650 15 HDG	500	150	1.50	1
MDS30 660 15 HDG	600	150	1.67	1
MDS30 670 15 HDG	700	150	1.83	1
MDS30 675 15 HDG	750	150	1.91	1
MDS30 680 15 HDG	800	150	1.99	1
MDS30 690 15 HDG	900	150	2.16	1
MDS30 600 15 HDG	1000	150	2.32	1
MDS30 602 15 HDG	1200	150	2.62	1

MDS30... H60		2.0mm		
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs
MDS30 610 20 HDG	100	150	1.12	1
MDS30 615 20 HDG	150	150	1.23	1
MDS30 620 20 HDG	200	150	1.34	1
MDS30 625 20 HDG	250	150	1.45	1
MDS30 630 20 HDG	300	150	1.56	1
MDS30 640 20 HDG	400	150	1.78	1
MDS30 645 20 HDG	450	150	1.89	1
MDS30 650 20 HDG	500	150	2.00	1
MDS30 660 20 HDG	600	150	2.22	1
MDS30 670 20 HDG	700	150	2.44	1
MDS30 675 20 HDG	750	150	2.55	1
MDS30 680 20 HDG	800	150	2.66	1
MDS30 690 20 HDG	900	150	2.88	1
MDS30 600 20 HDG	1000	150	3.10	1
MDS30 602 20 HDG	1200	150	3.54	1

Vertical 30° Outside Bend of Cable Ladder (stable) Radius:300

30° Dikey Merdiven Dış Bükey Elemanı-(Sabit) Radyus:300 - Арка фиксированная кабельроста, внешняя 30° радиус:300



Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized



MDS30R2... H60		1.5mm		
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs
MDS30R2 610 15 HDG	100	300	1.15	1
MDS30R2 615 15 HDG	150	300	1.24	1
MDS30R2 620 15 HDG	200	300	1.33	1
MDS30R2 625 15 HDG	250	300	1.42	1
MDS30R2 630 15 HDG	300	300	1.52	1
MDS30R2 640 15 HDG	400	300	1.70	1
MDS30R2 645 15 HDG	450	300	1.79	1
MDS30R2 650 15 HDG	500	300	1.88	1
MDS30R2 660 15 HDG	600	300	2.07	1
MDS30R2 670 15 HDG	700	300	2.25	1
MDS30R2 675 15 HDG	750	300	2.34	1
MDS30R2 680 15 HDG	800	300	2.43	1
MDS30R2 690 15 HDG	900	300	2.62	1
MDS30R2 600 15 HDG	1000	300	2.80	1
MDS30R2 602 15 HDG	1200	300	3.17	1

MDS30R2... H60		2.0mm		
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs
MDS30R2 610 20 HDG	100	300	1.53	1
MDS30R2 615 20 HDG	150	300	1.65	1
MDS30R2 620 20 HDG	200	300	1.77	1
MDS30R2 625 20 HDG	250	300	1.90	1
MDS30R2 630 20 HDG	300	300	2.02	1
MDS30R2 640 20 HDG	400	300	2.26	1
MDS30R2 645 20 HDG	450	300	2.39	1
MDS30R2 650 20 HDG	500	300	2.51	1
MDS30R2 660 20 HDG	600	300	2.75	1
MDS30R2 670 20 HDG	700	300	3.00	1
MDS30R2 675 20 HDG	750	300	3.12	1
MDS30R2 680 20 HDG	800	300	3.24	1
MDS30R2 690 20 HDG	900	300	3.49	1
MDS30R2 600 20 HDG	1000	300	3.73	1
MDS30R2 602 20 HDG	1200	300	4.22	1

MDS30 H60 HDG

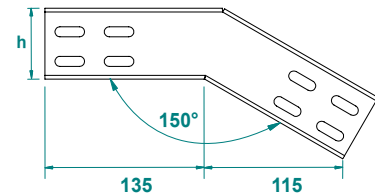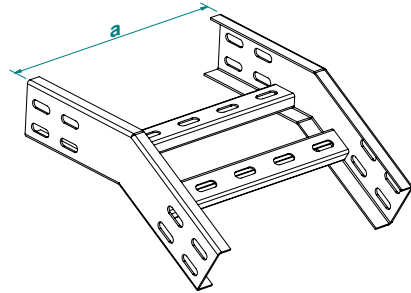

MDS30R2 H60 HDG

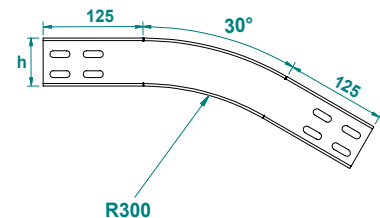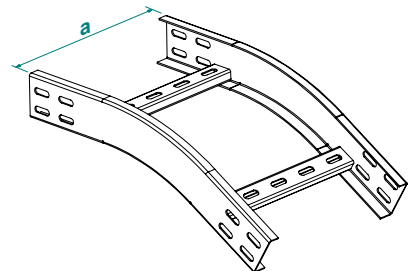

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method
to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0

Cable Ladder Systems of Side Height 60



MTK
MADE IN TURKEY

Vertical 30° Outside Bend of Cable Ladder (stable) Radius:450

30° Dikey Merdiven Dış Bükey Elemanı-(Sabit) Radyus:450 - Арка фиксированная кабельроста, внешняя 30° радиус:450



Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized

MDS30R3... H60		1.5mm		
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs
MDS30R3 610 15 HDG	100	450	1.10	1
MDS30R3 615 15 HDG	150	450	1.20	1
MDS30R3 620 15 HDG	200	450	1.29	1
MDS30R3 625 15 HDG	250	450	1.38	1
MDS30R3 630 15 HDG	300	450	1.47	1
MDS30R3 640 15 HDG	400	450	1.65	1
MDS30R3 645 15 HDG	450	450	1.75	1
MDS30R3 650 15 HDG	500	450	1.84	1
MDS30R3 660 15 HDG	600	450	2.02	1
MDS30R3 670 15 HDG	700	450	2.21	1
MDS30R3 675 15 HDG	750	450	2.30	1
MDS30R3 680 15 HDG	800	450	2.39	1
MDS30R3 690 15 HDG	900	450	2.57	1
MDS30R3 600 15 HDG	1000	450	2.76	1
MDS30R3 602 15 HDG	1200	450	3.12	1

MDS30R3... H60		2.0mm		
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs
MDS30R3 610 20 HDG	100	450	1.47	1
MDS30R3 615 20 HDG	150	450	1.59	1
MDS30R3 620 20 HDG	200	450	1.71	1
MDS30R3 625 20 HDG	250	450	1.84	1
MDS30R3 630 20 HDG	300	450	1.96	1
MDS30R3 640 20 HDG	400	450	2.20	1
MDS30R3 645 20 HDG	450	450	2.33	1
MDS30R3 650 20 HDG	500	450	2.45	1
MDS30R3 660 20 HDG	600	450	2.69	1
MDS30R3 670 20 HDG	700	450	2.94	1
MDS30R3 675 20 HDG	750	450	3.06	1
MDS30R3 680 20 HDG	800	450	3.18	1
MDS30R3 690 20 HDG	900	450	3.43	1
MDS30R3 600 20 HDG	1000	450	3.67	1
MDS30R3 602 20 HDG	1200	450	4.16	1

Vertical 30° Outside Bend of Cable Ladder (stable) Radius:600

30° Dikey Merdiven Dış Bükey Elemanı-(Sabit) Radyus:600 - Арка фиксированная кабельроста, внешняя 30° радиус:600



Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized



MDS30R4... H60		1.5mm		
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs
MDS30R4 610 15 HDG	100	600	1.20	1
MDS30R4 615 15 HDG	150	600	1.33	1
MDS30R4 620 15 HDG	200	600	1.47	1
MDS30R4 625 15 HDG	250	600	1.61	1
MDS30R4 630 15 HDG	300	600	1.75	1
MDS30R4 640 15 HDG	400	600	2.02	1
MDS30R4 645 15 HDG	450	600	2.16	1
MDS30R4 650 15 HDG	500	600	2.30	1
MDS30R4 660 15 HDG	600	600	2.57	1
MDS30R4 670 15 HDG	700	600	2.85	1
MDS30R4 675 15 HDG	750	600	2.99	1
MDS30R4 680 15 HDG	800	600	3.12	1
MDS30R4 690 15 HDG	900	600	3.40	1
MDS30R4 600 15 HDG	1000	600	3.68	1
MDS30R4 602 15 HDG	1200	600	4.23	1

MDS30R4... H60		2.0mm		
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs
MDS30R4 610 20 HDG	100	600	1.59	1
MDS30R4 615 20 HDG	150	600	1.78	1
MDS30R4 620 20 HDG	200	600	1.96	1
MDS30R4 625 20 HDG	250	600	2.14	1
MDS30R4 630 20 HDG	300	600	2.33	1
MDS30R4 640 20 HDG	400	600	2.69	1
MDS30R4 645 20 HDG	450	600	2.88	1
MDS30R4 650 20 HDG	500	600	3.06	1
MDS30R4 660 20 HDG	600	600	3.43	1
MDS30R4 670 20 HDG	700	600	3.80	1
MDS30R4 675 20 HDG	750	600	3.98	1
MDS30R4 680 20 HDG	800	600	4.16	1
MDS30R4 690 20 HDG	900	600	4.53	1
MDS30R4 600 20 HDG	1000	600	4.90	1
MDS30R4 602 20 HDG	1200	600	5.63	1

MDS30R3 H60 HDG

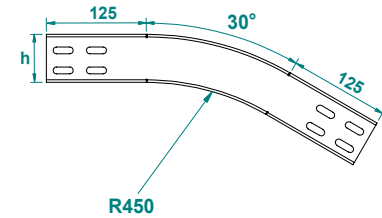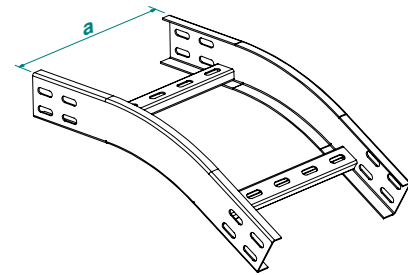

MDS30R4 H60 HDG

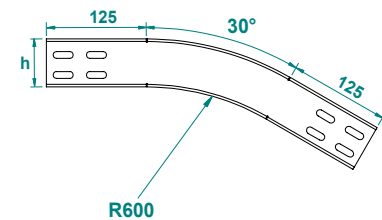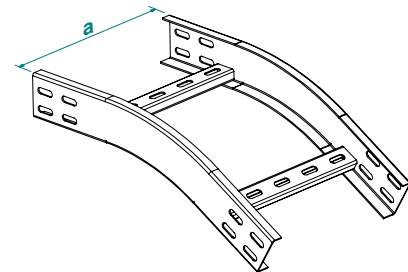

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method
to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: **1.5 2.0**

Cable Ladder Systems of Side Height 60



MTK
MADE IN TURKEY

Modular Inside - Outside Cable Ladder Bend

Modular Merdiven iniş - çıkış dönüşü - Шарнирная дуга кабельроста



MMD = 2 pc of MMB + 2 set of BDD
MMD = 2 ADET MMB + 2 Takım BDD'den oluşmaktadır.

Hot-Dip Galvanized

MMD... H60		1.5mm		kg 1pc	pcs
CODE	Width a=b mm	Radius R mm			
MMD 610 15 HDG	100	300	2.08	1	
MMD 615 15 HDG	150	300	2.16	1	
MMD 620 15 HDG	200	300	2.24	1	
MMD 625 15 HDG	250	300	2.32	1	
MMD 630 15 HDG	300	300	2.41	1	
MMD 640 15 HDG	400	300	2.57	1	
MMD 645 15 HDG	450	300	2.65	1	
MMD 650 15 HDG	500	300	2.74	1	
MMD 660 15 HDG	600	300	2.90	1	
MMD 670 15 HDG	700	300	3.07	1	
MMD 675 15 HDG	750	300	3.15	1	
MMD 680 15 HDG	800	300	3.23	1	
MMD 690 15 HDG	900	300	3.40	1	
MMD 600 15 HDG	1000	300	3.56	1	
MMD 602 15 HDG	1200	300	3.89	1	

MMD... H60		2.0mm		kg 1pc	pcs
CODE	Width a=b mm	Radius R mm			
MMD 610 20 HDG	100	300	2.77	1	
MMD 615 20 HDG	150	300	2.88	1	
MMD 620 20 HDG	200	300	2.99	1	
MMD 625 20 HDG	250	300	3.10	1	
MMD 630 20 HDG	300	300	3.21	1	
MMD 640 20 HDG	400	300	3.43	1	
MMD 645 20 HDG	450	300	3.54	1	
MMD 650 20 HDG	500	300	3.65	1	
MMD 660 20 HDG	600	300	3.87	1	
MMD 670 20 HDG	700	300	4.09	1	
MMD 675 20 HDG	750	300	4.20	1	
MMD 680 20 HDG	800	300	4.31	1	
MMD 690 20 HDG	900	300	4.53	1	
MMD 600 20 HDG	1000	300	4.75	1	
MMD 602 20 HDG	1200	300	5.19	1	

Modular Adjustable Cable Ladder Riser

Modular Merdiven iniş - çıkış elemanı - Шарнирный элемент дуги кабельроста



Important!


To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized


MMB... H60		1.5mm		kg 1pc	pcs
CODE	Width a=b mm				
MMB 610 15 HDG	100		0.76	1	
MMB 615 15 HDG	150		0.80	1	
MMB 620 15 HDG	200		0.84	1	
MMB 625 15 HDG	250		0.88	1	
MMB 630 15 HDG	300		0.92	1	
MMB 640 15 HDG	400		1.01	1	
MMB 645 15 HDG	450		1.05	1	
MMB 650 15 HDG	500		1.09	1	
MMB 660 15 HDG	600		1.17	1	
MMB 670 15 HDG	700		1.25	1	
MMB 675 15 HDG	750		1.29	1	
MMB 680 15 HDG	800		1.34	1	
MMB 690 15 HDG	900		1.42	1	
MMB 600 15 HDG	1000		1.50	1	
MMB 602 15 HDG	1200		1.67	1	

MMB... H60		2.0mm		kg 1pc	pcs
CODE	Width a=b mm				
MMB 610 20 HDG	100		1.01	1	
MMB 615 20 HDG	150		1.06	1	
MMB 620 20 HDG	200		1.12	1	
MMB 625 20 HDG	250		1.17	1	
MMB 630 20 HDG	300		1.23	1	
MMB 640 20 HDG	400		1.34	1	
MMB 645 20 HDG	450		1.39	1	
MMB 650 20 HDG	500		1.45	1	
MMB 660 20 HDG	600		1.56	1	
MMB 670 20 HDG	700		1.67	1	
MMB 675 20 HDG	750		1.72	1	
MMB 680 20 HDG	800		1.78	1	
MMB 690 20 HDG	900		1.89	1	
MMB 600 20 HDG	1000		2.00	1	
MMB 602 20 HDG	1200		2.22	1	

MMD H60 HDG

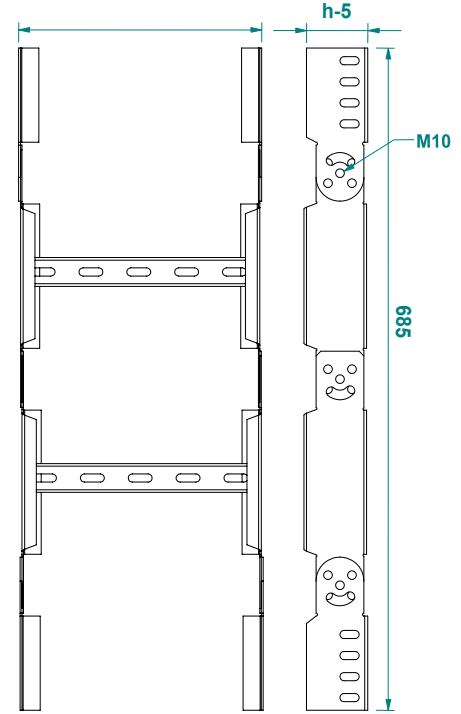

MMB H60 HDG

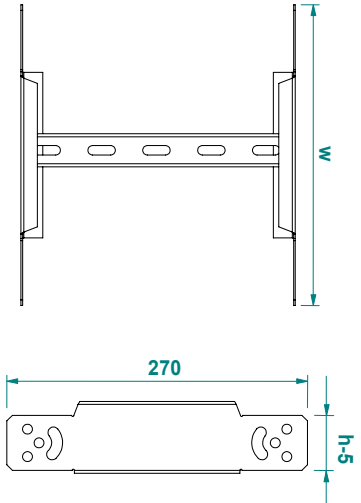

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method

to TS-EN 10346:2011 (PG)

SS- stainless steel AISI 304L and AISI 316L (SS)

EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0

Cable Ladder Systems of Side Height 60



MTK
MADE IN TURKEY

Vertical Tee Bend of Cable Ladder, Lengthwise

Dikey "T" Merdiven Dönüş Elemanı - T-отвод кабельроста вертикальный, развернутый



Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized

MDT... H60		1.5mm	
CODE	Width a=b mm	kg 1pc	pcs
MDT 610 15 HDG	100	3.34	1
MDT 615 15 HDG	150	3.76	1
MDT 620 15 HDG	200	4.19	1
MDT 625 15 HDG	250	4.61	1
MDT 630 15 HDG	300	5.04	1
MDT 640 15 HDG	400	5.88	1
MDT 645 15 HDG	450	6.31	1
MDT 650 15 HDG	500	6.73	1
MDT 660 15 HDG	600	7.58	1
MDT 670 15 HDG	700	8.43	1
MDT 675 15 HDG	750	8.85	1
MDT 680 15 HDG	800	9.27	1
MDT 690 15 HDG	900	10.12	1
MDT 600 15 HDG	1000	10.97	1
MDT 602 15 HDG	1200	12.67	1

MDT... H60		2.0mm	
CODE	Width a=b mm	kg 1pc	pcs
MDT 610 20 HDG	100	4.45	1
MDT 615 20 HDG	150	5.02	1
MDT 620 20 HDG	200	5.58	1
MDT 625 20 HDG	250	6.15	1
MDT 630 20 HDG	300	6.71	1
MDT 640 20 HDG	400	7.84	1
MDT 645 20 HDG	450	8.41	1
MDT 650 20 HDG	500	8.97	1
MDT 660 20 HDG	600	10.10	1
MDT 670 20 HDG	700	11.23	1
MDT 675 20 HDG	750	11.80	1
MDT 680 20 HDG	800	12.36	1
MDT 690 20 HDG	900	13.49	1
MDT 600 20 HDG	1000	14.62	1
MDT 602 20 HDG	1200	16.89	1

MDT H60 HDG

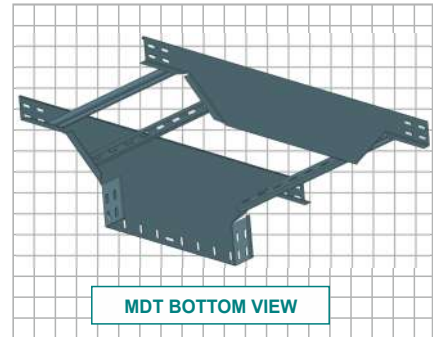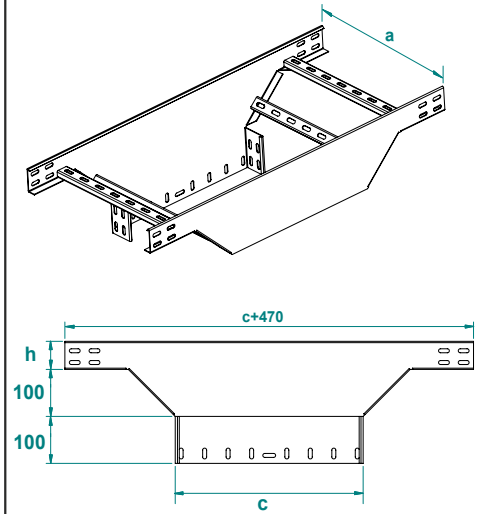

MDT BOTTOM VIEW

Vertical Tee Bend of Cable Ladder from the Middle

Dikey Ortadan "T" Merdiven Dönüş Elemanı - T-отвод кабельроста вертикальный, прямой



Important!


To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized

MMT... H60		1.5mm	
CODE	Width a=b mm	kg 1pc	pcs
MMT 610 15 HDG	100	2.84	1
MMT 615 15 HDG	150	3.05	1
MMT 620 15 HDG	200	3.25	1
MMT 625 15 HDG	250	3.46	1
MMT 630 15 HDG	300	3.66	1
MMT 640 15 HDG	400	4.08	1
MMT 645 15 HDG	450	4.28	1
MMT 650 15 HDG	500	4.49	1
MMT 660 15 HDG	600	4.90	1
MMT 670 15 HDG	700	5.31	1
MMT 675 15 HDG	750	5.52	1
MMT 680 15 HDG	800	5.73	1
MMT 690 15 HDG	900	6.14	1
MMT 600 15 HDG	1000	6.55	1
MMT 602 15 HDG	1200	7.37	1

MMT... H60		2.0mm	
CODE	Width a=b mm	kg 1pc	pcs
MMT 610 20 HDG	100	3.79	1
MMT 615 20 HDG	150	4.06	1
MMT 620 20 HDG	200	4.34	1
MMT 625 20 HDG	250	4.61	1
MMT 630 20 HDG	300	4.88	1
MMT 640 20 HDG	400	5.43	1
MMT 645 20 HDG	450	5.71	1
MMT 650 20 HDG	500	5.98	1
MMT 660 20 HDG	600	6.53	1
MMT 670 20 HDG	700	7.08	1
MMT 675 20 HDG	750	7.36	1
MMT 680 20 HDG	800	7.63	1
MMT 690 20 HDG	900	8.18	1
MMT 600 20 HDG	1000	8.73	1
MMT 602 20 HDG	1200	9.83	1

MMT H60 HDG

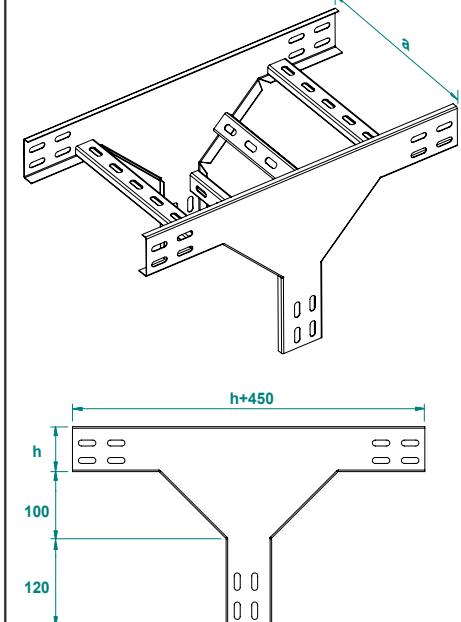

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method
to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0

Cable Ladder Systems of Side Height 60



MTK
MADE IN TURKEY

Vertical Tee Bend of Cable Ladder from the Middle Radius:300

Dikey Ortadan "T" Merdiven Dönüş Elemanı Radyus:300 - T-отвод кабельроста вертикальный, прямой радиус:300



Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized

MMTR2... H60		1.5mm	
CODE	Width a=b mm	Radius R mm	kg 1pc
MMTR2 610 15 HDG	100	300	6.18
MMTR2 615 15 HDG	150	300	6.41
MMTR2 620 15 HDG	200	300	6.64
MMTR2 625 15 HDG	250	300	6.87
MMTR2 630 15 HDG	300	300	7.10
MMTR2 640 15 HDG	400	300	7.56
MMTR2 645 15 HDG	450	300	7.79
MMTR2 650 15 HDG	500	300	8.02
MMTR2 660 15 HDG	600	300	8.48
MMTR2 670 15 HDG	700	300	8.94
MMTR2 675 15 HDG	750	300	9.17
MMTR2 680 15 HDG	800	300	9.40
MMTR2 690 15 HDG	900	300	9.86
MMTR2 600 15 HDG	1000	300	10.32
MMTR2 602 15 HDG	1200	300	11.24

MMTR2... H60		2.0mm	
CODE	Width a=b mm	Radius R mm	kg 1pc
MMTR2 610 20 HDG	100	300	8.24
MMTR2 615 20 HDG	150	300	8.55
MMTR2 620 20 HDG	200	300	8.86
MMTR2 625 20 HDG	250	300	9.16
MMTR2 630 20 HDG	300	300	9.47
MMTR2 640 20 HDG	400	300	10.08
MMTR2 645 20 HDG	450	300	10.39
MMTR2 650 20 HDG	500	300	11.69
MMTR2 660 20 HDG	600	300	11.31
MMTR2 670 20 HDG	700	300	11.92
MMTR2 675 20 HDG	750	300	12.22
MMTR2 680 20 HDG	800	300	12.53
MMTR2 690 20 HDG	900	300	13.14
MMTR2 600 20 HDG	1000	300	13.76
MMTR2 602 20 HDG	1200	300	14.98

Vertical Tee Bend of Cable Ladder from the Middle Radius:600

Dikey Ortadan "T" Merdiven Dönüş Elemanı Radyus:600 - T-отвод кабельроста вертикальный, прямой радиус:600



Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized



MMTR4... H60		1.5mm	
CODE	Width a=b mm	Radius R mm	kg 1pc
MMTR4 610 15 HDG	100	600	10.93
MMTR4 615 15 HDG	150	600	11.35
MMTR4 620 15 HDG	200	600	11.76
MMTR4 625 15 HDG	250	600	12.17
MMTR4 630 15 HDG	300	600	12.59
MMTR4 640 15 HDG	400	600	13.41
MMTR4 645 15 HDG	450	600	13.83
MMTR4 650 15 HDG	500	600	14.24
MMTR4 660 15 HDG	600	600	15.07
MMTR4 670 15 HDG	700	600	15.89
MMTR4 675 15 HDG	750	600	16.31
MMTR4 680 15 HDG	800	600	16.72
MMTR4 690 15 HDG	900	600	17.55
MMTR4 600 15 HDG	1000	600	18.37
MMTR4 602 15 HDG	1200	600	20.02

MMTR4... H60		2.0mm	
CODE	Width a=b mm	Radius R mm	kg 1pc
MMTR4 610 20 HDG	100	600	14.57
MMTR4 615 20 HDG	150	600	15.13
MMTR4 620 20 HDG	200	600	15.68
MMTR4 625 20 HDG	250	600	16.23
MMTR4 630 20 HDG	300	600	16.78
MMTR4 640 20 HDG	400	600	17.88
MMTR4 645 20 HDG	450	600	18.43
MMTR4 650 20 HDG	500	600	18.98
MMTR4 660 20 HDG	600	600	20.09
MMTR4 670 20 HDG	700	600	21.19
MMTR4 675 20 HDG	750	600	21.74
MMTR4 680 20 HDG	800	600	22.29
MMTR4 690 20 HDG	900	600	23.39
MMTR4 600 20 HDG	1000	600	24.49
MMTR4 602 20 HDG	1200	600	26.70

MMTR2 H60 HDG

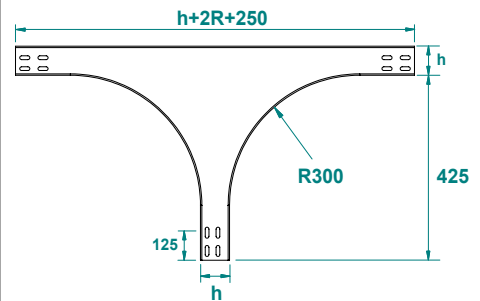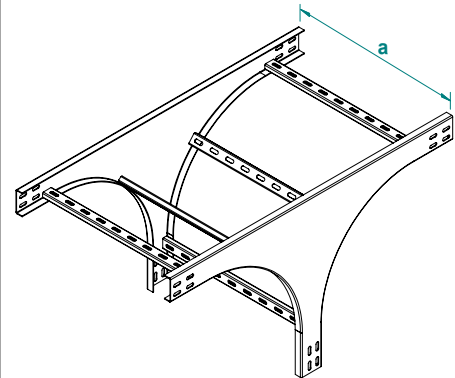

MMTR4 H60 HDG

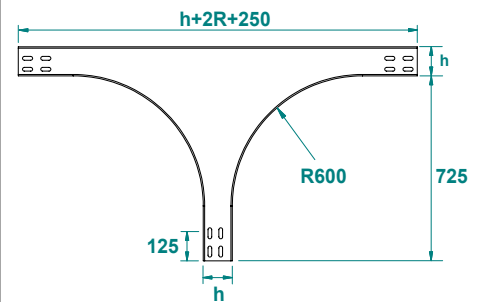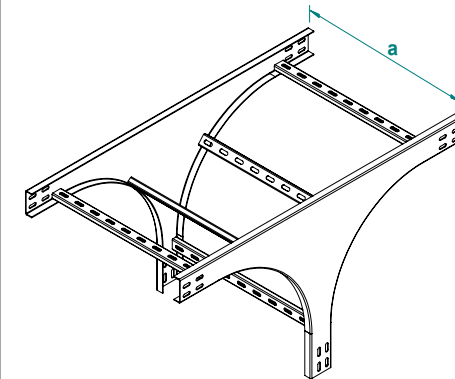

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method
to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0


Cable Ladder Systems of Side Height 60



MTK
MADE IN TURKEY

Middle Reducer Connection (set)

Parçalı Redüksiyon (Orta) - Редукционные планки, симметричные

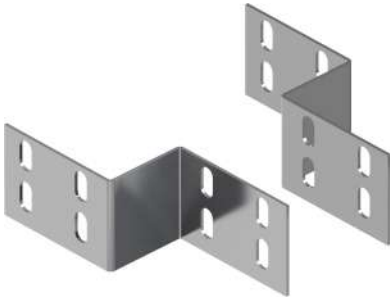

To install cable ladder bends use screw sets
CFS M6 or CFS M8


Hot-Dip Galvanized

RO... H60		1.5mm	
CODE	Reduction a mm	kg 1 set	pcs
RO 605 15 HDG	50	0.25	1
RO 610 15 HDG	100	0.29	1
RO 615 15 HDG	150	0.32	1
RO 620 15 HDG	200	0.36	1
RO 625 15 HDG	250	0.39	1
RO 630 15 HDG	300	0.43	1
RO 635 15 HDG	350	0.46	1
RO 640 15 HDG	400	0.50	1
RO 645 15 HDG	450	0.53	1
RO 650 15 HDG	500	0.57	1
RO 655 15 HDG	550	0.61	1
RO 660 15 HDG	600	0.64	1
RO 665 15 HDG	650	0.68	1
RO 670 15 HDG	700	0.71	1
RO 675 15 HDG	750	0.75	1
RO 680 15 HDG	800	0.78	1
RO 690 15 HDG	900	0.85	1

RO... H60		2.0mm	
CODE	Reduction a mm	kg 1 set	pcs
RO 605 20 HDG	50	0.33	1
RO 610 20 HDG	100	0.38	1
RO 615 20 HDG	150	0.43	1
RO 620 20 HDG	200	0.48	1
RO 625 20 HDG	250	0.52	1
RO 630 20 HDG	300	0.57	1
RO 635 20 HDG	350	0.62	1
RO 640 20 HDG	400	0.66	1
RO 645 20 HDG	450	0.71	1
RO 650 20 HDG	500	0.76	1
RO 655 20 HDG	550	0.81	1
RO 660 20 HDG	600	0.85	1
RO 665 20 HDG	650	0.90	1
RO 670 20 HDG	700	0.95	1
RO 675 20 HDG	750	0.99	1
RO 680 20 HDG	800	1.04	1
RO 690 20 HDG	900	1.14	1

Stop End (Blind End)

Sonlandırma - Зарядушка

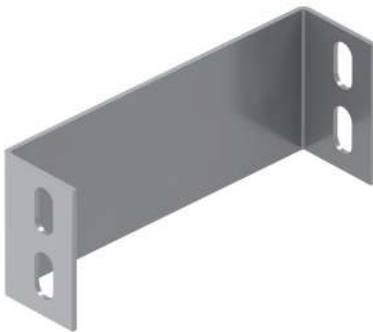



To install cable ladder bends use screw sets
CFS M6 or CFS M8

Hot-Dip Galvanized



SON... H60			1.5mm	
CODE	Width a=b mm	Radius R mm	 kg 1pc	 pcs
SON 610 15 HDG	100	600	0.16	1
SON 615 15 HDG	150	600	0.20	1
SON 620 15 HDG	200	600	0.23	1
SON 625 15 HDG	250	600	0.27	1
SON 630 15 HDG	300	600	0.30	1
SON 640 15 HDG	400	600	0.37	1
SON 645 15 HDG	450	600	0.41	1
SON 650 15 HDG	500	600	0.44	1
SON 660 15 HDG	600	600	0.51	1
SON 670 15 HDG	700	600	0.58	1
SON 675 15 HDG	750	600	0.62	1
SON 680 15 HDG	800	600	0.65	1
SON 690 15 HDG	900	600	0.73	1
SON 600 15 HDG	1000	600	0.80	1
SON 602 15 HDG	1200	600	0.94	1

SON... H60		2.0mm		
CODE	Width a=b mm	Radius R mm	 kg 1pc	 pcs
SON 610 20 HDG	100	600	0.21	1
SON 615 20 HDG	150	600	0.26	1
SON 620 20 HDG	200	600	0.31	1
SON 625 20 HDG	250	600	0.35	1
SON 630 20 HDG	300	600	0.40	1
SON 640 20 HDG	400	600	0.49	1
SON 645 20 HDG	450	600	0.54	1
SON 650 20 HDG	500	600	0.59	1
SON 660 20 HDG	600	600	0.68	1
SON 670 20 HDG	700	600	0.78	1
SON 675 20 HDG	750	600	0.82	1
SON 680 20 HDG	800	600	0.87	1
SON 690 20 HDG	900	600	0.97	1
SON 600 20 HDG	1000	600	1.06	1
SON 602 20 HDG	1200	600	1.25	1

RO H60 HDG

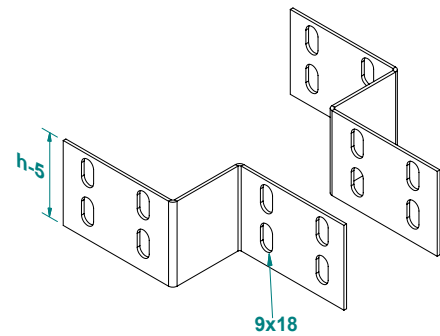

SON H60 HDG

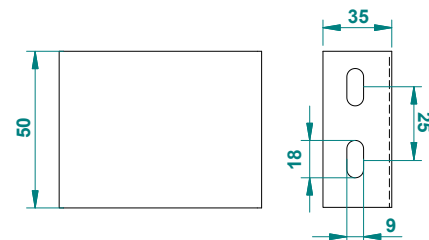

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method

to TS-EN 10346:2011 (PG)

SS- stainless steel AISI 304L and AISI 316L (SS)

EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0


Cable Ladder Systems of Side Height 60



MTK
MADE IN TURKEY

Left Reducer Connection (set)

Parçalı Redüksiyon (Sol) - Редукционные планки, левосторонние

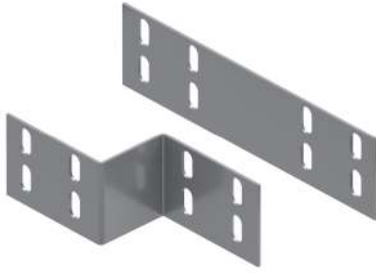

Hot-Dip Galvanized


To install cable ladder bends use screw sets
CFS M6 or CFS M8

RL... H60		1.5mm	
CODE	Reduction a mm	KG 1 set	pcs
RL 605 15 HDG	50	0.25	1
RL 610 15 HDG	100	0.29	1
RL 615 15 HDG	150	0.32	1
RL 620 15 HDG	200	0.36	1
RL 625 15 HDG	250	0.39	1
RL 630 15 HDG	300	0.43	1
RL 635 15 HDG	350	0.46	1
RL 640 15 HDG	400	0.50	1
RL 645 15 HDG	450	0.53	1
RL 650 15 HDG	500	0.57	1
RL 655 15 HDG	550	0.61	1
RL 660 15 HDG	600	0.64	1
RL 665 15 HDG	650	0.68	1
RL 670 15 HDG	700	0.71	1
RL 675 15 HDG	750	0.75	1
RL 680 15 HDG	800	0.78	1
RL 690 15 HDG	900	0.85	1

RL... H60		2.0mm	
CODE	Reduction a mm	KG 1 set	pcs
RL 605 20 HDG	50	0.33	1
RL 610 20 HDG	100	0.38	1
RL 615 20 HDG	150	0.43	1
RL 620 20 HDG	200	0.48	1
RL 625 20 HDG	250	0.52	1
RL 630 20 HDG	300	0.57	1
RL 635 20 HDG	350	0.62	1
RL 640 20 HDG	400	0.66	1
RL 645 20 HDG	450	0.71	1
RL 650 20 HDG	500	0.76	1
RL 655 20 HDG	550	0.81	1
RL 660 20 HDG	600	0.85	1
RL 665 20 HDG	650	0.90	1
RL 670 20 HDG	700	0.95	1
RL 675 20 HDG	750	0.99	1
RL 680 20 HDG	800	1.04	1
RL 690 20 HDG	900	1.14	1

Right Reducer Connection (set)

Parçalı Redüksiyon (Sağ) - Редукционные планки, правосторонние

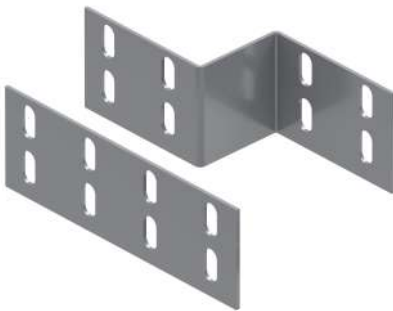



Hot-Dip Galvanized

To install cable ladder bends use screw sets
CFS M6 or CFS M8



RG... H60		1.5mm	
CODE	Reduction a mm	KG 1 set	pcs
RG 605 15 HDG	50	0.25	1
RG 610 15 HDG	100	0.29	1
RG 615 15 HDG	150	0.32	1
RG 620 15 HDG	200	0.36	1
RG 625 15 HDG	250	0.39	1
RG 630 15 HDG	300	0.43	1
RG 635 15 HDG	350	0.46	1
RG 640 15 HDG	400	0.50	1
RG 645 15 HDG	450	0.53	1
RG 650 15 HDG	500	0.57	1
RG 655 15 HDG	550	0.61	1
RG 660 15 HDG	600	0.64	1
RG 665 15 HDG	650	0.68	1
RG 670 15 HDG	700	0.71	1
RG 675 15 HDG	750	0.75	1
RG 680 15 HDG	800	0.78	1
RG 690 15 HDG	900	0.85	1

RG... H60		2.0mm	
CODE	Reduction a mm	KG 1 set	pcs
RG 605 20 HDG	50	0.33	1
RG 610 20 HDG	100	0.38	1
RG 615 20 HDG	150	0.43	1
RG 620 20 HDG	200	0.48	1
RG 625 20 HDG	250	0.52	1
RG 630 20 HDG	300	0.57	1
RG 635 20 HDG	350	0.62	1
RG 640 20 HDG	400	0.66	1
RG 645 20 HDG	450	0.71	1
RG 650 20 HDG	500	0.76	1
RG 655 20 HDG	550	0.81	1
RG 660 20 HDG	600	0.85	1
RG 665 20 HDG	650	0.90	1
RG 670 20 HDG	700	0.95	1
RG 675 20 HDG	750	0.99	1
RG 680 20 HDG	800	1.04	1
RG 690 20 HDG	900	1.14	1

RL H60 HDG

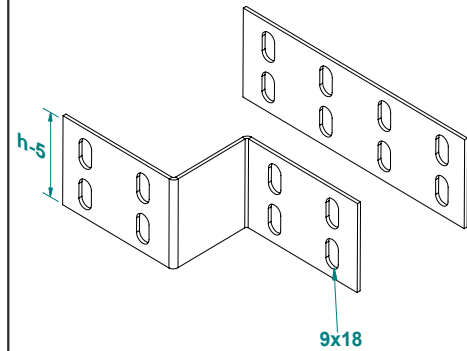

RG H60 HDG

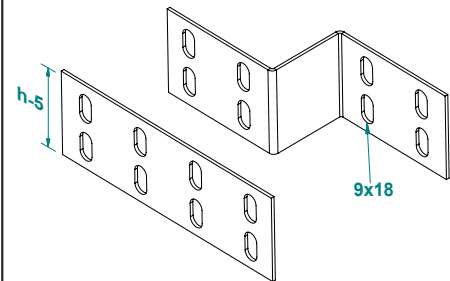

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method

to TS-EN 10346:2011 (PG)

SS- stainless steel AISI 304L and AISI 316L (SS)

EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0

Adjustable Vertical Connector

Dikey Seviye Degistirme Eki - Шарнирный соединитель



BDD 260

BDD 360

Hot-Dip Galvanized


To install cable ladder bends use screw sets CFS M6 or CFS M8

BDD 2 ... H60				1.5mm	
CODE	Length L mm	KG ad/pc	pcs		
BDD 260 15 HDG	250	0.29	1		
				2.0mm	
BDD 260 20 HDG	250	0.38	1		
				2.5mm	
BDD 260 25 HDG	250	0.48	1		

BDD 3 ... H60				1.5mm	
CODE	Length L mm	KG ad/pc	pcs		
BDD 360 15 HDG	250	0.33	1		
				2.0mm	
BDD 360 20 HDG	250	0.43	1		
				2.5mm	
BDD 360 25 HDG	250	0.54	1		

Adjustable Horizontal Connector - Long Type

Yatay seviye degistirme eki - Uzun - Угловой соединитель - длинный

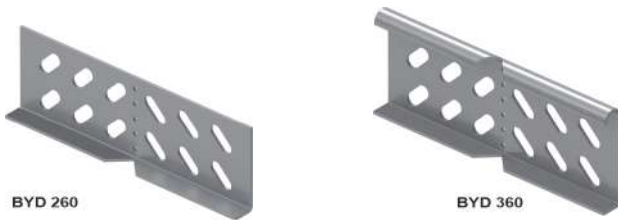

BYD 260

BYD 360

Pre - Galvanized

To install cable ladder bends use screw sets CFS M6 or CFS M8

BYD 2 ... H60				1.5mm	
CODE	Length L mm	KG 1m	pcs		
BYD 260 15 HDG	175	0.16	1		
				2.0mm	
BYD 260 20 HDG	175	0.21	1		
				2.5mm	
BYD 260 25 HDG	175	0.26	50		

BYD 3 ... H60				1.5mm	
CODE	Length L mm	KG 1m	pcs		
BYD 360 15 HDG	175	0.18	1		
				2.0mm	
BYD 360 20 HDG	175	0.24	1		
				2.5mm	
BYD 360 25 HDG	175	0.30	50		

Seperator

Seperator - Перегородка



SEP 1 H45

SEP 2 H45

Pre - Galvanized



To install cable ladder bends use screw sets CFS M6 or CFS M8

SEP 1 ... H45				1.0mm	
CODE	Height H mm	Length L mm	KG 1m	pcs	
SEP 145 10 HDG	135	3000	0.52	1	
				1.5mm	
SEP 145 15 HDG	135	3000	0.77	1	
				2.0mm	
SEP 145 20 HDG	135	3000	1.03	1	

SEP 2 ... H45				1.0mm	
CODE	Height H mm	Length L mm	KG 1m	pcs	
SEP 245 10 HDG	135	3000	0.59	1	
				1.5mm	
SEP 245 15 HDG	135	3000	0.89	1	
				2.0mm	
SEP 245 20 HDG	135	3000	1.18	1	



BDD 260

BDD 360

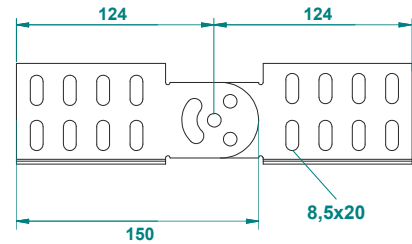



BYD2 H60 HDG

BYD3 H60 HDG



SEP 1 H45 HDG

SEP 2 H45 HDG

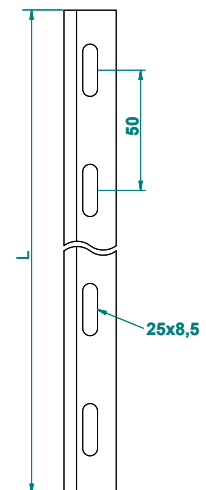

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method

to TS-EN 10346:2011 (PG)

SS- stainless steel AISI 304L and AISI 316L (SS)

EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0