


# Cable Ladder Systems of Side Height 75



**MTK**  
MADE IN TURKEY

## Cable Ladder

Kablo Merdiveni SKM Serisi - Кабельросты

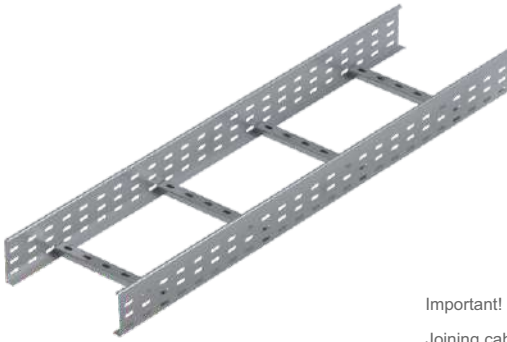

Important!

Joining cable ladder sections together only through the use of couplers 2 pcs for 1 length To install cable ladder-straight use Screw sets CFS M6 or CFS M8


### Hot-Dip Galvanized

| SKM ... H75     |                  | 1.5mm             |          |     |
|-----------------|------------------|-------------------|----------|-----|
| CODE            | Width<br>a<br>mm | Length<br>L<br>mm | KG<br>1m | pcs |
| SKM 7510 15 HDG | 100              | 3000              | 2.99     | 2   |
| SKM 7515 15 HDG | 150              | 3000              | 3.13     | 2   |
| SKM 7520 15 HDG | 200              | 3000              | 3.26     | 2   |
| SKM 7525 15 HDG | 250              | 3000              | 3.40     | 2   |
| SKM 7530 15 HDG | 300              | 3000              | 3.54     | 2   |
| SKM 7540 15 HDG | 400              | 3000              | 3.81     | 2   |
| SKM 7545 15 HDG | 450              | 3000              | 3.95     | 2   |
| SKM 7550 15 HDG | 500              | 3000              | 4.09     | 2   |
| SKM 7560 15 HDG | 600              | 3000              | 4.36     | 2   |
| SKM 7570 15 HDG | 700              | 3000              | 4.64     | 2   |
| SKM 7575 15 HDG | 750              | 3000              | 4.77     | 2   |
| SKM 7580 15 HDG | 800              | 3000              | 4.91     | 2   |
| SKM 7590 15 HDG | 900              | 3000              | 5.19     | 2   |
| SKM 7500 15 HDG | 1000             | 3000              | 5.46     | 2   |
| SKM 7502 15 HDG | 1200             | 3000              | 6.01     | 2   |

| SKM ... H75     |                  | 2.0mm             |          |     |
|-----------------|------------------|-------------------|----------|-----|
| CODE            | Width<br>a<br>mm | Length<br>L<br>mm | KG<br>1m | pcs |
| SKM 7510 20 HDG | 100              | 3000              | 3.98     | 2   |
| SKM 7515 20 HDG | 150              | 3000              | 4.17     | 2   |
| SKM 7520 20 HDG | 200              | 3000              | 4.35     | 2   |
| SKM 7525 20 HDG | 250              | 3000              | 4.53     | 2   |
| SKM 7530 20 HDG | 300              | 3000              | 4.71     | 2   |
| SKM 7540 20 HDG | 400              | 3000              | 5.08     | 2   |
| SKM 7545 20 HDG | 450              | 3000              | 5.26     | 2   |
| SKM 7550 20 HDG | 500              | 3000              | 5.45     | 2   |
| SKM 7560 20 HDG | 600              | 3000              | 5.81     | 2   |
| SKM 7570 20 HDG | 700              | 3000              | 6.18     | 2   |
| SKM 7575 20 HDG | 750              | 3000              | 6.36     | 2   |
| SKM 7580 20 HDG | 800              | 3000              | 6.55     | 2   |
| SKM 7590 20 HDG | 900              | 3000              | 6.91     | 2   |
| SKM 7500 20 HDG | 1000             | 3000              | 7.28     | 2   |
| SKM 7502 20 HDG | 1200             | 3000              | 8.01     | 2   |

## Fixing Unit for Cable Ladder

Merdiveni Sabitleme Elemanı - Фиксатор кабельроста, боковой



### Hot-Dip Galvanized


| MT/1     |                 | 3.0mm                |             |     |
|----------|-----------------|----------------------|-------------|-----|
| CODE     | Size<br>h<br>mm | Thickness<br>T<br>mm | KG<br>ad/pc | pcs |
| MT/1 HDG | 35x50           | 3,0                  | 0,040       | 100 |

### Stainless Steel - SS 304

| MT/1    |                 | 2.5mm                |             |     |
|---------|-----------------|----------------------|-------------|-----|
| CODE    | Size<br>h<br>mm | Thickness<br>T<br>mm | KG<br>ad/pc | pcs |
| MT/1 S4 | 35x50           | 2,5                  | 0,032       | 100 |

## Straight Connector (Coupler)

Birleştirme Elemanı - Прямой соединитель



To install one length; use 2 pieces of KBE connector  
8 sets of CFS bolts and nuts. (M6 or M8)

### Hot-Dip Galvanized

| KBE 2 ... H75  |                   | 1.5mm             |             |     |
|----------------|-------------------|-------------------|-------------|-----|
| CODE           | Height<br>h<br>mm | Length<br>L<br>mm | KG<br>ad/pc | pcs |
| KBE 275 15 HDG | 70                | 175               | 0.20        | 100 |
|                |                   | 2.0mm             |             |     |
| KBE 275 20 HDG | 70                | 175               | 0.27        | 100 |
|                |                   | 2.5mm             |             |     |
| KBE 275 25 HDG | 70                | 175               | 0.33        | 100 |


| KBE 3 ... H75  |                   | 1.5mm             |             |     |
|----------------|-------------------|-------------------|-------------|-----|
| CODE           | Height<br>h<br>mm | Length<br>L<br>mm | KG<br>ad/pc | pcs |
| KBE 375 15 HDG | 85                | 175               | 0.22        | 100 |
|                |                   | 2.0mm             |             |     |
| KBE 375 20 HDG | 85                | 175               | 0.29        | 100 |
|                |                   | 2.5mm             |             |     |
| KBE 375 25 HDG | 85                | 175               | 0.37        | 100 |

### Dacromet


| CFS        |            | M6           |             |     |
|------------|------------|--------------|-------------|-----|
| CODE       | Size<br>mm | Length<br>mm | KG<br>1 Set | pcs |
| CFS M6 HDG | M6         | 15           | 0,008       | 500 |

| CFS        |            | M8           |             |     |
|------------|------------|--------------|-------------|-----|
| CODE       | Size<br>mm | Length<br>mm | KG<br>1 Set | pcs |
| CFS M8 HDG | M8         | 15           | 0,014       | 500 |

## SKM H75 HDG

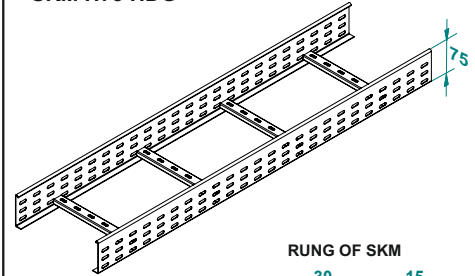


RUNG OF SKM


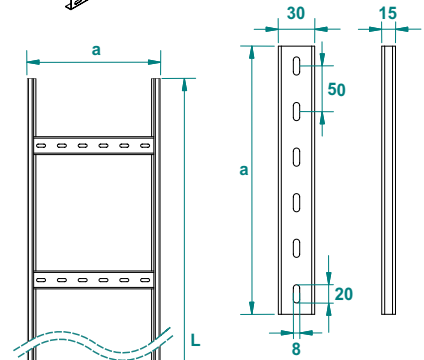


| Width | Cross Section |
|-------|---------------|
| 100   | 83            |
| 150   | 125,5         |
| 200   | 168           |
| 300   | 253           |
| 400   | 338           |
| 500   | 423           |
| 600   | 508           |
| 750   | 635,5         |
| 900   | 763           |
| 1000  | 848           |
| 1200  | 1018          |

## MT/1




## KBE 2 H75 HDG



## CFS

Round head square neck bolt & Flanged nut



## APPLICATIONS

Cable routing

## MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method

SS- stainless steel AISI 304L and AISI 316L (SS)

EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0

# Cable Ladder Systems of Side Height 75



**MTK**  
MADE IN TURKEY

## Cable Ladder

Kablo Merdiveni UKM Serisi - Кабельлесты



Important!

Joining cable ladder sections together only through the use of couplers 2 pcs for 1 length To install cable ladder-straight use Screw sets CFS M6 or CFS M8

## Hot-Dip Galvanized



| UKM ... H75     |                  | 1.5mm             |          |     |  |
|-----------------|------------------|-------------------|----------|-----|--|
| CODE            | Width<br>a<br>mm | Length<br>L<br>mm | kg<br>1m | pcs |  |
| UKM 7510 15 HDG | 100              | 3000              | 3.25     | 2   |  |
| UKM 7515 15 HDG | 150              | 3000              | 3.41     | 2   |  |
| UKM 7520 15 HDG | 200              | 3000              | 3.56     | 2   |  |
| UKM 7525 15 HDG | 250              | 3000              | 3.71     | 2   |  |
| UKM 7530 15 HDG | 300              | 3000              | 3.87     | 2   |  |
| UKM 7540 15 HDG | 400              | 3000              | 4.17     | 2   |  |
| UKM 7545 15 HDG | 450              | 3000              | 4.33     | 2   |  |
| UKM 7550 15 HDG | 500              | 3000              | 4.48     | 2   |  |
| UKM 7560 15 HDG | 600              | 3000              | 4.79     | 2   |  |
| UKM 7570 15 HDG | 700              | 3000              | 5.09     | 2   |  |
| UKM 7575 15 HDG | 750              | 3000              | 5.24     | 2   |  |
| UKM 7580 15 HDG | 800              | 3000              | 5.40     | 2   |  |
| UKM 7590 15 HDG | 900              | 3000              | 5.70     | 2   |  |
| UKM 7500 15 HDG | 1000             | 3000              | 6.01     | 2   |  |
| UKM 7502 15 HDG | 1200             | 3000              | 6.62     | 2   |  |

| UKM ... H75     |                  | 2.5mm             |          |     |  |
|-----------------|------------------|-------------------|----------|-----|--|
| CODE            | Width<br>a<br>mm | Length<br>L<br>mm | kg<br>1m | pcs |  |
| UKM 7510 25 HDG | 100              | 3000              | 5.42     | 2   |  |
| UKM 7515 25 HDG | 150              | 3000              | 5.68     | 2   |  |
| UKM 7520 25 HDG | 200              | 3000              | 5.93     | 2   |  |
| UKM 7525 25 HDG | 250              | 3000              | 6.19     | 2   |  |
| UKM 7530 25 HDG | 300              | 3000              | 6.44     | 2   |  |
| UKM 7540 25 HDG | 400              | 3000              | 6.95     | 2   |  |
| UKM 7545 25 HDG | 450              | 3000              | 7.21     | 2   |  |
| UKM 7550 25 HDG | 500              | 3000              | 7.46     | 2   |  |
| UKM 7560 25 HDG | 600              | 3000              | 7.97     | 2   |  |
| UKM 7570 25 HDG | 700              | 3000              | 8.48     | 2   |  |
| UKM 7575 25 HDG | 750              | 3000              | 8.74     | 2   |  |
| UKM 7580 25 HDG | 800              | 3000              | 8.99     | 2   |  |
| UKM 7590 25 HDG | 900              | 3000              | 9.50     | 2   |  |
| UKM 7500 25 HDG | 1000             | 3000              | 10.01    | 2   |  |
| UKM 7502 25 HDG | 1200             | 3000              | 11.03    | 2   |  |

| UKM ... H75     |                  | 2.0mm             |          |     |  |
|-----------------|------------------|-------------------|----------|-----|--|
| CODE            | Width<br>a<br>mm | Length<br>L<br>mm | kg<br>1m | pcs |  |
| UKM 7510 20 HDG | 100              | 3000              | 4.34     | 2   |  |
| UKM 7515 20 HDG | 150              | 3000              | 4.54     | 2   |  |
| UKM 7520 20 HDG | 200              | 3000              | 4.75     | 2   |  |
| UKM 7525 20 HDG | 250              | 3000              | 4.95     | 2   |  |
| UKM 7530 20 HDG | 300              | 3000              | 5.15     | 2   |  |
| UKM 7540 20 HDG | 400              | 3000              | 5.56     | 2   |  |
| UKM 7545 20 HDG | 450              | 3000              | 5.77     | 2   |  |
| UKM 7550 20 HDG | 500              | 3000              | 5.97     | 2   |  |
| UKM 7560 20 HDG | 600              | 3000              | 6.38     | 2   |  |
| UKM 7570 20 HDG | 700              | 3000              | 6.79     | 2   |  |
| UKM 7575 20 HDG | 750              | 3000              | 6.99     | 2   |  |
| UKM 7580 20 HDG | 800              | 3000              | 7.20     | 2   |  |
| UKM 7590 20 HDG | 900              | 3000              | 7.60     | 2   |  |
| UKM 7500 20 HDG | 1000             | 3000              | 8.10     | 2   |  |
| UKM 7502 20 HDG | 1200             | 3000              | 8.83     | 2   |  |


| UKM ... H75     |                  | 3.0mm             |          |     |  |
|-----------------|------------------|-------------------|----------|-----|--|
| CODE            | Width<br>a<br>mm | Length<br>L<br>mm | kg<br>1m | pcs |  |
| UKM 7510 30 HDG | 100              | 3000              | 6.50     | 2   |  |
| UKM 7515 30 HDG | 150              | 3000              | 6.81     | 2   |  |
| UKM 7520 30 HDG | 200              | 3000              | 7.12     | 2   |  |
| UKM 7525 30 HDG | 250              | 3000              | 7.42     | 2   |  |
| UKM 7530 30 HDG | 300              | 3000              | 7.73     | 2   |  |
| UKM 7540 30 HDG | 400              | 3000              | 8.34     | 2   |  |
| UKM 7545 30 HDG | 450              | 3000              | 8.65     | 2   |  |
| UKM 7550 30 HDG | 500              | 3000              | 8.95     | 2   |  |
| UKM 7560 30 HDG | 600              | 3000              | 9.57     | 2   |  |
| UKM 7570 30 HDG | 700              | 3000              | 10.18    | 2   |  |
| UKM 7575 30 HDG | 750              | 3000              | 10.48    | 2   |  |
| UKM 7580 30 HDG | 800              | 3000              | 10.79    | 2   |  |
| UKM 7590 30 HDG | 900              | 3000              | 11.40    | 2   |  |
| UKM 7500 30 HDG | 1000             | 3000              | 12.02    | 2   |  |
| UKM 7502 30 HDG | 1200             | 3000              | 13.24    | 2   |  |

## UKM H75 HDG (L3000)

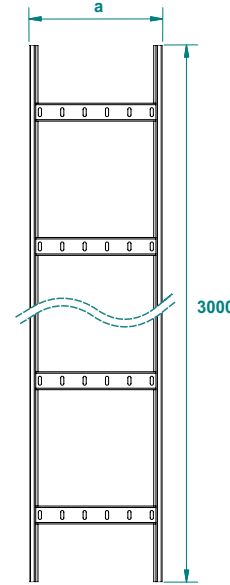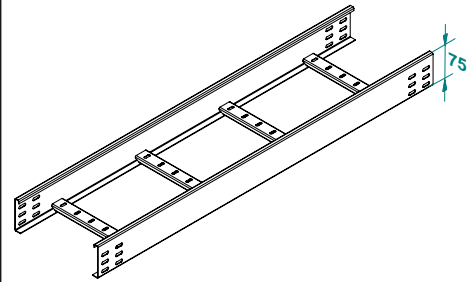


| Width | Cross Section |
|-------|---------------|
| 100   | 83            |
| 150   | 125,5         |
| 200   | 168           |
| 300   | 253           |
| 400   | 338           |
| 500   | 423           |
| 600   | 508           |
| 750   | 635,5         |
| 900   | 763           |
| 1000  | 848           |
| 1200  | 1018          |

## RUNG OF UKM

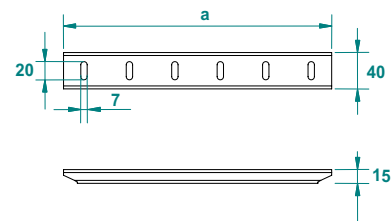

## Fixing Unit for Cable Ladder


Merdiveni Sabitleme Elemanı - Фиксатор кабельлесты, боковой

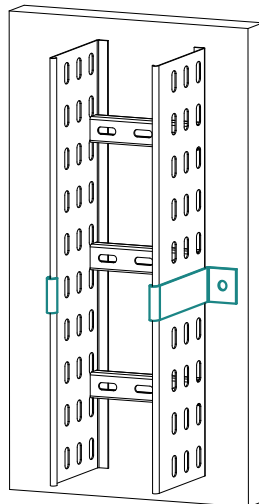

## Hot-Dip Galvanized

| MT/2 ... H75 |                   | 1.5mm                  |          |     |  |
|--------------|-------------------|------------------------|----------|-----|--|
| CODE         | Height<br>h<br>mm | Fixing Hole<br>D<br>mm | kg<br>1m | pcs |  |
| MT/2 75 HDG  | 80                | 11                     | 0.11     | 100 |  |

## MT/2

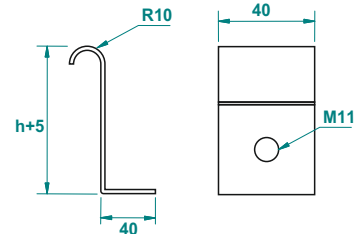

## APPLICATIONS

Cable routing

## MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method to TS-EN 10346:2011 (PG)  
SS- stainless steel AISI 304L and AISI 316L (SS)  
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0


# Cable Ladder Systems of Side Height 75



**MTK**  
MADE IN TURKEY

## Cable Ladder

Kablo Merdiveni UKM Serisi - Кабельлесты

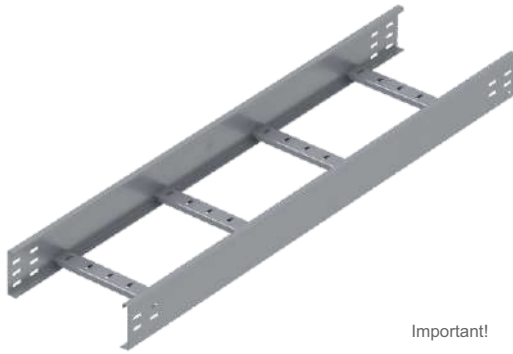

Important!

Joining cable ladder sections together only through the use of couplers 2 pcs for 1 length To install cable ladder-straight use Screw sets CFS M6 or CFS M8

## Hot-Dip Galvanized

| UKM ... H75        |                  |                   |          | 1.5mm |  |
|--------------------|------------------|-------------------|----------|-------|--|
| CODE               | Width<br>a<br>mm | Length<br>L<br>mm | KG<br>1m | pcs   |  |
| UKM 7510.60 15 HDG | 100              | 6000              | 3.25     | 2     |  |
| UKM 7515.60 15 HDG | 150              | 6000              | 3.41     | 2     |  |
| UKM 7520.60 15 HDG | 200              | 6000              | 3.56     | 2     |  |
| UKM 7525.60 15 HDG | 250              | 6000              | 3.71     | 2     |  |
| UKM 7530.60 15 HDG | 300              | 6000              | 3.87     | 2     |  |
| UKM 7540.60 15 HDG | 400              | 6000              | 4.17     | 2     |  |
| UKM 7545.60 15 HDG | 450              | 6000              | 4.33     | 2     |  |
| UKM 7550.60 15 HDG | 500              | 6000              | 4.48     | 2     |  |
| UKM 7560.60 15 HDG | 600              | 6000              | 4.79     | 2     |  |
| UKM 7570.60 15 HDG | 700              | 6000              | 5.09     | 2     |  |
| UKM 7575.60 15 HDG | 750              | 6000              | 5.24     | 2     |  |
| UKM 7580.60 15 HDG | 800              | 6000              | 5.40     | 2     |  |
| UKM 7590.60 15 HDG | 900              | 6000              | 5.70     | 2     |  |
| UKM 7500.60 15 HDG | 1000             | 6000              | 6.01     | 2     |  |
| UKM 7502.60 15 HDG | 1200             | 6000              | 6.62     | 2     |  |

|                    |                  |                   |          | 2.5mm |  |
|--------------------|------------------|-------------------|----------|-------|--|
| CODE               | Width<br>a<br>mm | Length<br>L<br>mm | KG<br>1m | pcs   |  |
| UKM 7510.60 25 HDG | 100              | 6000              | 5.42     | 2     |  |
| UKM 7515.60 25 HDG | 150              | 6000              | 5.68     | 2     |  |
| UKM 7520.60 25 HDG | 200              | 6000              | 5.93     | 2     |  |
| UKM 7525.60 25 HDG | 250              | 6000              | 6.19     | 2     |  |
| UKM 7530.60 25 HDG | 300              | 6000              | 6.44     | 2     |  |
| UKM 7540.60 25 HDG | 400              | 6000              | 6.95     | 2     |  |
| UKM 7545.60 25 HDG | 450              | 6000              | 7.21     | 2     |  |
| UKM 7550.60 25 HDG | 500              | 6000              | 7.46     | 2     |  |
| UKM 7560.60 25 HDG | 600              | 6000              | 7.97     | 2     |  |
| UKM 7570.60 25 HDG | 700              | 6000              | 8.48     | 2     |  |
| UKM 7575.60 25 HDG | 750              | 6000              | 8.74     | 2     |  |
| UKM 7580.60 25 HDG | 800              | 6000              | 8.99     | 2     |  |
| UKM 7590.60 25 HDG | 900              | 6000              | 9.50     | 2     |  |
| UKM 7500.60 25 HDG | 1000             | 6000              | 10.01    | 2     |  |
| UKM 7502.60 25 HDG | 1200             | 6000              | 11.03    | 2     |  |


| UKM ... H75        |                  |                   |          | 2.0mm |  |
|--------------------|------------------|-------------------|----------|-------|--|
| CODE               | Width<br>a<br>mm | Length<br>L<br>mm | KG<br>1m | pcs   |  |
| UKM 7510.60 20 HDG | 100              | 6000              | 4.34     | 2     |  |
| UKM 7515.60 20 HDG | 150              | 6000              | 4.54     | 2     |  |
| UKM 7520.60 20 HDG | 200              | 6000              | 4.75     | 2     |  |
| UKM 7525.60 20 HDG | 250              | 6000              | 4.95     | 2     |  |
| UKM 7530.60 20 HDG | 300              | 6000              | 5.15     | 2     |  |
| UKM 7540.60 20 HDG | 400              | 6000              | 5.56     | 2     |  |
| UKM 7545.60 20 HDG | 450              | 6000              | 5.77     | 2     |  |
| UKM 7550.60 20 HDG | 500              | 6000              | 5.97     | 2     |  |
| UKM 7560.60 20 HDG | 600              | 6000              | 6.38     | 2     |  |
| UKM 7570.60 20 HDG | 700              | 6000              | 6.79     | 2     |  |
| UKM 7575.60 20 HDG | 750              | 6000              | 6.99     | 2     |  |
| UKM 7580.60 20 HDG | 800              | 6000              | 7.20     | 2     |  |
| UKM 7590.60 20 HDG | 900              | 6000              | 7.60     | 2     |  |
| UKM 7500.60 20 HDG | 1000             | 6000              | 8.01     | 2     |  |
| UKM 7502.60 20 HDG | 1200             | 6000              | 8.83     | 2     |  |

|                    |                  |                   |          | 3.0mm |  |
|--------------------|------------------|-------------------|----------|-------|--|
| CODE               | Width<br>a<br>mm | Length<br>L<br>mm | KG<br>1m | pcs   |  |
| UKM 7510.60 30 HDG | 100              | 6000              | 6.50     | 2     |  |
| UKM 7515.60 30 HDG | 150              | 6000              | 6.81     | 2     |  |
| UKM 7520.60 30 HDG | 200              | 6000              | 7.12     | 2     |  |
| UKM 7525.60 30 HDG | 250              | 6000              | 7.42     | 2     |  |
| UKM 7530.60 30 HDG | 300              | 6000              | 7.73     | 2     |  |
| UKM 7540.60 30 HDG | 400              | 6000              | 8.34     | 2     |  |
| UKM 7545.60 30 HDG | 450              | 6000              | 8.65     | 2     |  |
| UKM 7550.60 30 HDG | 500              | 6000              | 8.95     | 2     |  |
| UKM 7560.60 30 HDG | 600              | 6000              | 9.57     | 2     |  |
| UKM 7570.60 30 HDG | 700              | 6000              | 10.18    | 2     |  |
| UKM 7575.60 30 HDG | 750              | 6000              | 10.48    | 2     |  |
| UKM 7580.60 30 HDG | 800              | 6000              | 10.79    | 2     |  |
| UKM 7590.60 30 HDG | 900              | 6000              | 11.40    | 2     |  |
| UKM 7500.60 30 HDG | 1000             | 6000              | 12.02    | 2     |  |
| UKM 7502.60 30 HDG | 1200             | 6000              | 13.24    | 2     |  |

## Beam Fixing Unit For Cable Ladder (Set)


Merdiveni / Demire Sabitleme Elemanı (Takım) - Фиксатор кабельлесты на балку

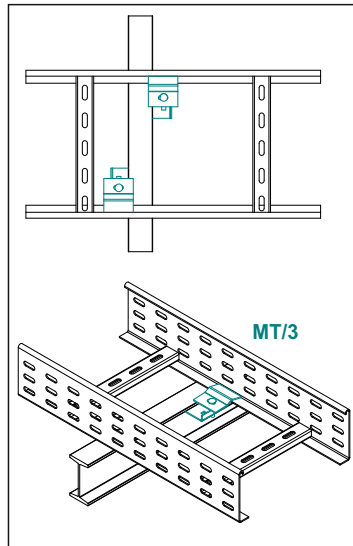


## Stainless Steel - AISI 304L

| MT/3    |                      |                      |             | 2.0mm |  |
|---------|----------------------|----------------------|-------------|-------|--|
| CODE    | Bolt<br>Metric<br>mm | Thickness<br>T<br>mm | KG<br>ad/pc | pcs   |  |
| MT/3 S4 | M6x30                | 2,0                  | 0,12        | 100   |  |

## UKM H75 HDG (L6000)

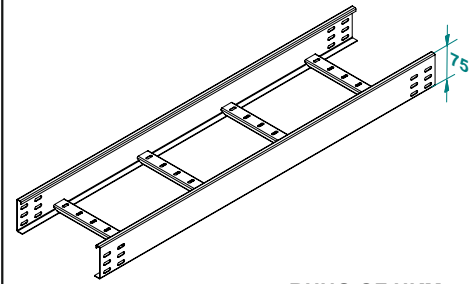


## RUNG OF UKM

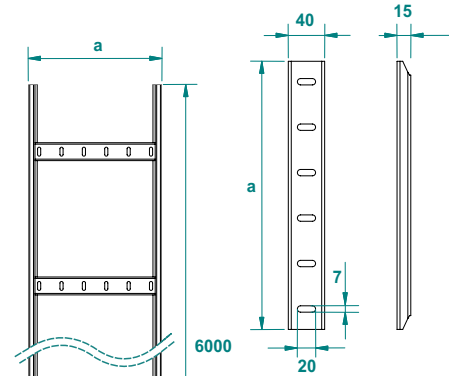

| Width | Cross Section |
|-------|---------------|
| 100   | 83            |
| 150   | 125,5         |
| 200   | 168           |
| 300   | 253           |
| 400   | 338           |
| 500   | 423           |
| 600   | 508           |
| 750   | 635,5         |
| 900   | 763           |
| 1000  | 848           |
| 1200  | 1018          |

## MT/3

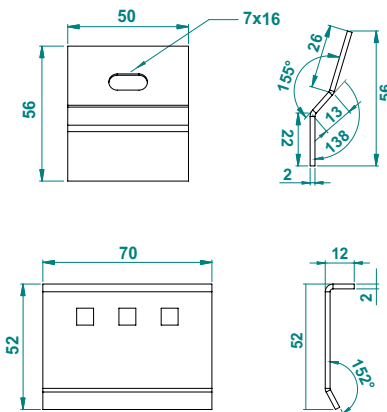

## APPLICATIONS

Cable routing

## MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method to TS-EN 10346:2011 (PG)  
SS- stainless steel AISI 304L and AISI 316L (SS)  
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0

## 90° Horizontal Bend of Cable Ladder

90° Merdiven Yatay Dönüş Elemanı - Угол кабельроста горизонтальный 90°



Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

### Hot-Dip Galvanized

| M90... H75      |                    | 1.5mm             |          |     |  |
|-----------------|--------------------|-------------------|----------|-----|--|
| CODE            | Width<br>a=b<br>mm | Radius<br>R<br>mm | KG<br>1m | pcs |  |
| M90 7510 15 HDG | 100                | 150               | 1.61     | 1   |  |
| M90 7515 15 HDG | 150                | 150               | 1.87     | 1   |  |
| M90 7520 15 HDG | 200                | 150               | 2.06     | 1   |  |
| M90 7525 15 HDG | 250                | 150               | 2.32     | 1   |  |
| M90 7530 15 HDG | 300                | 150               | 2.51     | 1   |  |
| M90 7540 15 HDG | 400                | 150               | 3.03     | 1   |  |
| M90 7545 15 HDG | 450                | 150               | 3.28     | 1   |  |
| M90 7550 15 HDG | 500                | 150               | 3.48     | 1   |  |
| M90 7560 15 HDG | 600                | 150               | 3.93     | 1   |  |
| M90 7570 15 HDG | 700                | 150               | 4.39     | 1   |  |
| M90 7575 15 HDG | 750                | 150               | 5.40     | 1   |  |
| M90 7580 15 HDG | 800                | 150               | 5.70     | 1   |  |
| M90 7590 15 HDG | 900                | 150               | 6.17     | 1   |  |
| M90 7500 15 HDG | 1000               | 150               | 7.68     | 1   |  |
| M90 7502 15 HDG | 1200               | 150               | 8.91     | 1   |  |

| M90... H75      |                    | 2.0mm             |          |     |  |
|-----------------|--------------------|-------------------|----------|-----|--|
| CODE            | Width<br>a=b<br>mm | Radius<br>R<br>mm | KG<br>1m | pcs |  |
| M90 7510 20 HDG | 100                | 150               | 2.14     | 1   |  |
| M90 7515 20 HDG | 150                | 150               | 2.49     | 1   |  |
| M90 7520 20 HDG | 200                | 150               | 2.74     | 1   |  |
| M90 7525 20 HDG | 250                | 150               | 3.09     | 1   |  |
| M90 7530 20 HDG | 300                | 150               | 3.34     | 1   |  |
| M90 7540 20 HDG | 400                | 150               | 4.03     | 1   |  |
| M90 7545 20 HDG | 450                | 150               | 4.38     | 1   |  |
| M90 7550 20 HDG | 500                | 150               | 4.63     | 1   |  |
| M90 7560 20 HDG | 600                | 150               | 5.23     | 1   |  |
| M90 7570 20 HDG | 700                | 150               | 5.85     | 1   |  |
| M90 7575 20 HDG | 750                | 150               | 7.20     | 1   |  |
| M90 7580 20 HDG | 800                | 150               | 7.60     | 1   |  |
| M90 7590 20 HDG | 900                | 150               | 8.22     | 1   |  |
| M90 7500 20 HDG | 1000               | 150               | 10.23    | 1   |  |
| M90 7502 20 HDG | 1200               | 150               | 11.87    | 1   |  |

## 90° Horizontal Bend of Cable Ladder Radius:300

90° Merdiven Yatay Dönüş Elemanı R:300 - Угол кабельроста горизонтальный 90° радиус:300



Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

### Hot-Dip Galvanized



| M90R2... H75      |                    | 1.5mm             |          |     |  |
|-------------------|--------------------|-------------------|----------|-----|--|
| CODE              | Width<br>a=b<br>mm | Radius<br>R<br>mm | KG<br>1m | pcs |  |
| M90R2 7510 15 HDG | 100                | 300               | 2.73     | 1   |  |
| M90R2 7515 15 HDG | 150                | 300               | 3.03     | 1   |  |
| M90R2 7520 15 HDG | 200                | 300               | 3.32     | 1   |  |
| M90R2 7525 15 HDG | 250                | 300               | 3.62     | 1   |  |
| M90R2 7530 15 HDG | 300                | 300               | 3.92     | 1   |  |
| M90R2 7540 15 HDG | 400                | 300               | 4.52     | 1   |  |
| M90R2 7545 15 HDG | 450                | 300               | 4.82     | 1   |  |
| M90R2 7550 15 HDG | 500                | 300               | 5.12     | 1   |  |
| M90R2 7560 15 HDG | 600                | 300               | 6.27     | 1   |  |
| M90R2 7570 15 HDG | 700                | 300               | 6.96     | 1   |  |
| M90R2 7575 15 HDG | 750                | 300               | 7.30     | 1   |  |
| M90R2 7580 15 HDG | 800                | 300               | 7.65     | 1   |  |
| M90R2 7590 15 HDG | 900                | 300               | 8.34     | 1   |  |
| M90R2 7500 15 HDG | 1000               | 300               | 9.95     | 1   |  |
| M90R2 7502 15 HDG | 1200               | 300               | 11.51    | 1   |  |

| M90R2... H75      |                    | 2.0mm             |          |     |  |
|-------------------|--------------------|-------------------|----------|-----|--|
| CODE              | Width<br>a=b<br>mm | Radius<br>R<br>mm | KG<br>1m | pcs |  |
| M90R2 7510 20 HDG | 100                | 300               | 3.63     | 1   |  |
| M90R2 7515 20 HDG | 150                | 300               | 4.03     | 1   |  |
| M90R2 7520 20 HDG | 200                | 300               | 4.43     | 1   |  |
| M90R2 7525 20 HDG | 250                | 300               | 4.83     | 1   |  |
| M90R2 7530 20 HDG | 300                | 300               | 5.23     | 1   |  |
| M90R2 7540 20 HDG | 400                | 300               | 6.03     | 1   |  |
| M90R2 7545 20 HDG | 450                | 300               | 6.43     | 1   |  |
| M90R2 7550 20 HDG | 500                | 300               | 6.82     | 1   |  |
| M90R2 7560 20 HDG | 600                | 300               | 8.36     | 1   |  |
| M90R2 7570 20 HDG | 700                | 300               | 9.28     | 1   |  |
| M90R2 7575 20 HDG | 750                | 300               | 9.74     | 1   |  |
| M90R2 7580 20 HDG | 800                | 300               | 10.20    | 1   |  |
| M90R2 7590 20 HDG | 900                | 300               | 11.12    | 1   |  |
| M90R2 7500 20 HDG | 1000               | 300               | 13.26    | 1   |  |
| M90R2 7502 20 HDG | 1200               | 300               | 15.35    | 1   |  |

### M90 H75 HDG

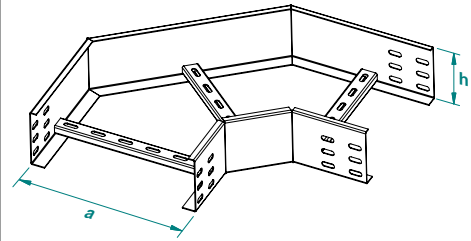

### M90R2 H75 HDG

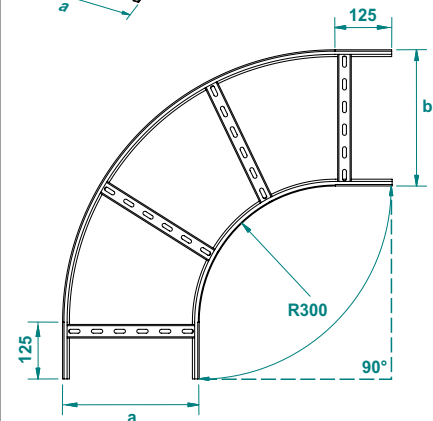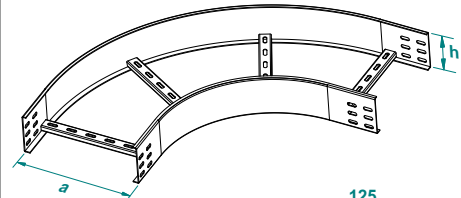

### APPLICATIONS

Cable routing

### MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method

to TS-EN 10346:2011 (PG)

SS- stainless steel AISI 304L and AISI 316L (SS)

EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: **1.5 2.0**

## 90° Horizontal Bend of Cable Ladder Radius:450

90° Merdiven Yatay Dönüş Elemanı R:450 - Угол кабельроста горизонтальный 90° радиус:450



Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

### Hot-Dip Galvanized

| M90R3... H75      |                    | 1.5mm             |           |     |  |
|-------------------|--------------------|-------------------|-----------|-----|--|
| CODE              | Width<br>a=b<br>mm | Radius<br>R<br>mm | kg<br>1pc | pcs |  |
| M90R3 7510 15 HDG | 100                | 450               | 3.42      | 1   |  |
| M90R3 7515 15 HDG | 150                | 450               | 3.72      | 1   |  |
| M90R3 7520 15 HDG | 200                | 450               | 4.02      | 1   |  |
| M90R3 7525 15 HDG | 250                | 450               | 4.55      | 1   |  |
| M90R3 7530 15 HDG | 300                | 450               | 4.89      | 1   |  |
| M90R3 7540 15 HDG | 400                | 450               | 5.58      | 1   |  |
| M90R3 7545 15 HDG | 450                | 450               | 5.93      | 1   |  |
| M90R3 7550 15 HDG | 500                | 450               | 6.27      | 1   |  |
| M90R3 7560 15 HDG | 600                | 450               | 6.96      | 1   |  |
| M90R3 7570 15 HDG | 700                | 450               | 8.30      | 1   |  |
| M90R3 7575 15 HDG | 750                | 450               | 8.69      | 1   |  |
| M90R3 7580 15 HDG | 800                | 450               | 9.08      | 1   |  |
| M90R3 7590 15 HDG | 900                | 450               | 9.86      | 1   |  |
| M90R3 7500 15 HDG | 1000               | 450               | 10.64     | 1   |  |
| M90R3 7502 15 HDG | 1200               | 450               | 13.31     | 1   |  |

| M90R3... H75      |                    | 2.0mm             |           |     |  |
|-------------------|--------------------|-------------------|-----------|-----|--|
| CODE              | Width<br>a=b<br>mm | Radius<br>R<br>mm | kg<br>1pc | pcs |  |
| M90R3 7510 20 HDG | 100                | 450               | 4.56      | 1   |  |
| M90R3 7515 20 HDG | 150                | 450               | 4.96      | 1   |  |
| M90R3 7520 20 HDG | 200                | 450               | 5.36      | 1   |  |
| M90R3 7525 20 HDG | 250                | 450               | 6.06      | 1   |  |
| M90R3 7530 20 HDG | 300                | 450               | 6.52      | 1   |  |
| M90R3 7540 20 HDG | 400                | 450               | 7.44      | 1   |  |
| M90R3 7545 20 HDG | 450                | 450               | 7.90      | 1   |  |
| M90R3 7550 20 HDG | 500                | 450               | 8.36      | 1   |  |
| M90R3 7560 20 HDG | 600                | 450               | 9.28      | 1   |  |
| M90R3 7570 20 HDG | 700                | 450               | 11.06     | 1   |  |
| M90R3 7575 20 HDG | 750                | 450               | 11.58     | 1   |  |
| M90R3 7580 20 HDG | 800                | 450               | 12.10     | 1   |  |
| M90R3 7590 20 HDG | 900                | 450               | 13.15     | 1   |  |
| M90R3 7500 20 HDG | 1000               | 450               | 14.19     | 1   |  |
| M90R3 7502 20 HDG | 1200               | 450               | 17.74     | 1   |  |

## 90° Horizontal Bend of Cable Ladder Radius:600

90° Merdiven Yatay Dönüş Elemanı R:600 - Угол кабельроста горизонтальный 90° радиус:600



Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

### Hot-Dip Galvanized



| M90R4... H75      |                    | 1.5mm             |           |     |  |
|-------------------|--------------------|-------------------|-----------|-----|--|
| CODE              | Width<br>a=b<br>mm | Radius<br>R<br>mm | kg<br>1pc | pcs |  |
| M90R4 7510 15 HDG | 100                | 600               | 4.20      | 1   |  |
| M90R4 7515 15 HDG | 150                | 600               | 4.55      | 1   |  |
| M90R4 7520 15 HDG | 200                | 600               | 4.89      | 1   |  |
| M90R4 7525 15 HDG | 250                | 600               | 5.24      | 1   |  |
| M90R4 7530 15 HDG | 300                | 600               | 5.58      | 1   |  |
| M90R4 7540 15 HDG | 400                | 600               | 6.64      | 1   |  |
| M90R4 7545 15 HDG | 450                | 600               | 7.03      | 1   |  |
| M90R4 7550 15 HDG | 500                | 600               | 7.42      | 1   |  |
| M90R4 7560 15 HDG | 600                | 600               | 8.21      | 1   |  |
| M90R4 7570 15 HDG | 700                | 600               | 8.99      | 1   |  |
| M90R4 7575 15 HDG | 750                | 600               | 10.07     | 1   |  |
| M90R4 7580 15 HDG | 800                | 600               | 10.51     | 1   |  |
| M90R4 7590 15 HDG | 900                | 600               | 11.38     | 1   |  |
| M90R4 7500 15 HDG | 1000               | 600               | 12.25     | 1   |  |
| M90R4 7502 15 HDG | 1200               | 600               | 15.10     | 1   |  |

| M90R4... H75      |                    | 2.0mm             |           |     |  |
|-------------------|--------------------|-------------------|-----------|-----|--|
| CODE              | Width<br>a=b<br>mm | Radius<br>R<br>mm | kg<br>1pc | pcs |  |
| M90R4 7510 20 HDG | 100                | 600               | 5.60      | 1   |  |
| M90R4 7515 20 HDG | 150                | 600               | 6.06      | 1   |  |
| M90R4 7520 20 HDG | 200                | 600               | 6.52      | 1   |  |
| M90R4 7525 20 HDG | 250                | 600               | 6.98      | 1   |  |
| M90R4 7530 20 HDG | 300                | 600               | 7.44      | 1   |  |
| M90R4 7540 20 HDG | 400                | 600               | 8.86      | 1   |  |
| M90R4 7545 20 HDG | 450                | 600               | 9.38      | 1   |  |
| M90R4 7550 20 HDG | 500                | 600               | 9.90      | 1   |  |
| M90R4 7560 20 HDG | 600                | 600               | 10.94     | 1   |  |
| M90R4 7570 20 HDG | 700                | 600               | 11.98     | 1   |  |
| M90R4 7575 20 HDG | 750                | 600               | 13.42     | 1   |  |
| M90R4 7580 20 HDG | 800                | 600               | 14.01     | 1   |  |
| M90R4 7590 20 HDG | 900                | 600               | 15.17     | 1   |  |
| M90R4 7500 20 HDG | 1000               | 600               | 16.34     | 1   |  |
| M90R4 7502 20 HDG | 1200               | 600               | 20.14     | 1   |  |

### M90R3 H75 HDG

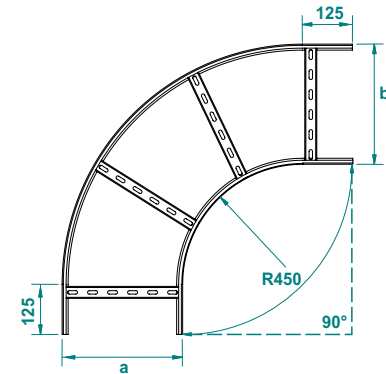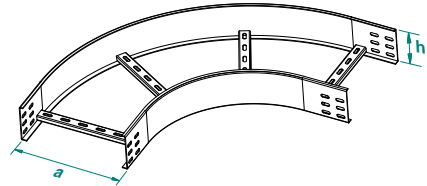

### M90R4 H75 HDG

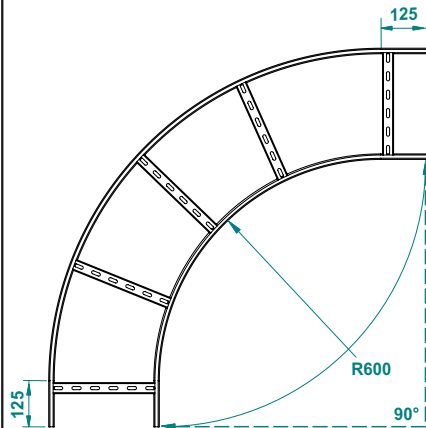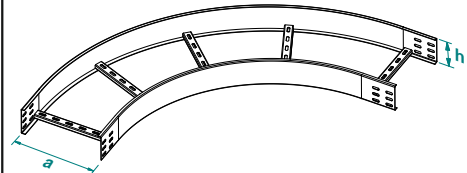

### APPLICATIONS

Cable routing

### MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method to TS-EN 10346:2011 (PG)  
SS- stainless steel AISI 304L and AISI 316L (SS)  
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0



## 60° Horizontal Bend of Cable Ladder

60° Merdiven Yatay Dönüş Elemanı - Угол кабельроста горизонтальный 60°



Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

### Hot-Dip Galvanized

| M60... H75      |                    | 1.5mm             |           |
|-----------------|--------------------|-------------------|-----------|
| CODE            | Width<br>a=b<br>mm | Radius<br>R<br>mm | kg<br>1pc |
| M60 7510 15 HDG | 100                | 150               | 1.39      |
| M60 7515 15 HDG | 150                | 150               | 1.54      |
| M60 7520 15 HDG | 200                | 150               | 1.70      |
| M60 7525 15 HDG | 250                | 150               | 1.85      |
| M60 7530 15 HDG | 300                | 150               | 2.00      |
| M60 7540 15 HDG | 400                | 150               | 2.31      |
| M60 7545 15 HDG | 450                | 150               | 2.46      |
| M60 7550 15 HDG | 500                | 150               | 2.62      |
| M60 7560 15 HDG | 600                | 150               | 3.42      |
| M60 7570 15 HDG | 700                | 150               | 3.81      |
| M60 7575 15 HDG | 750                | 150               | 4.00      |
| M60 7580 15 HDG | 800                | 150               | 4.19      |
| M60 7590 15 HDG | 900                | 150               | 4.58      |
| M60 7500 15 HDG | 1000               | 150               | 5.96      |
| M60 7502 15 HDG | 1200               | 150               | 6.90      |

| M60... H75      |                    | 2.0mm             |           |
|-----------------|--------------------|-------------------|-----------|
| CODE            | Width<br>a=b<br>mm | Radius<br>R<br>mm | kg<br>1pc |
| M60 7510 20 HDG | 100                | 150               | 1.85      |
| M60 7515 20 HDG | 150                | 150               | 2.05      |
| M60 7520 20 HDG | 200                | 150               | 2.26      |
| M60 7525 20 HDG | 250                | 150               | 2.46      |
| M60 7530 20 HDG | 300                | 150               | 2.67      |
| M60 7540 20 HDG | 400                | 150               | 3.08      |
| M60 7545 20 HDG | 450                | 150               | 3.28      |
| M60 7550 20 HDG | 500                | 150               | 3.49      |
| M60 7560 20 HDG | 600                | 150               | 4.55      |
| M60 7570 20 HDG | 700                | 150               | 5.07      |
| M60 7575 20 HDG | 750                | 150               | 5.33      |
| M60 7580 20 HDG | 800                | 150               | 5.59      |
| M60 7590 20 HDG | 900                | 150               | 6.11      |
| M60 7500 20 HDG | 1000               | 150               | 7.95      |
| M60 7502 20 HDG | 1200               | 150               | 9.20      |

## 60° Horizontal Bend of Cable Ladder Radius:300

60° Merdiven Yatay Dönüş Elemanı R:300 - Угол кабельроста горизонтальный 60° радиус:300



Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

### Hot-Dip Galvanized



| M60R2... H75      |                    | 1.5mm             |           |
|-------------------|--------------------|-------------------|-----------|
| CODE              | Width<br>a=b<br>mm | Radius<br>R<br>mm | kg<br>1pc |
| M60R2 7510 15 HDG | 100                | 300               | 2.09      |
| M60R2 7515 15 HDG | 150                | 300               | 2.31      |
| M60R2 7520 15 HDG | 200                | 300               | 2.52      |
| M60R2 7525 15 HDG | 250                | 300               | 2.74      |
| M60R2 7530 15 HDG | 300                | 300               | 2.95      |
| M60R2 7540 15 HDG | 400                | 300               | 3.38      |
| M60R2 7545 15 HDG | 450                | 300               | 3.60      |
| M60R2 7550 15 HDG | 500                | 300               | 3.81      |
| M60R2 7560 15 HDG | 600                | 300               | 4.79      |
| M60R2 7570 15 HDG | 700                | 300               | 5.32      |
| M60R2 7575 15 HDG | 750                | 300               | 5.58      |
| M60R2 7580 15 HDG | 800                | 300               | 5.84      |
| M60R2 7590 15 HDG | 900                | 300               | 6.36      |
| M60R2 7500 15 HDG | 1000               | 300               | 7.80      |
| M60R2 7502 15 HDG | 1200               | 300               | 9.02      |

| M60R2... H75      |                    | 2.0mm             |           |
|-------------------|--------------------|-------------------|-----------|
| CODE              | Width<br>a=b<br>mm | Radius<br>R<br>mm | kg<br>1pc |
| M60R2 7510 20 HDG | 100                | 300               | 2.79      |
| M60R2 7515 20 HDG | 150                | 300               | 3.08      |
| M60R2 7520 20 HDG | 200                | 300               | 3.36      |
| M60R2 7525 20 HDG | 250                | 300               | 3.65      |
| M60R2 7530 20 HDG | 300                | 300               | 3.94      |
| M60R2 7540 20 HDG | 400                | 300               | 4.51      |
| M60R2 7545 20 HDG | 450                | 300               | 4.80      |
| M60R2 7550 20 HDG | 500                | 300               | 5.08      |
| M60R2 7560 20 HDG | 600                | 300               | 6.39      |
| M60R2 7570 20 HDG | 700                | 300               | 7.09      |
| M60R2 7575 20 HDG | 750                | 300               | 7.43      |
| M60R2 7580 20 HDG | 800                | 300               | 7.78      |
| M60R2 7590 20 HDG | 900                | 300               | 8.48      |
| M60R2 7500 20 HDG | 1000               | 300               | 10.40     |
| M60R2 7502 20 HDG | 1200               | 300               | 12.03     |

### M60 H75 HDG

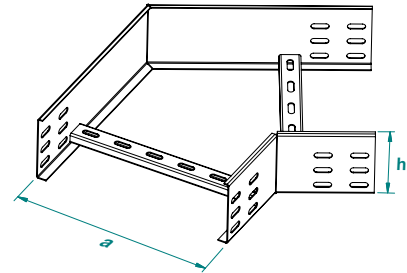

### M60R2 H75 HDG

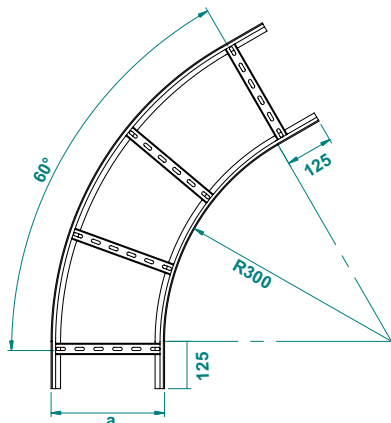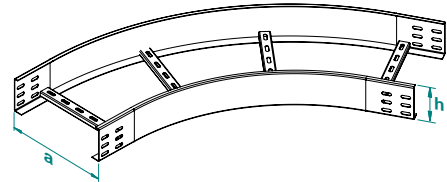

### APPLICATIONS

Cable routing

### MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method to TS-EN 10346:2011 (PG)  
SS- stainless steel AISI 304L and AISI 316L (SS)  
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0

# Cable Ladder Systems of Side Height 75



**MTK**  
MADE IN TURKEY

## 60° Horizontal Bend of Cable Ladder Radius:450

60° Merdiven Yatay Dönüş Elemanı R:450 - Угол кабельроста горизонтальный 60° радиус:450



Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8


### Hot-Dip Galvanized

| M60R3... H75      |                    | 1.5mm             |           |     |  |
|-------------------|--------------------|-------------------|-----------|-----|--|
| CODE              | Width<br>a=b<br>mm | Radius<br>R<br>mm | kg<br>1pc | pcs |  |
| M60R3 7510 15 HDG | 100                | 450               | 2.56      | 1   |  |
| M60R3 7515 15 HDG | 150                | 450               | 2.77      | 1   |  |
| M60R3 7520 15 HDG | 200                | 450               | 2.99      | 1   |  |
| M60R3 7525 15 HDG | 250                | 450               | 3.43      | 1   |  |
| M60R3 7530 15 HDG | 300                | 450               | 3.69      | 1   |  |
| M60R3 7540 15 HDG | 400                | 450               | 4.21      | 1   |  |
| M60R3 7545 15 HDG | 450                | 450               | 4.47      | 1   |  |
| M60R3 7550 15 HDG | 500                | 450               | 4.73      | 1   |  |
| M60R3 7560 15 HDG | 600                | 450               | 5.26      | 1   |  |
| M60R3 7570 15 HDG | 700                | 450               | 5.78      | 1   |  |
| M60R3 7575 15 HDG | 750                | 450               | 6.04      | 1   |  |
| M60R3 7580 15 HDG | 800                | 450               | 6.30      | 1   |  |
| M60R3 7590 15 HDG | 900                | 450               | 7.65      | 1   |  |
| M60R3 7500 15 HDG | 1000               | 450               | 8.26      | 1   |  |
| M60R3 7502 15 HDG | 1200               | 450               | 9.49      | 1   |  |

| M60R3... H75      |                    | 2.0mm             |           |     |  |
|-------------------|--------------------|-------------------|-----------|-----|--|
| CODE              | Width<br>a=b<br>mm | Radius<br>R<br>mm | kg<br>1pc | pcs |  |
| M60R3 7510 20 HDG | 100                | 450               | 3.41      | 1   |  |
| M60R3 7515 20 HDG | 150                | 450               | 3.69      | 1   |  |
| M60R3 7520 20 HDG | 200                | 450               | 3.98      | 1   |  |
| M60R3 7525 20 HDG | 250                | 450               | 4.57      | 1   |  |
| M60R3 7530 20 HDG | 300                | 450               | 4.92      | 1   |  |
| M60R3 7540 20 HDG | 400                | 450               | 5.62      | 1   |  |
| M60R3 7545 20 HDG | 450                | 450               | 5.96      | 1   |  |
| M60R3 7550 20 HDG | 500                | 450               | 6.31      | 1   |  |
| M60R3 7560 20 HDG | 600                | 450               | 7.01      | 1   |  |
| M60R3 7570 20 HDG | 700                | 450               | 7.70      | 1   |  |
| M60R3 7575 20 HDG | 750                | 450               | 8.05      | 1   |  |
| M60R3 7580 20 HDG | 800                | 450               | 8.40      | 1   |  |
| M60R3 7590 20 HDG | 900                | 450               | 10.19     | 1   |  |
| M60R3 7500 20 HDG | 1000               | 450               | 11.01     | 1   |  |
| M60R3 7502 20 HDG | 1200               | 450               | 12.65     | 1   |  |

## 60° Horizontal Bend of Cable Ladder Radius:600

60° Merdiven Yatay Dönüş Elemanı R:600 - Угол кабельроста горизонтальный 60° радиус:600

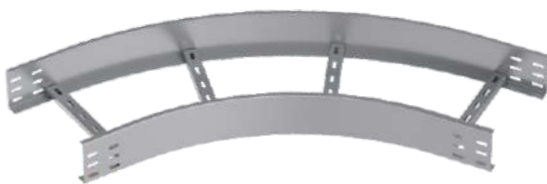

Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

### Hot-Dip Galvanized



| M60R4... H75      |                    | 1.5mm             |           |     |  |
|-------------------|--------------------|-------------------|-----------|-----|--|
| CODE              | Width<br>a=b<br>mm | Radius<br>R<br>mm | kg<br>1pc | pcs |  |
| M60R4 7510 15 HDG | 100                | 600               | 3.11      | 1   |  |
| M60R4 7515 15 HDG | 150                | 600               | 3.37      | 1   |  |
| M60R4 7520 15 HDG | 200                | 600               | 3.63      | 1   |  |
| M60R4 7525 15 HDG | 250                | 600               | 3.89      | 1   |  |
| M60R4 7530 15 HDG | 300                | 600               | 4.15      | 1   |  |
| M60R4 7540 15 HDG | 400                | 600               | 4.68      | 1   |  |
| M60R4 7545 15 HDG | 450                | 600               | 4.94      | 1   |  |
| M60R4 7550 15 HDG | 500                | 600               | 5.20      | 1   |  |
| M60R4 7560 15 HDG | 600                | 600               | 6.27      | 1   |  |
| M60R4 7570 15 HDG | 700                | 600               | 6.88      | 1   |  |
| M60R4 7575 15 HDG | 750                | 600               | 7.19      | 1   |  |
| M60R4 7580 15 HDG | 800                | 600               | 7.50      | 1   |  |
| M60R4 7590 15 HDG | 900                | 600               | 8.11      | 1   |  |
| M60R4 7500 15 HDG | 1000               | 600               | 9.64      | 1   |  |
| M60R4 7502 15 HDG | 1200               | 600               | 11.05     | 1   |  |

| M60R4... H75      |                    | 2.0mm             |           |     |  |
|-------------------|--------------------|-------------------|-----------|-----|--|
| CODE              | Width<br>a=b<br>mm | Radius<br>R<br>mm | kg<br>1pc | pcs |  |
| M60R4 7510 20 HDG | 100                | 600               | 4.15      | 1   |  |
| M60R4 7515 20 HDG | 150                | 600               | 4.49      | 1   |  |
| M60R4 7520 20 HDG | 200                | 600               | 4.84      | 1   |  |
| M60R4 7525 20 HDG | 250                | 600               | 5.19      | 1   |  |
| M60R4 7530 20 HDG | 300                | 600               | 5.54      | 1   |  |
| M60R4 7540 20 HDG | 400                | 600               | 6.23      | 1   |  |
| M60R4 7545 20 HDG | 450                | 600               | 6.58      | 1   |  |
| M60R4 7550 20 HDG | 500                | 600               | 6.93      | 1   |  |
| M60R4 7560 20 HDG | 600                | 600               | 8.36      | 1   |  |
| M60R4 7570 20 HDG | 700                | 600               | 9.18      | 1   |  |
| M60R4 7575 20 HDG | 750                | 600               | 9.58      | 1   |  |
| M60R4 7580 20 HDG | 800                | 600               | 9.99      | 1   |  |
| M60R4 7590 20 HDG | 900                | 600               | 10.81     | 1   |  |
| M60R4 7500 20 HDG | 1000               | 600               | 12.85     | 1   |  |
| M60R4 7502 20 HDG | 1200               | 600               | 14.73     | 1   |  |

### M60R3 H75 HDG

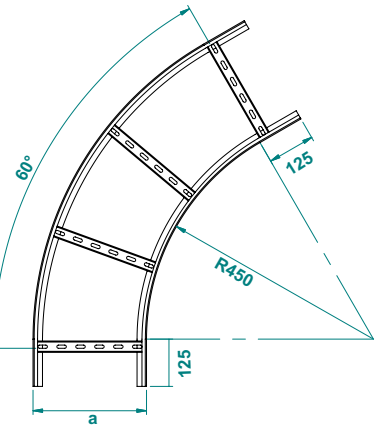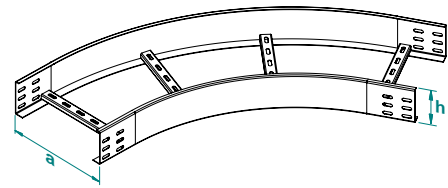

### M60R4 H75 HDG

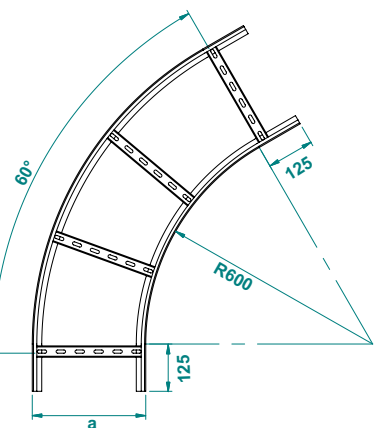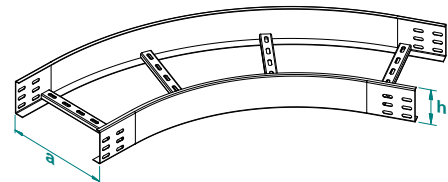

### APPLICATIONS

Cable routing

### MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method to TS-EN 10346:2011 (PG)  
SS- stainless steel AISI 304L and AISI 316L (SS)  
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0

## 45° Horizontal Bend of Cable Ladder

45° Merdiven Yatay Dönüş Elemanı - Угол кабельроста горизонтальный 45°



### Hot-Dip Galvanized

| M45... H75      |                    | 1.5mm             |           |     |  |
|-----------------|--------------------|-------------------|-----------|-----|--|
| CODE            | Width<br>a=b<br>mm | Radius<br>R<br>mm | KG<br>1pc | pcs |  |
| M45 7510 15 HDG | 100                | 150               | 1.01      | 1   |  |
| M45 7515 15 HDG | 150                | 150               | 1.16      | 1   |  |
| M45 7520 15 HDG | 200                | 150               | 1.30      | 1   |  |
| M45 7525 15 HDG | 250                | 150               | 1.43      | 1   |  |
| M45 7530 15 HDG | 300                | 150               | 1.57      | 1   |  |
| M45 7540 15 HDG | 400                | 150               | 1.84      | 1   |  |
| M45 7545 15 HDG | 450                | 150               | 1.99      | 1   |  |
| M45 7550 15 HDG | 500                | 150               | 2.13      | 1   |  |
| M45 7560 15 HDG | 600                | 150               | 2.48      | 1   |  |
| M45 7570 15 HDG | 700                | 150               | 2.70      | 1   |  |
| M45 7575 15 HDG | 750                | 150               | 2.87      | 1   |  |
| M45 7580 15 HDG | 800                | 150               | 3.00      | 1   |  |
| M45 7590 15 HDG | 900                | 150               | 3.25      | 1   |  |
| M45 7500 15 HDG | 1000               | 150               | 4.45      | 1   |  |
| M45 7502 15 HDG | 1200               | 150               | 5.17      | 1   |  |

Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

| M45... H75      |                    | 2.0mm             |           |     |  |
|-----------------|--------------------|-------------------|-----------|-----|--|
| CODE            | Width<br>a=b<br>mm | Radius<br>R<br>mm | KG<br>1pc | pcs |  |
| M45 7510 20 HDG | 100                | 150               | 1.34      | 1   |  |
| M45 7515 20 HDG | 150                | 150               | 1.54      | 1   |  |
| M45 7520 20 HDG | 200                | 150               | 1.73      | 1   |  |
| M45 7525 20 HDG | 250                | 150               | 1.91      | 1   |  |
| M45 7530 20 HDG | 300                | 150               | 2.09      | 1   |  |
| M45 7540 20 HDG | 400                | 150               | 2.45      | 1   |  |
| M45 7545 20 HDG | 450                | 150               | 2.66      | 1   |  |
| M45 7550 20 HDG | 500                | 150               | 2.84      | 1   |  |
| M45 7560 20 HDG | 600                | 150               | 3.31      | 1   |  |
| M45 7570 20 HDG | 700                | 150               | 3.60      | 1   |  |
| M45 7575 20 HDG | 750                | 150               | 3.82      | 1   |  |
| M45 7580 20 HDG | 800                | 150               | 4.00      | 1   |  |
| M45 7590 20 HDG | 900                | 150               | 4.33      | 1   |  |
| M45 7500 20 HDG | 1000               | 150               | 5.94      | 1   |  |
| M45 7502 20 HDG | 1200               | 150               | 6.89      | 1   |  |

## 45° Horizontal Bend of Cable Ladder

45° Merdiven Yatay Dönüş Elemanı - Угол кабельроста горизонтальный 45°



### Hot-Dip Galvanized



| M45R2... H75      |                    | 1.5mm             |           |     |  |
|-------------------|--------------------|-------------------|-----------|-----|--|
| CODE              | Width<br>a=b<br>mm | Radius<br>R<br>mm | KG<br>1pc | pcs |  |
| M45R2 7510 15 HDG | 100                | 300               | 1.73      | 1   |  |
| M45R2 7515 15 HDG | 150                | 300               | 1.88      | 1   |  |
| M45R2 7520 15 HDG | 200                | 300               | 2.22      | 1   |  |
| M45R2 7525 15 HDG | 250                | 300               | 2.41      | 1   |  |
| M45R2 7530 15 HDG | 300                | 300               | 2.61      | 1   |  |
| M45R2 7540 15 HDG | 400                | 300               | 3.00      | 1   |  |
| M45R2 7545 15 HDG | 450                | 300               | 3.19      | 1   |  |
| M45R2 7550 15 HDG | 500                | 300               | 3.39      | 1   |  |
| M45R2 7560 15 HDG | 600                | 300               | 3.78      | 1   |  |
| M45R2 7570 15 HDG | 700                | 300               | 4.17      | 1   |  |
| M45R2 7575 15 HDG | 750                | 300               | 4.37      | 1   |  |
| M45R2 7580 15 HDG | 800                | 300               | 4.56      | 1   |  |
| M45R2 7590 15 HDG | 900                | 300               | 4.95      | 1   |  |
| M45R2 7500 15 HDG | 1000               | 300               | 6.26      | 1   |  |
| M45R2 7502 15 HDG | 1200               | 300               | 7.23      | 1   |  |

Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

| M45R2... H75      |                    | 2.0mm             |           |     |  |
|-------------------|--------------------|-------------------|-----------|-----|--|
| CODE              | Width<br>a=b<br>mm | Radius<br>R<br>mm | KG<br>1pc | pcs |  |
| M45R2 7510 20 HDG | 100                | 300               | 2.31      | 1   |  |
| M45R2 7515 20 HDG | 150                | 300               | 2.51      | 1   |  |
| M45R2 7520 20 HDG | 200                | 300               | 2.95      | 1   |  |
| M45R2 7525 20 HDG | 250                | 300               | 3.21      | 1   |  |
| M45R2 7530 20 HDG | 300                | 300               | 3.47      | 1   |  |
| M45R2 7540 20 HDG | 400                | 300               | 4.00      | 1   |  |
| M45R2 7545 20 HDG | 450                | 300               | 4.26      | 1   |  |
| M45R2 7550 20 HDG | 500                | 300               | 4.52      | 1   |  |
| M45R2 7560 20 HDG | 600                | 300               | 5.04      | 1   |  |
| M45R2 7570 20 HDG | 700                | 300               | 5.56      | 1   |  |
| M45R2 7575 20 HDG | 750                | 300               | 5.82      | 1   |  |
| M45R2 7580 20 HDG | 800                | 300               | 6.08      | 1   |  |
| M45R2 7590 20 HDG | 900                | 300               | 6.60      | 1   |  |
| M45R2 7500 20 HDG | 1000               | 300               | 8.35      | 1   |  |
| M45R2 7502 20 HDG | 1200               | 300               | 9.64      | 1   |  |

### M45 H75 HDG

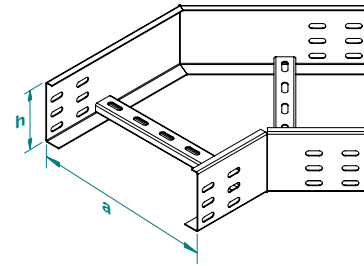

### M45R2 H80 HDG

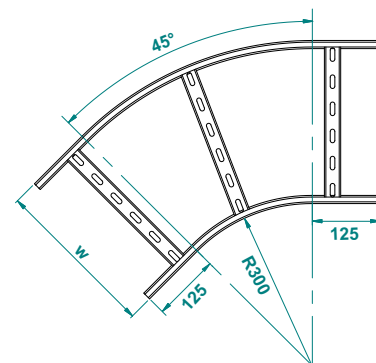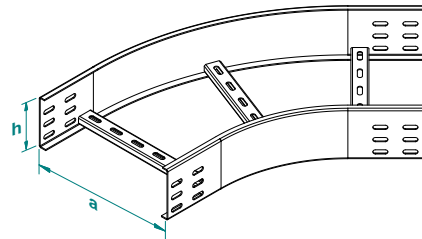

### APPLICATIONS

Cable routing

### MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method to TS-EN 10346:2011 (PG)  
SS- stainless steel AISI 304L and AISI 316L (SS)  
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0



# Cable Ladder Systems of Side Height 75



**MTK**  
MADE IN TURKEY

## 45° Horizontal Bend of Cable Ladder Radius:450

45° Merdiven Yatay Dönüş Elemanı R:450 - Угол кабельроста горизонтальный 45° радиус:450



Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized

| M45R3... H75      |                    |                   |           |     | M45R3... H75      |                    |                   |           |     |
|-------------------|--------------------|-------------------|-----------|-----|-------------------|--------------------|-------------------|-----------|-----|
| 1.5mm             |                    |                   |           |     | 2.0mm             |                    |                   |           |     |
| CODE              | Width<br>a=b<br>mm | Radius<br>R<br>mm | kg<br>1pc | pcs | CODE              | Width<br>a=b<br>mm | Radius<br>R<br>mm | kg<br>1pc | pcs |
| M45R3 7510 15 HDG | 100                | 450               | 2.17      | 1   | M45R3 7510 20 HDG | 100                | 450               | 2.89      | 1   |
| M45R3 7515 15 HDG | 150                | 450               | 2.37      | 1   | M45R3 7515 20 HDG | 150                | 450               | 3.15      | 1   |
| M45R3 7520 15 HDG | 200                | 450               | 2.56      | 1   | M45R3 7520 20 HDG | 200                | 450               | 3.42      | 1   |
| M45R3 7525 15 HDG | 250                | 450               | 2.76      | 1   | M45R3 7525 20 HDG | 250                | 450               | 3.68      | 1   |
| M45R3 7530 15 HDG | 300                | 450               | 2.95      | 1   | M45R3 7530 20 HDG | 300                | 450               | 3.94      | 1   |
| M45R3 7540 15 HDG | 400                | 450               | 3.35      | 1   | M45R3 7540 20 HDG | 400                | 450               | 4.46      | 1   |
| M45R3 7545 15 HDG | 450                | 450               | 3.54      | 1   | M45R3 7545 20 HDG | 450                | 450               | 4.72      | 1   |
| M45R3 7550 15 HDG | 500                | 450               | 3.74      | 1   | M45R3 7550 20 HDG | 500                | 450               | 4.98      | 1   |
| M45R3 7560 15 HDG | 600                | 450               | 4.13      | 1   | M45R3 7560 20 HDG | 600                | 450               | 5.50      | 1   |
| M45R3 7570 15 HDG | 700                | 450               | 5.16      | 1   | M45R3 7570 20 HDG | 700                | 450               | 6.88      | 1   |
| M45R3 7575 15 HDG | 750                | 450               | 5.40      | 1   | M45R3 7575 20 HDG | 750                | 450               | 7.20      | 1   |
| M45R3 7580 15 HDG | 800                | 450               | 5.64      | 1   | M45R3 7580 20 HDG | 800                | 450               | 7.52      | 1   |
| M45R3 7590 15 HDG | 900                | 450               | 6.13      | 1   | M45R3 7590 20 HDG | 900                | 450               | 8.17      | 1   |
| M45R3 7500 15 HDG | 1000               | 450               | 6.61      | 1   | M45R3 7500 20 HDG | 1000               | 450               | 8.81      | 1   |
| M45R3 7502 15 HDG | 1200               | 450               | 7.58      | 1   | M45R3 7502 20 HDG | 1200               | 450               | 10.10     | 1   |

## 45° Horizontal Bend of Cable Ladder Radius:600

45° Merdiven Yatay Dönüş Elemanı R:600 - Угол кабельроста горизонтальный 45° радиус:600





Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8



Hot-Dip Galvanized

| M45R4... H75      |                    |                   |           |     | M45R4... H75      |                    |                   |           |     |
|-------------------|--------------------|-------------------|-----------|-----|-------------------|--------------------|-------------------|-----------|-----|
| 1.5mm             |                    |                   |           |     | 2.0mm             |                    |                   |           |     |
| CODE              | Width<br>a=b<br>mm | Radius<br>R<br>mm | kg<br>1pc | pcs | CODE              | Width<br>a=b<br>mm | Radius<br>R<br>mm | kg<br>1pc | pcs |
| M45R4 7510 15 HDG | 100                | 600               | 2.52      | 1   | M45R4 7510 20 HDG | 100                | 600               | 3.36      | 1   |
| M45R4 7515 15 HDG | 150                | 600               | 2.71      | 1   | M45R4 7515 20 HDG | 150                | 600               | 3.62      | 1   |
| M45R4 7520 15 HDG | 200                | 600               | 2.91      | 1   | M45R4 7520 20 HDG | 200                | 600               | 3.88      | 1   |
| M45R4 7525 15 HDG | 250                | 600               | 3.11      | 1   | M45R4 7525 20 HDG | 250                | 600               | 4.14      | 1   |
| M45R4 7530 15 HDG | 300                | 600               | 3.30      | 1   | M45R4 7530 20 HDG | 300                | 600               | 4.40      | 1   |
| M45R4 7540 15 HDG | 400                | 600               | 4.06      | 1   | M45R4 7540 20 HDG | 400                | 600               | 5.41      | 1   |
| M45R4 7545 15 HDG | 450                | 600               | 4.30      | 1   | M45R4 7545 20 HDG | 450                | 600               | 5.73      | 1   |
| M45R4 7550 15 HDG | 500                | 600               | 4.54      | 1   | M45R4 7550 20 HDG | 500                | 600               | 6.05      | 1   |
| M45R4 7560 15 HDG | 600                | 600               | 5.02      | 1   | M45R4 7560 20 HDG | 600                | 600               | 6.70      | 1   |
| M45R4 7570 15 HDG | 700                | 600               | 5.51      | 1   | M45R4 7570 20 HDG | 700                | 600               | 7.34      | 1   |
| M45R4 7575 15 HDG | 750                | 600               | 5.75      | 1   | M45R4 7575 20 HDG | 750                | 600               | 7.66      | 1   |
| M45R4 7580 15 HDG | 800                | 600               | 5.99      | 1   | M45R4 7580 20 HDG | 800                | 600               | 7.99      | 1   |
| M45R4 7590 15 HDG | 900                | 600               | 6.47      | 1   | M45R4 7590 20 HDG | 900                | 600               | 8.63      | 1   |
| M45R4 7500 15 HDG | 1000               | 600               | 7.88      | 1   | M45R4 7500 20 HDG | 1000               | 600               | 10.50     | 1   |
| M45R4 7502 15 HDG | 1200               | 600               | 9.02      | 1   | M45R4 7502 20 HDG | 1200               | 600               | 12.03     | 1   |

### M45R3 H75 HDG

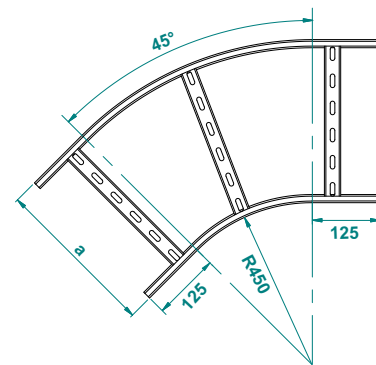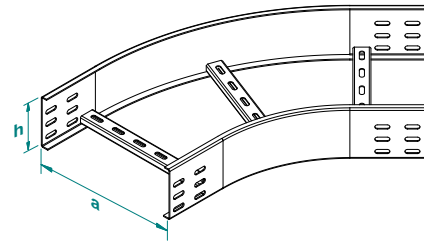

### M45R4 H75 HDG

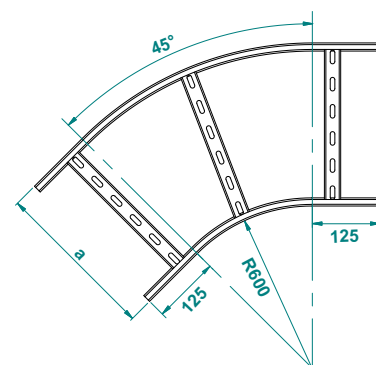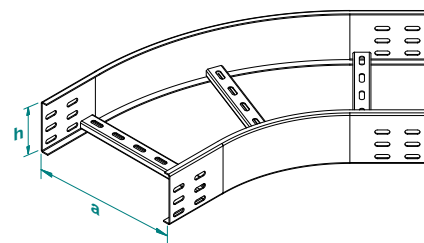

### APPLICATIONS

Cable routing

### MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method  
to TS-EN 10346:2011 (PG)  
SS- stainless steel AISI 304L and AISI 316L (SS)  
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0


# Cable Ladder Systems of Side Height 75



**MTK**  
MADE IN TURKEY

## 30° Horizontal Bend of Cable Ladder

30° Merdiven Yatay Dönüş Elemanı - Угол кабельроста горизонтальный 30°

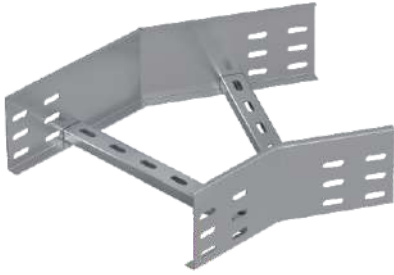

Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

### Hot-Dip Galvanized

| M30... H75      |                    | 1.5mm             |           |     |  |
|-----------------|--------------------|-------------------|-----------|-----|--|
| CODE            | Width<br>a=b<br>mm | Radius<br>R<br>mm | kg<br>1pc | pcs |  |
| M30 7510 15 HDG | 100                | 150               | 0.97      | 1   |  |
| M30 7515 15 HDG | 150                | 150               | 1.09      | 1   |  |
| M30 7520 15 HDG | 200                | 150               | 1.20      | 1   |  |
| M30 7525 15 HDG | 250                | 150               | 1.32      | 1   |  |
| M30 7530 15 HDG | 300                | 150               | 1.45      | 1   |  |
| M30 7540 15 HDG | 400                | 150               | 1.68      | 1   |  |
| M30 7545 15 HDG | 450                | 150               | 1.80      | 1   |  |
| M30 7550 15 HDG | 500                | 150               | 1.91      | 1   |  |
| M30 7560 15 HDG | 600                | 150               | 2.15      | 1   |  |
| M30 7570 15 HDG | 700                | 150               | 2.39      | 1   |  |
| M30 7575 15 HDG | 750                | 150               | 2.50      | 1   |  |
| M30 7580 15 HDG | 800                | 150               | 2.62      | 1   |  |
| M30 7590 15 HDG | 900                | 150               | 2.86      | 1   |  |
| M30 7500 15 HDG | 1000               | 150               | 3.09      | 1   |  |
| M30 7502 15 HDG | 1200               | 150               | 3.57      | 1   |  |

| M30... H75      |                    | 2.0mm             |           |     |  |
|-----------------|--------------------|-------------------|-----------|-----|--|
| CODE            | Width<br>a=b<br>mm | Radius<br>R<br>mm | kg<br>1pc | pcs |  |
| M30 7510 20 HDG | 100                | 150               | 1.29      | 1   |  |
| M30 7515 20 HDG | 150                | 150               | 1.45      | 1   |  |
| M30 7520 20 HDG | 200                | 150               | 1.60      | 1   |  |
| M30 7525 20 HDG | 250                | 150               | 1.76      | 1   |  |
| M30 7530 20 HDG | 300                | 150               | 1.93      | 1   |  |
| M30 7540 20 HDG | 400                | 150               | 2.24      | 1   |  |
| M30 7545 20 HDG | 450                | 150               | 2.40      | 1   |  |
| M30 7550 20 HDG | 500                | 150               | 2.55      | 1   |  |
| M30 7560 20 HDG | 600                | 150               | 2.86      | 1   |  |
| M30 7570 20 HDG | 700                | 150               | 3.19      | 1   |  |
| M30 7575 20 HDG | 750                | 150               | 3.33      | 1   |  |
| M30 7580 20 HDG | 800                | 150               | 3.50      | 1   |  |
| M30 7590 20 HDG | 900                | 150               | 3.81      | 1   |  |
| M30 7500 20 HDG | 1000               | 150               | 4.12      | 1   |  |
| M30 7502 20 HDG | 1200               | 150               | 4.76      | 1   |  |

## 30° Horizontal Bend of Cable Ladder Radius:300

30° Merdiven Yatay Dönüş Elemanı R:300 - Угол кабельроста горизонтальный 30° радиус:300



Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

### Hot-Dip Galvanized



| M30R2... H75      |                    | 1.5mm             |           |     |  |
|-------------------|--------------------|-------------------|-----------|-----|--|
| CODE              | Width<br>a=b<br>mm | Radius<br>R<br>mm | kg<br>1pc | pcs |  |
| M30R2 7510 15 HDG | 100                | 300               | 1.46      | 1   |  |
| M30R2 7515 15 HDG | 150                | 300               | 1.59      | 1   |  |
| M30R2 7520 15 HDG | 200                | 300               | 1.72      | 1   |  |
| M30R2 7525 15 HDG | 250                | 300               | 1.85      | 1   |  |
| M30R2 7530 15 HDG | 300                | 300               | 1.99      | 1   |  |
| M30R2 7540 15 HDG | 400                | 300               | 2.25      | 1   |  |
| M30R2 7545 15 HDG | 450                | 300               | 2.38      | 1   |  |
| M30R2 7550 15 HDG | 500                | 300               | 2.51      | 1   |  |
| M30R2 7560 15 HDG | 600                | 300               | 3.32      | 1   |  |
| M30R2 7570 15 HDG | 700                | 300               | 3.67      | 1   |  |
| M30R2 7575 15 HDG | 750                | 300               | 3.85      | 1   |  |
| M30R2 7580 15 HDG | 800                | 300               | 4.02      | 1   |  |
| M30R2 7590 15 HDG | 900                | 300               | 4.38      | 1   |  |
| M30R2 7500 15 HDG | 1000               | 300               | 4.73      | 1   |  |
| M30R2 7502 15 HDG | 1200               | 300               | 5.43      | 1   |  |

| M30R2... H75      |                    | 2.0mm             |           |     |  |
|-------------------|--------------------|-------------------|-----------|-----|--|
| CODE              | Width<br>a=b<br>mm | Radius<br>R<br>mm | kg<br>1pc | pcs |  |
| M30R2 7510 20 HDG | 100                | 300               | 1.95      | 1   |  |
| M30R2 7515 20 HDG | 150                | 300               | 2.12      | 1   |  |
| M30R2 7520 20 HDG | 200                | 300               | 2.30      | 1   |  |
| M30R2 7525 20 HDG | 250                | 300               | 2.47      | 1   |  |
| M30R2 7530 20 HDG | 300                | 300               | 2.65      | 1   |  |
| M30R2 7540 20 HDG | 400                | 300               | 2.99      | 1   |  |
| M30R2 7545 20 HDG | 450                | 300               | 3.17      | 1   |  |
| M30R2 7550 20 HDG | 500                | 300               | 3.34      | 1   |  |
| M30R2 7560 20 HDG | 600                | 300               | 4.42      | 1   |  |
| M30R2 7570 20 HDG | 700                | 300               | 4.89      | 1   |  |
| M30R2 7575 20 HDG | 750                | 300               | 5.13      | 1   |  |
| M30R2 7580 20 HDG | 800                | 300               | 5.36      | 1   |  |
| M30R2 7590 20 HDG | 900                | 300               | 5.83      | 1   |  |
| M30R2 7500 20 HDG | 1000               | 300               | 6.30      | 1   |  |
| M30R2 7502 20 HDG | 1200               | 300               | 7.24      | 1   |  |

### M30 H75 HDG

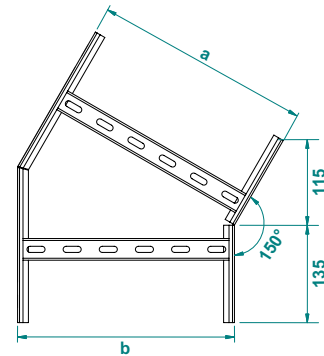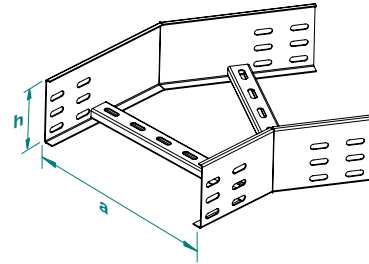

### M30R2 H75 HDG

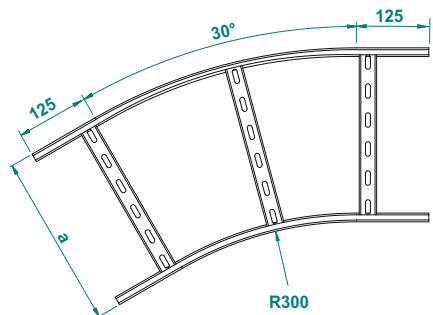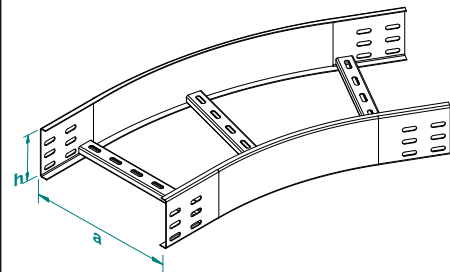

### APPLICATIONS

Cable routing

### MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method to TS-EN 10346:2011 (PG)  
SS- stainless steel AISI 304L and AISI 316L (SS)  
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0

# Cable Ladder Systems of Side Height 75



**MTK**  
MADE IN TURKEY

## 30° Horizontal Bend of Cable Ladder Radius:450

30° Merdiven Yatay Dönüş Elemanı R:450 - Угол кабельроста горизонтальный 30° радиус:450



Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

### Hot-Dip Galvanized

| M30R3... H75      |                    | 1.5mm             |      |   |  |
|-------------------|--------------------|-------------------|------|---|--|
| CODE              | Width<br>a=b<br>mm | Radius<br>R<br>mm |      |   |  |
| M30R3 7510 15 HDG | 100                | 450               | 1.69 | 1 |  |
| M30R3 7515 15 HDG | 150                | 450               | 1.83 | 1 |  |
| M30R3 7520 15 HDG | 200                | 450               | 1.96 | 1 |  |
| M30R3 7525 15 HDG | 250                | 450               | 2.32 | 1 |  |
| M30R3 7530 15 HDG | 300                | 450               | 2.49 | 1 |  |
| M30R3 7540 15 HDG | 400                | 450               | 2.84 | 1 |  |
| M30R3 7545 15 HDG | 450                | 450               | 3.02 | 1 |  |
| M30R3 7550 15 HDG | 500                | 450               | 3.20 | 1 |  |
| M30R3 7560 15 HDG | 600                | 450               | 3.55 | 1 |  |
| M30R3 7570 15 HDG | 700                | 450               | 3.90 | 1 |  |
| M30R3 7575 15 HDG | 750                | 450               | 4.08 | 1 |  |
| M30R3 7580 15 HDG | 800                | 450               | 4.25 | 1 |  |
| M30R3 7590 15 HDG | 900                | 450               | 4.61 | 1 |  |
| M30R3 7500 15 HDG | 1000               | 450               | 4.96 | 1 |  |
| M30R3 7502 15 HDG | 1200               | 450               | 5.66 | 1 |  |

| M30R3... H75      |                    | 2.0mm             |      |   |  |
|-------------------|--------------------|-------------------|------|---|--|
| CODE              | Width<br>a=b<br>mm | Radius<br>R<br>mm |      |   |  |
| M30R3 7510 20 HDG | 100                | 450               | 2.26 | 1 |  |
| M30R3 7515 20 HDG | 150                | 450               | 2.43 | 1 |  |
| M30R3 7520 20 HDG | 200                | 450               | 2.61 | 1 |  |
| M30R3 7525 20 HDG | 250                | 450               | 3.09 | 1 |  |
| M30R3 7530 20 HDG | 300                | 450               | 3.32 | 1 |  |
| M30R3 7540 20 HDG | 400                | 450               | 3.79 | 1 |  |
| M30R3 7545 20 HDG | 450                | 450               | 4.03 | 1 |  |
| M30R3 7550 20 HDG | 500                | 450               | 4.26 | 1 |  |
| M30R3 7560 20 HDG | 600                | 450               | 4.73 | 1 |  |
| M30R3 7570 20 HDG | 700                | 450               | 5.20 | 1 |  |
| M30R3 7575 20 HDG | 750                | 450               | 5.44 | 1 |  |
| M30R3 7580 20 HDG | 800                | 450               | 5.67 | 1 |  |
| M30R3 7590 20 HDG | 900                | 450               | 6.14 | 1 |  |
| M30R3 7500 20 HDG | 1000               | 450               | 6.61 | 1 |  |
| M30R3 7502 20 HDG | 1200               | 450               | 7.55 | 1 |  |

## 30° Horizontal Bend of Cable Ladder Radius:600

30° Merdiven Yatay Dönüş Elemanı R:600 - Угол кабельроста горизонтальный 30° радиус:600



Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

### Hot-Dip Galvanized



| M30R4... H75      |                    | 1.5mm             |      |   |  |
|-------------------|--------------------|-------------------|------|---|--|
| CODE              | Width<br>a=b<br>mm | Radius<br>R<br>mm |      |   |  |
| M30R4 7510 15 HDG | 100                | 600               | 2.02 | 1 |  |
| M30R4 7515 15 HDG | 150                | 600               | 2.19 | 1 |  |
| M30R4 7520 15 HDG | 200                | 600               | 2.37 | 1 |  |
| M30R4 7525 15 HDG | 250                | 600               | 2.55 | 1 |  |
| M30R4 7530 15 HDG | 300                | 600               | 2.72 | 1 |  |
| M30R4 7540 15 HDG | 400                | 600               | 3.08 | 1 |  |
| M30R4 7545 15 HDG | 450                | 600               | 3.25 | 1 |  |
| M30R4 7550 15 HDG | 500                | 600               | 3.43 | 1 |  |
| M30R4 7560 15 HDG | 600                | 600               | 3.78 | 1 |  |
| M30R4 7570 15 HDG | 700                | 600               | 4.13 | 1 |  |
| M30R4 7575 15 HDG | 750                | 600               | 4.31 | 1 |  |
| M30R4 7580 15 HDG | 800                | 600               | 4.49 | 1 |  |
| M30R4 7590 15 HDG | 900                | 600               | 4.84 | 1 |  |
| M30R4 7500 15 HDG | 1000               | 600               | 5.19 | 1 |  |
| M30R4 7502 15 HDG | 1200               | 600               | 7.00 | 1 |  |

| M30R4... H75      |                    | 2.0mm             |      |   |  |
|-------------------|--------------------|-------------------|------|---|--|
| CODE              | Width<br>a=b<br>mm | Radius<br>R<br>mm |      |   |  |
| M30R4 7510 20 HDG | 100                | 600               | 2.69 | 1 |  |
| M30R4 7515 20 HDG | 150                | 600               | 2.92 | 1 |  |
| M30R4 7520 20 HDG | 200                | 600               | 3.16 | 1 |  |
| M30R4 7525 20 HDG | 250                | 600               | 3.39 | 1 |  |
| M30R4 7530 20 HDG | 300                | 600               | 3.63 | 1 |  |
| M30R4 7540 20 HDG | 400                | 600               | 4.10 | 1 |  |
| M30R4 7545 20 HDG | 450                | 600               | 4.33 | 1 |  |
| M30R4 7550 20 HDG | 500                | 600               | 4.57 | 1 |  |
| M30R4 7560 20 HDG | 600                | 600               | 5.04 | 1 |  |
| M30R4 7570 20 HDG | 700                | 600               | 5.51 | 1 |  |
| M30R4 7575 20 HDG | 750                | 600               | 5.74 | 1 |  |
| M30R4 7580 20 HDG | 800                | 600               | 5.98 | 1 |  |
| M30R4 7590 20 HDG | 900                | 600               | 6.45 | 1 |  |
| M30R4 7500 20 HDG | 1000               | 600               | 6.92 | 1 |  |
| M30R4 7502 20 HDG | 1200               | 600               | 9.33 | 1 |  |

### M30R3 H75 HDG

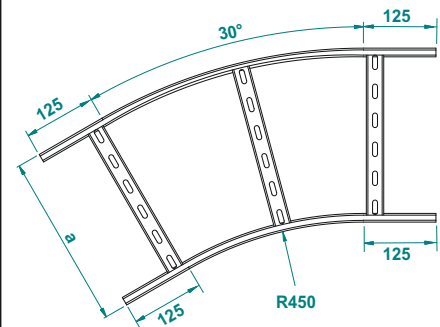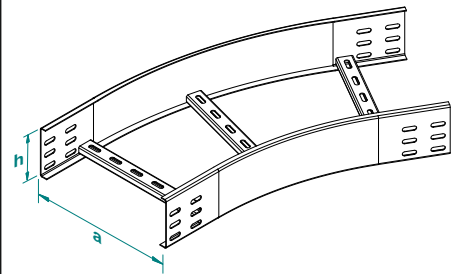

### M30R4 H75 HDG

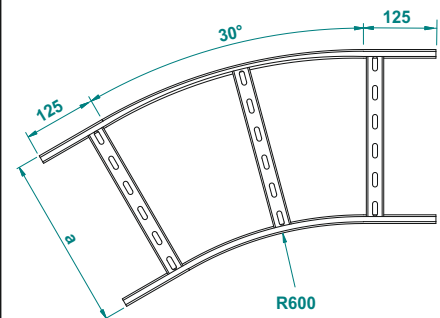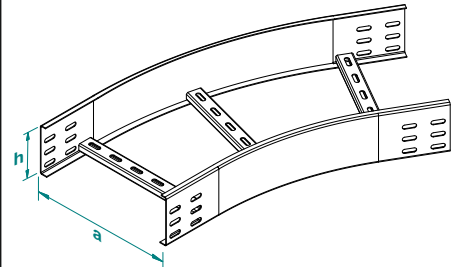

### APPLICATIONS

Cable routing

### MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method to TS-EN 10346:2011 (PG)  
SS- stainless steel AISI 304L and AISI 316L (SS)  
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: **1.5 2.0**

# Cable Ladder Systems of Side Height 75



**MTK**  
MADE IN TURKEY

## Tee Horizontal Bend of Cable Ladder

"T" Merdiven Yatay Dönüş Elemanı - T-отвод кабельроста горизонтальный



Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

### Hot-Dip Galvanized

| MT... H75      |                      | 1.5mm             |           |     |  |
|----------------|----------------------|-------------------|-----------|-----|--|
| CODE           | Width<br>a=b=c<br>mm | Radius<br>R<br>mm | kg<br>1pc | pcs |  |
| MT 7510 15 HDG | 100                  | 150               | 2.08      | 1   |  |
| MT 7515 15 HDG | 150                  | 150               | 2.27      | 1   |  |
| MT 7520 15 HDG | 200                  | 150               | 2.46      | 1   |  |
| MT 7525 15 HDG | 250                  | 150               | 3.19      | 1   |  |
| MT 7530 15 HDG | 300                  | 150               | 3.46      | 1   |  |
| MT 7540 15 HDG | 400                  | 150               | 4.01      | 1   |  |
| MT 7545 15 HDG | 450                  | 150               | 4.29      | 1   |  |
| MT 7550 15 HDG | 500                  | 150               | 4.56      | 1   |  |
| MT 7560 15 HDG | 600                  | 150               | 5.11      | 1   |  |
| MT 7570 15 HDG | 700                  | 150               | 6.31      | 1   |  |
| MT 7575 15 HDG | 750                  | 150               | 6.63      | 1   |  |
| MT 7580 15 HDG | 800                  | 150               | 6.94      | 1   |  |
| MT 7590 15 HDG | 900                  | 150               | 7.57      | 1   |  |
| MT 7500 15 HDG | 1000                 | 150               | 9.11      | 1   |  |
| MT 7502 15 HDG | 1200                 | 150               | 10.62     | 1   |  |

| MT... H75      |                      | 2.0mm             |           |     |  |
|----------------|----------------------|-------------------|-----------|-----|--|
| CODE           | Width<br>a=b=c<br>mm | Radius<br>R<br>mm | kg<br>1pc | pcs |  |
| MT 7510 20 HDG | 100                  | 150               | 2.77      | 1   |  |
| MT 7515 20 HDG | 150                  | 150               | 3.03      | 1   |  |
| MT 7520 20 HDG | 200                  | 150               | 3.28      | 1   |  |
| MT 7525 20 HDG | 250                  | 150               | 4.25      | 1   |  |
| MT 7530 20 HDG | 300                  | 150               | 4.62      | 1   |  |
| MT 7540 20 HDG | 400                  | 150               | 5.35      | 1   |  |
| MT 7545 20 HDG | 450                  | 150               | 5.71      | 1   |  |
| MT 7550 20 HDG | 500                  | 150               | 6.08      | 1   |  |
| MT 7560 20 HDG | 600                  | 150               | 6.81      | 1   |  |
| MT 7570 20 HDG | 700                  | 150               | 8.42      | 1   |  |
| MT 7575 20 HDG | 750                  | 150               | 8.84      | 1   |  |
| MT 7580 20 HDG | 800                  | 150               | 9.26      | 1   |  |
| MT 7590 20 HDG | 900                  | 150               | 10.10     | 1   |  |
| MT 7500 20 HDG | 1000                 | 150               | 12.15     | 1   |  |
| MT 7502 20 HDG | 1200                 | 150               | 14.15     | 1   |  |

## Tee Horizontal Bend of Cable Ladder Radius:300

"T" Merdiven Yatay Dönüş Elemanı R:300 - T-отвод кабельроста горизонтальный радиус:300



Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

### Hot-Dip Galvanized



| MTR2... H75      |                      | 1.5mm             |           |     |  |
|------------------|----------------------|-------------------|-----------|-----|--|
| CODE             | Width<br>a=b=c<br>mm | Radius<br>R<br>mm | kg<br>1pc | pcs |  |
| MTR2 7510 15 HDG | 100                  | 300               | 4.55      | 1   |  |
| MTR2 7515 15 HDG | 150                  | 300               | 4.99      | 1   |  |
| MTR2 7520 15 HDG | 200                  | 300               | 5.43      | 1   |  |
| MTR2 7525 15 HDG | 250                  | 300               | 5.64      | 1   |  |
| MTR2 7530 15 HDG | 300                  | 300               | 5.99      | 1   |  |
| MTR2 7540 15 HDG | 400                  | 300               | 6.73      | 1   |  |
| MTR2 7545 15 HDG | 450                  | 300               | 7.08      | 1   |  |
| MTR2 7550 15 HDG | 500                  | 300               | 7.43      | 1   |  |
| MTR2 7560 15 HDG | 600                  | 300               | 8.87      | 1   |  |
| MTR2 7570 15 HDG | 700                  | 300               | 9.75      | 1   |  |
| MTR2 7575 15 HDG | 750                  | 300               | 10.14     | 1   |  |
| MTR2 7580 15 HDG | 800                  | 300               | 10.54     | 1   |  |
| MTR2 7590 15 HDG | 900                  | 300               | 11.33     | 1   |  |
| MTR2 7500 15 HDG | 1000                 | 300               | 13.82     | 1   |  |
| MTR2 7502 15 HDG | 1200                 | 300               | 15.58     | 1   |  |

| MTR2... H75      |                      | 2.0mm             |           |     |  |
|------------------|----------------------|-------------------|-----------|-----|--|
| CODE             | Width<br>a=b=c<br>mm | Radius<br>R<br>mm | kg<br>1pc | pcs |  |
| MTR2 7510 20 HDG | 100                  | 300               | 6.06      | 1   |  |
| MTR2 7515 20 HDG | 150                  | 300               | 6.65      | 1   |  |
| MTR2 7520 20 HDG | 200                  | 300               | 7.24      | 1   |  |
| MTR2 7525 20 HDG | 250                  | 300               | 7.52      | 1   |  |
| MTR2 7530 20 HDG | 300                  | 300               | 7.99      | 1   |  |
| MTR2 7540 20 HDG | 400                  | 300               | 8.98      | 1   |  |
| MTR2 7545 20 HDG | 450                  | 300               | 9.44      | 1   |  |
| MTR2 7550 20 HDG | 500                  | 300               | 9.91      | 1   |  |
| MTR2 7560 20 HDG | 600                  | 300               | 11.82     | 1   |  |
| MTR2 7570 20 HDG | 700                  | 300               | 13.00     | 1   |  |
| MTR2 7575 20 HDG | 750                  | 300               | 13.52     | 1   |  |
| MTR2 7580 20 HDG | 800                  | 300               | 14.05     | 1   |  |
| MTR2 7590 20 HDG | 900                  | 300               | 15.10     | 1   |  |
| MTR2 7500 20 HDG | 1000                 | 300               | 18.42     | 1   |  |
| MTR2 7502 20 HDG | 1200                 | 300               | 20.77     | 1   |  |

### MT H75 HDG

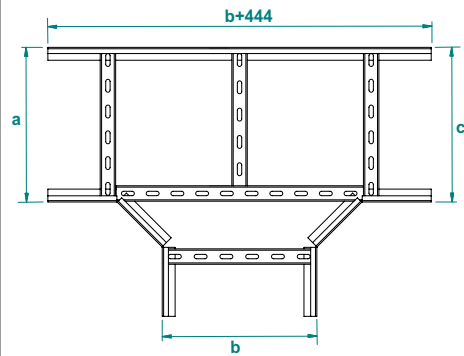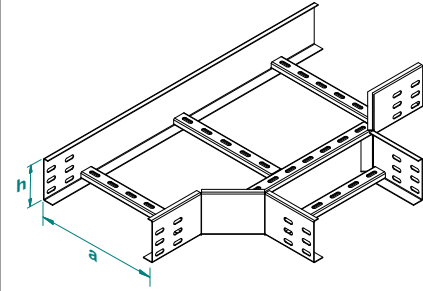

### MTR2 H75 HDG

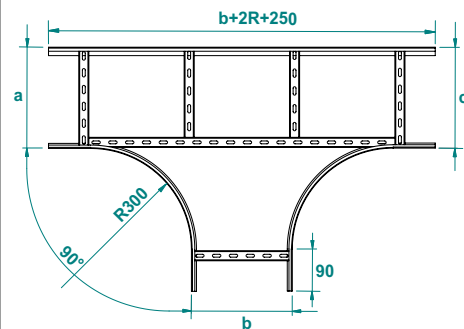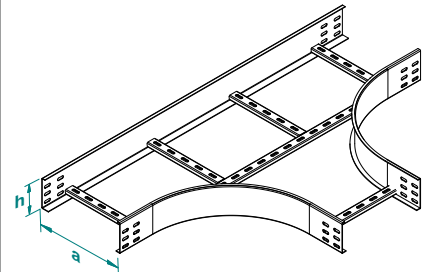

### APPLICATIONS

Cable routing

### MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method  
to TS-EN 10346:2011 (PG)  
SS- stainless steel AISI 304L and AISI 316L (SS)  
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: **1.5 2.0**


# Cable Ladder Systems of Side Height 75



**MTK**  
MADE IN TURKEY

## Tee Horizontal Bend of Cable Ladder Radius:450

"T" Merdiven Yatay Dönüş Elemanı R:450 - T-отвод кабельроста горизонтальный радиус:450

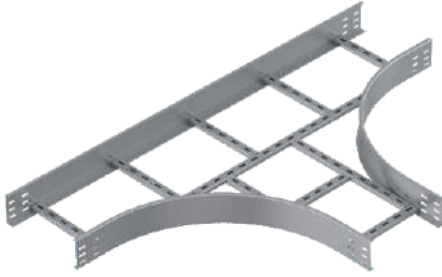

Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8


### Hot-Dip Galvanized

| MTR3... H75      |                      | 1.5mm             |           |     |  |
|------------------|----------------------|-------------------|-----------|-----|--|
| CODE             | Width<br>a=b=c<br>mm | Radius<br>R<br>mm | kg<br>1pc | pcs |  |
| MTR3 7510 15 HDG | 100                  | 450               | 5.86      | 1   |  |
| MTR3 7515 15 HDG | 150                  | 450               | 6.21      | 1   |  |
| MTR3 7520 15 HDG | 200                  | 450               | 7.07      | 1   |  |
| MTR3 7525 15 HDG | 250                  | 450               | 8.11      | 1   |  |
| MTR3 7530 15 HDG | 300                  | 450               | 8.73      | 1   |  |
| MTR3 7540 15 HDG | 400                  | 450               | 9.61      | 1   |  |
| MTR3 7545 15 HDG | 450                  | 450               | 10.05     | 1   |  |
| MTR3 7550 15 HDG | 500                  | 450               | 10.49     | 1   |  |
| MTR3 7560 15 HDG | 600                  | 450               | 11.88     | 1   |  |
| MTR3 7570 15 HDG | 700                  | 450               | 12.86     | 1   |  |
| MTR3 7575 15 HDG | 750                  | 450               | 13.16     | 1   |  |
| MTR3 7580 15 HDG | 800                  | 450               | 13.97     | 1   |  |
| MTR3 7590 15 HDG | 900                  | 450               | 15.22     | 1   |  |
| MTR3 7500 15 HDG | 1000                 | 450               | 17.02     | 1   |  |
| MTR3 7502 15 HDG | 1200                 | 450               | 19.24     | 1   |  |

| MTR3... H75      |                      | 2.0mm             |           |     |  |
|------------------|----------------------|-------------------|-----------|-----|--|
| CODE             | Width<br>a=b=c<br>mm | Radius<br>R<br>mm | kg<br>1pc | pcs |  |
| MTR3 7510 20 HDG | 100                  | 450               | 7.82      | 1   |  |
| MTR3 7515 20 HDG | 150                  | 450               | 8.28      | 1   |  |
| MTR3 7520 20 HDG | 200                  | 450               | 9.42      | 1   |  |
| MTR3 7525 20 HDG | 250                  | 450               | 10.81     | 1   |  |
| MTR3 7530 20 HDG | 300                  | 450               | 11.64     | 1   |  |
| MTR3 7540 20 HDG | 400                  | 450               | 12.82     | 1   |  |
| MTR3 7545 20 HDG | 450                  | 450               | 13.40     | 1   |  |
| MTR3 7550 20 HDG | 500                  | 450               | 13.99     | 1   |  |
| MTR3 7560 20 HDG | 600                  | 450               | 15.84     | 1   |  |
| MTR3 7570 20 HDG | 700                  | 450               | 17.14     | 1   |  |
| MTR3 7575 20 HDG | 750                  | 450               | 17.54     | 1   |  |
| MTR3 7580 20 HDG | 800                  | 450               | 18.62     | 1   |  |
| MTR3 7590 20 HDG | 900                  | 450               | 20.29     | 1   |  |
| MTR3 7500 20 HDG | 1000                 | 450               | 22.69     | 1   |  |
| MTR3 7502 20 HDG | 1200                 | 450               | 25.65     | 1   |  |

## Tee Horizontal Bend of Cable Ladder Radius:600

"T" Merdiven Yatay Dönüş Elemanı R:600 - T-отвод кабельроста горизонтальный радиус:600

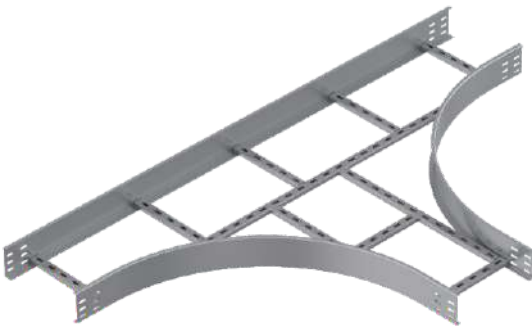

Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

### Hot-Dip Galvanized



| MTR4... H75      |                      | 1.5mm             |           |     |  |
|------------------|----------------------|-------------------|-----------|-----|--|
| CODE             | Width<br>a=b=c<br>mm | Radius<br>R<br>mm | kg<br>1pc | pcs |  |
| MTR4 7510 15 HDG | 100                  | 600               | 7.46      | 1   |  |
| MTR4 7515 15 HDG | 150                  | 600               | 8.72      | 1   |  |
| MTR4 7520 15 HDG | 200                  | 600               | 9.17      | 1   |  |
| MTR4 7525 15 HDG | 250                  | 600               | 9.59      | 1   |  |
| MTR4 7530 15 HDG | 300                  | 600               | 10.42     | 1   |  |
| MTR4 7540 15 HDG | 400                  | 600               | 11.62     | 1   |  |
| MTR4 7545 15 HDG | 450                  | 600               | 12.11     | 1   |  |
| MTR4 7550 15 HDG | 500                  | 600               | 12.59     | 1   |  |
| MTR4 7560 15 HDG | 600                  | 600               | 13.57     | 1   |  |
| MTR4 7570 15 HDG | 700                  | 600               | 14.54     | 1   |  |
| MTR4 7575 15 HDG | 750                  | 600               | 15.03     | 1   |  |
| MTR4 7580 15 HDG | 800                  | 600               | 16.11     | 1   |  |
| MTR4 7590 15 HDG | 900                  | 600               | 17.82     | 1   |  |
| MTR4 7500 15 HDG | 1000                 | 600               | 18.89     | 1   |  |
| MTR4 7502 15 HDG | 1200                 | 600               | 21.02     | 1   |  |

| MTR4... H75      |                      | 2.0mm             |           |     |  |
|------------------|----------------------|-------------------|-----------|-----|--|
| CODE             | Width<br>a=b=c<br>mm | Radius<br>R<br>mm | kg<br>1pc | pcs |  |
| MTR4 7510 20 HDG | 100                  | 600               | 9.94      | 1   |  |
| MTR4 7515 20 HDG | 150                  | 600               | 11.63     | 1   |  |
| MTR4 7520 20 HDG | 200                  | 600               | 12.22     | 1   |  |
| MTR4 7525 20 HDG | 250                  | 600               | 12.78     | 1   |  |
| MTR4 7530 20 HDG | 300                  | 600               | 13.89     | 1   |  |
| MTR4 7540 20 HDG | 400                  | 600               | 15.49     | 1   |  |
| MTR4 7545 20 HDG | 450                  | 600               | 16.14     | 1   |  |
| MTR4 7550 20 HDG | 500                  | 600               | 16.79     | 1   |  |
| MTR4 7560 20 HDG | 600                  | 600               | 18.09     | 1   |  |
| MTR4 7570 20 HDG | 700                  | 600               | 19.39     | 1   |  |
| MTR4 7575 20 HDG | 750                  | 600               | 20.03     | 1   |  |
| MTR4 7580 20 HDG | 800                  | 600               | 21.48     | 1   |  |
| MTR4 7590 20 HDG | 900                  | 600               | 23.76     | 1   |  |
| MTR4 7500 20 HDG | 1000                 | 600               | 25.18     | 1   |  |
| MTR4 7502 20 HDG | 1200                 | 600               | 28.02     | 1   |  |

### MTR3 H75 HDG

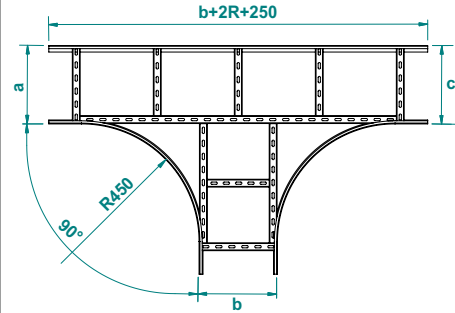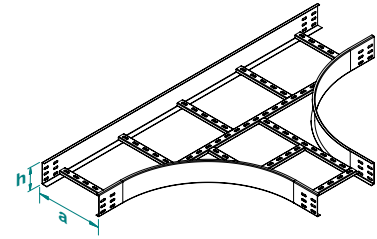

### MTR4 H75 HDG

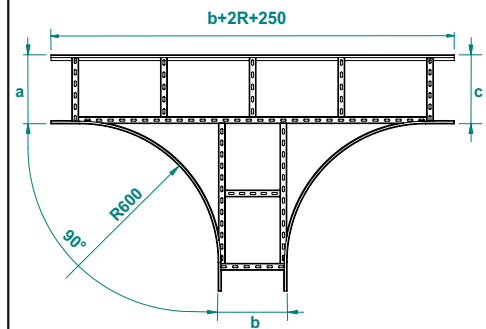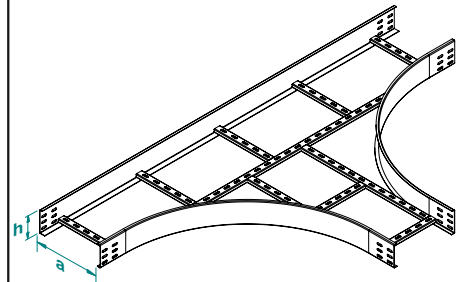

### APPLICATIONS

Cable routing

### MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method  
to TS-EN 10346:2011 (PG)  
SS- stainless steel AISI 304L and AISI 316L (SS)  
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0




# Cable Ladder Systems of Side Height 75



**MTK**  
MADE IN TURKEY

## Cross Bend of Cable Ladder

Dörtlülü Merdiven Dönüş Elemanı - Крестовина кабельроста

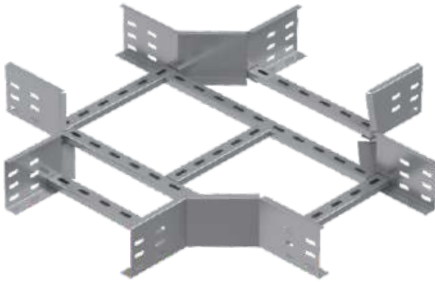

Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8


### Hot-Dip Galvanized

| MD... H75      |                        | 1.5mm             |           |   |  |
|----------------|------------------------|-------------------|-----------|---|--|
| CODE           | Width<br>a=b=c=d<br>mm | Radius<br>R<br>mm | kg<br>1pc |   |  |
| MD 7510 15 HDG | 100                    | 150               | 2.50      | 1 |  |
| MD 7515 15 HDG | 150                    | 150               | 2.67      | 1 |  |
| MD 7520 15 HDG | 200                    | 150               | 2.83      | 1 |  |
| MD 7525 15 HDG | 250                    | 150               | 3.66      | 1 |  |
| MD 7530 15 HDG | 300                    | 150               | 4.15      | 1 |  |
| MD 7540 15 HDG | 400                    | 150               | 4.73      | 1 |  |
| MD 7545 15 HDG | 450                    | 150               | 5.02      | 1 |  |
| MD 7550 15 HDG | 500                    | 150               | 5.30      | 1 |  |
| MD 7560 15 HDG | 600                    | 150               | 6.50      | 1 |  |
| MD 7570 15 HDG | 700                    | 150               | 7.74      | 1 |  |
| MD 7575 15 HDG | 750                    | 150               | 8.19      | 1 |  |
| MD 7580 15 HDG | 800                    | 150               | 8.52      | 1 |  |
| MD 7590 15 HDG | 900                    | 150               | 10.17     | 1 |  |
| MD 7500 15 HDG | 1000                   | 150               | 11.16     | 1 |  |
| MD 7502 15 HDG | 1200                   | 150               | 14.74     | 1 |  |

| MD... H75      |                        | 2.0mm             |           |   |  |
|----------------|------------------------|-------------------|-----------|---|--|
| CODE           | Width<br>a=b=c=d<br>mm | Radius<br>R<br>mm | kg<br>1pc |   |  |
| MD 7510 20 HDG | 100                    | 150               | 3.33      | 1 |  |
| MD 7515 20 HDG | 150                    | 150               | 3.55      | 1 |  |
| MD 7520 20 HDG | 200                    | 150               | 3.77      | 1 |  |
| MD 7525 20 HDG | 250                    | 150               | 4.87      | 1 |  |
| MD 7530 20 HDG | 300                    | 150               | 5.53      | 1 |  |
| MD 7540 20 HDG | 400                    | 150               | 6.30      | 1 |  |
| MD 7545 20 HDG | 450                    | 150               | 6.69      | 1 |  |
| MD 7550 20 HDG | 500                    | 150               | 7.07      | 1 |  |
| MD 7560 20 HDG | 600                    | 150               | 8.66      | 1 |  |
| MD 7570 20 HDG | 700                    | 150               | 10.31     | 1 |  |
| MD 7575 20 HDG | 750                    | 150               | 10.92     | 1 |  |
| MD 7580 20 HDG | 800                    | 150               | 11.36     | 1 |  |
| MD 7590 20 HDG | 900                    | 150               | 13.55     | 1 |  |
| MD 7500 20 HDG | 1000                   | 150               | 14.87     | 1 |  |
| MD 7502 20 HDG | 1200                   | 150               | 19.65     | 1 |  |

## Cross Bend of Cable Ladder Radius:300

Dörtlülü Merdiven Dönüş Elemanı R:300 - Крестовина кабельроста радиус:300

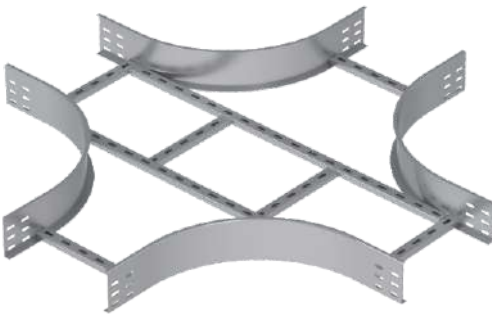

Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

### Hot-Dip Galvanized



| MDR2... H75      |                        | 1.5mm             |           |   |  |
|------------------|------------------------|-------------------|-----------|---|--|
| CODE             | Width<br>a=b=c=d<br>mm | Radius<br>R<br>mm | kg<br>1pc |   |  |
| MDR2 7510 15 HDG | 100                    | 300               | 5.91      | 1 |  |
| MDR2 7515 15 HDG | 150                    | 300               | 6.19      | 1 |  |
| MDR2 7520 15 HDG | 200                    | 300               | 6.74      | 1 |  |
| MDR2 7525 15 HDG | 250                    | 300               | 7.11      | 1 |  |
| MDR2 7530 15 HDG | 300                    | 300               | 7.47      | 1 |  |
| MDR2 7540 15 HDG | 400                    | 300               | 8.30      | 1 |  |
| MDR2 7545 15 HDG | 450                    | 300               | 8.67      | 1 |  |
| MDR2 7550 15 HDG | 500                    | 300               | 9.03      | 1 |  |
| MDR2 7560 15 HDG | 600                    | 300               | 11.79     | 1 |  |
| MDR2 7570 15 HDG | 700                    | 300               | 12.71     | 1 |  |
| MDR2 7575 15 HDG | 750                    | 300               | 13.17     | 1 |  |
| MDR2 7580 15 HDG | 800                    | 300               | 13.72     | 1 |  |
| MDR2 7590 15 HDG | 900                    | 300               | 15.10     | 1 |  |
| MDR2 7500 15 HDG | 1000                   | 300               | 18.95     | 1 |  |
| MDR2 7502 15 HDG | 1200                   | 300               | 21.02     | 1 |  |

| MDR2... H75      |                        | 2.0mm             |           |   |  |
|------------------|------------------------|-------------------|-----------|---|--|
| CODE             | Width<br>a=b=c=d<br>mm | Radius<br>R<br>mm | kg<br>1pc |   |  |
| MDR2 7510 20 HDG | 100                    | 300               | 7.88      | 1 |  |
| MDR2 7515 20 HDG | 150                    | 300               | 8.25      | 1 |  |
| MDR2 7520 20 HDG | 200                    | 300               | 8.98      | 1 |  |
| MDR2 7525 20 HDG | 250                    | 300               | 9.47      | 1 |  |
| MDR2 7530 20 HDG | 300                    | 300               | 9.96      | 1 |  |
| MDR2 7540 20 HDG | 400                    | 300               | 11.06     | 1 |  |
| MDR2 7545 20 HDG | 450                    | 300               | 11.55     | 1 |  |
| MDR2 7550 20 HDG | 500                    | 300               | 12.04     | 1 |  |
| MDR2 7560 20 HDG | 600                    | 300               | 15.72     | 1 |  |
| MDR2 7570 20 HDG | 700                    | 300               | 16.94     | 1 |  |
| MDR2 7575 20 HDG | 750                    | 300               | 17.56     | 1 |  |
| MDR2 7580 20 HDG | 800                    | 300               | 18.29     | 1 |  |
| MDR2 7590 20 HDG | 900                    | 300               | 20.13     | 1 |  |
| MDR2 7500 20 HDG | 1000                   | 300               | 25.27     | 1 |  |
| MDR2 7502 20 HDG | 1200                   | 300               | 28.03     | 1 |  |

### MD H75 HDG

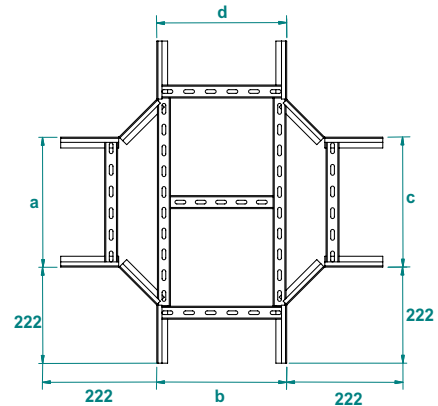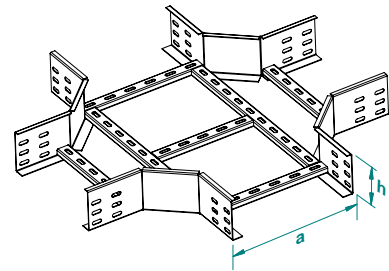

### MDR2 H75 HDG

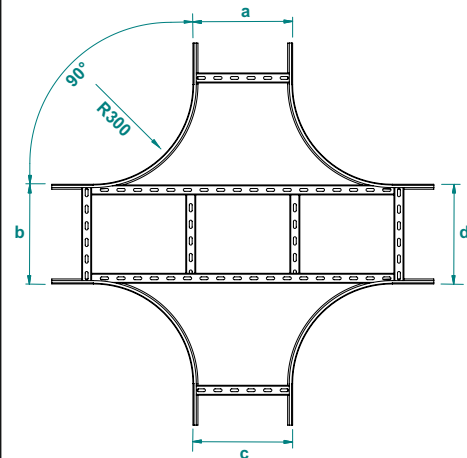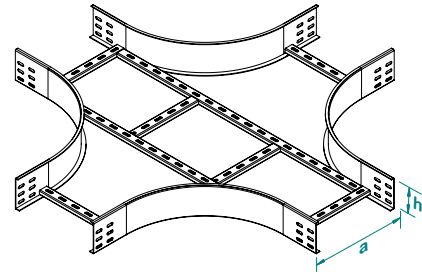

### APPLICATIONS

Cable routing

### MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method  
to TS-EN 10346:2011 (PG)  
SS- stainless steel AISI 304L and AISI 316L (SS)  
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0


# Cable Ladder Systems of Side Height 75



**MTK**  
MADE IN TURKEY

## Cross Bend of Cable Ladder Radius:450

Dörtlülü Merdiven Dönüş Elemanı R:450 - Крестовина кабельроста радиус:450

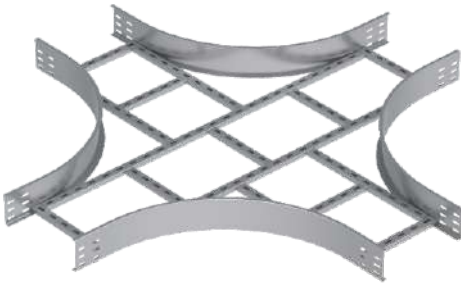

Important!


To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized

| MDR3... H75      |                        |                   |           |     |  | MDR3... H75      |                        |                   |           |     |  |
|------------------|------------------------|-------------------|-----------|-----|--|------------------|------------------------|-------------------|-----------|-----|--|
|                  |                        |                   |           |     |  |                  |                        |                   |           |     |  |
| CODE             | Width<br>a=b=c=d<br>mm | Radius<br>R<br>mm | kg<br>1pc | pcs |  | CODE             | Width<br>a=b=c=d<br>mm | Radius<br>R<br>mm | kg<br>1pc | pcs |  |
| MDR3 7510 15 HDG | 100                    | 450               | 7.62      | 1   |  | MDR3 7510 20 HDG | 100                    | 450               | 10.15     | 1   |  |
| MDR3 7515 15 HDG | 150                    | 450               | 9.22      | 1   |  | MDR3 7515 20 HDG | 150                    | 450               | 12.30     | 1   |  |
| MDR3 7520 15 HDG | 200                    | 450               | 9.73      | 1   |  | MDR3 7520 20 HDG | 200                    | 450               | 12.97     | 1   |  |
| MDR3 7525 15 HDG | 250                    | 450               | 11.06     | 1   |  | MDR3 7525 20 HDG | 250                    | 450               | 14.75     | 1   |  |
| MDR3 7530 15 HDG | 300                    | 450               | 11.75     | 1   |  | MDR3 7530 20 HDG | 300                    | 450               | 15.66     | 1   |  |
| MDR3 7540 15 HDG | 400                    | 450               | 12.76     | 1   |  | MDR3 7540 20 HDG | 400                    | 450               | 17.01     | 1   |  |
| MDR3 7545 15 HDG | 450                    | 450               | 13.27     | 1   |  | MDR3 7545 20 HDG | 450                    | 450               | 17.69     | 1   |  |
| MDR3 7550 15 HDG | 500                    | 450               | 15.01     | 1   |  | MDR3 7550 20 HDG | 500                    | 450               | 20.01     | 1   |  |
| MDR3 7560 15 HDG | 600                    | 450               | 16.11     | 1   |  | MDR3 7560 20 HDG | 600                    | 450               | 21.48     | 1   |  |
| MDR3 7570 15 HDG | 700                    | 450               | 17.77     | 1   |  | MDR3 7570 20 HDG | 700                    | 450               | 23.69     | 1   |  |
| MDR3 7575 15 HDG | 750                    | 450               | 18.36     | 1   |  | MDR3 7575 20 HDG | 750                    | 450               | 24.48     | 1   |  |
| MDR3 7580 15 HDG | 800                    | 450               | 19.79     | 1   |  | MDR3 7580 20 HDG | 800                    | 450               | 26.38     | 1   |  |
| MDR3 7590 15 HDG | 900                    | 450               | 22.50     | 1   |  | MDR3 7590 20 HDG | 900                    | 450               | 29.99     | 1   |  |
| MDR3 7500 15 HDG | 1000                   | 450               | 23.78     | 1   |  | MDR3 7500 20 HDG | 1000                   | 450               | 31.71     | 1   |  |
| MDR3 7502 15 HDG | 1200                   | 450               | 27.32     | 1   |  | MDR3 7502 20 HDG | 1200                   | 450               | 36.42     | 1   |  |

## Cross Bend of Cable Ladder Radius:600

Dörtlülü Merdiven Dönüş Elemanı R:600 - Крестовина кабельроста радиус:600

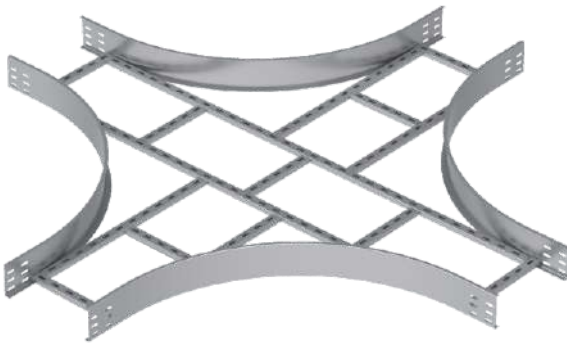



Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8



Hot-Dip Galvanized

| MDR4... H75      |                        |                   |           |     |  | MDR4... H75      |                        |                   |           |     |  |
|------------------|------------------------|-------------------|-----------|-----|--|------------------|------------------------|-------------------|-----------|-----|--|
|                  |                        |                   |           |     |  |                  |                        |                   |           |     |  |
| CODE             | Width<br>a=b=c=d<br>mm | Radius<br>R<br>mm | kg<br>1pc | pcs |  | CODE             | Width<br>a=b=c=d<br>mm | Radius<br>R<br>mm | kg<br>1pc | pcs |  |
| MDR4 7510 15 HDG | 100                    | 600               | 9.87      | 1   |  | MDR4 7510 20 HDG | 100                    | 600               | 13.16     | 1   |  |
| MDR4 7515 15 HDG | 150                    | 600               | 11.99     | 1   |  | MDR4 7515 20 HDG | 150                    | 600               | 15.98     | 1   |  |
| MDR4 7520 15 HDG | 200                    | 600               | 12.54     | 1   |  | MDR4 7520 20 HDG | 200                    | 600               | 16.71     | 1   |  |
| MDR4 7525 15 HDG | 250                    | 600               | 13.00     | 1   |  | MDR4 7525 20 HDG | 250                    | 600               | 17.33     | 1   |  |
| MDR4 7530 15 HDG | 300                    | 600               | 14.28     | 1   |  | MDR4 7530 20 HDG | 300                    | 600               | 19.04     | 1   |  |
| MDR4 7540 15 HDG | 400                    | 600               | 15.57     | 1   |  | MDR4 7540 20 HDG | 400                    | 600               | 20.75     | 1   |  |
| MDR4 7545 15 HDG | 450                    | 600               | 16.12     | 1   |  | MDR4 7545 20 HDG | 450                    | 600               | 21.49     | 1   |  |
| MDR4 7550 15 HDG | 500                    | 600               | 18.14     | 1   |  | MDR4 7550 20 HDG | 500                    | 600               | 24.18     | 1   |  |
| MDR4 7560 15 HDG | 600                    | 600               | 19.33     | 1   |  | MDR4 7560 20 HDG | 600                    | 600               | 25.78     | 1   |  |
| MDR4 7570 15 HDG | 700                    | 600               | 20.53     | 1   |  | MDR4 7570 20 HDG | 700                    | 600               | 27.37     | 1   |  |
| MDR4 7575 15 HDG | 750                    | 600               | 21.72     | 1   |  | MDR4 7575 20 HDG | 750                    | 600               | 28.96     | 1   |  |
| MDR4 7580 15 HDG | 800                    | 600               | 23.37     | 1   |  | MDR4 7580 20 HDG | 800                    | 600               | 31.16     | 1   |  |
| MDR4 7590 15 HDG | 900                    | 600               | 26.50     | 1   |  | MDR4 7590 20 HDG | 900                    | 600               | 35.33     | 1   |  |
| MDR4 7500 15 HDG | 1000                   | 600               | 27.87     | 1   |  | MDR4 7500 20 HDG | 1000                   | 600               | 37.16     | 1   |  |
| MDR4 7502 15 HDG | 1200                   | 600               | 30.68     | 1   |  | MDR4 7502 20 HDG | 1200                   | 600               | 40.90     | 1   |  |

### MDR3 H75 HDG

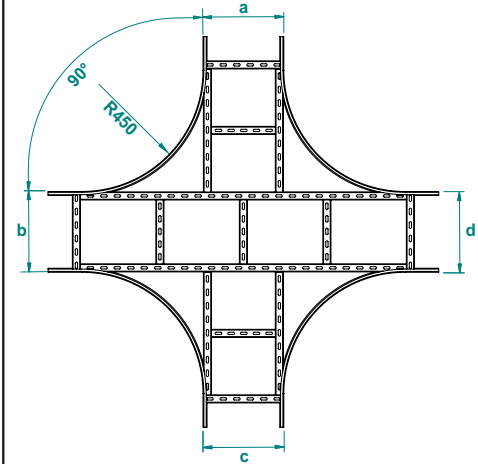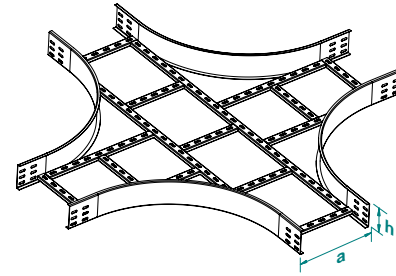

### MDR4 H75 HDG

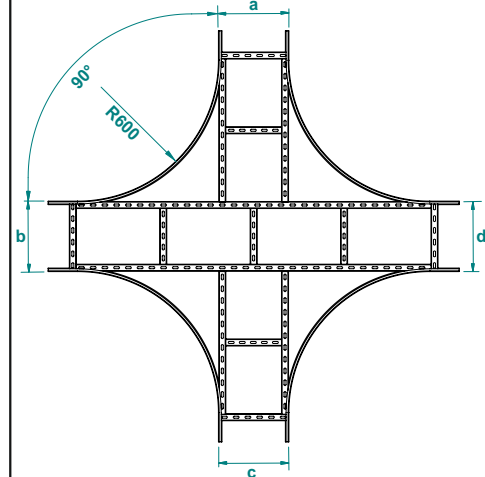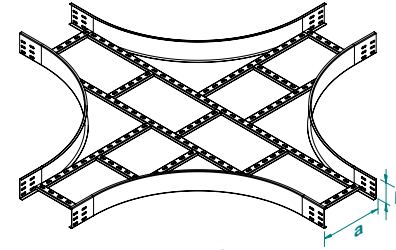

#### APPLICATIONS

Cable routing

#### MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method

to TS-EN 10346:2011 (PG)

SS- stainless steel AISI 304L and AISI 316L (SS)

EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0

# Cable Ladder Systems of Side Height 75



**MTK**  
MADE IN TURKEY

## Middle Reducer Bend of Cable Ladder

Merdiven Ortadan Redüksiyon - Редукционный переходник кабельроста, симметричный



Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

### Hot-Dip Galvanized


| ROSM... H75         |             |             |        | 1.5mm |     |
|---------------------|-------------|-------------|--------|-------|-----|
| CODE                | Width W1 mm | Width W2 mm | kg 1pc |       | pcs |
| ROSM 7515.10 15 HDG | 150         | 100         | 1.57   | 1     |     |
| ROSM 7520.15 15 HDG | 200         | 150         | 1.65   | 1     |     |
| ROSM 7520.10 15 HDG | 200         | 100         | 1.61   | 1     |     |
| ROSM 7525.20 15 HDG | 250         | 200         | 1.73   | 1     |     |
| ROSM 7525.15 15 HDG | 250         | 150         | 1.69   | 1     |     |
| ROSM 7525.10 15 HDG | 250         | 100         | 1.65   | 1     |     |
| ROSM 7530.25 15 HDG | 300         | 250         | 1.81   | 1     |     |
| ROSM 7530.20 15 HDG | 300         | 200         | 1.77   | 1     |     |
| ROSM 7530.15 15 HDG | 300         | 150         | 1.73   | 1     |     |
| ROSM 7530.10 15 HDG | 300         | 100         | 1.69   | 1     |     |
| ROSM 7540.30 15 HDG | 400         | 300         | 1.94   | 1     |     |
| ROSM 7540.25 15 HDG | 400         | 250         | 1.89   | 1     |     |
| ROSM 7540.20 15 HDG | 400         | 200         | 1.85   | 1     |     |
| ROSM 7540.15 15 HDG | 400         | 150         | 1.81   | 1     |     |
| ROSM 7540.10 15 HDG | 400         | 100         | 1.77   | 1     |     |
| ROSM 7545.40 15 HDG | 450         | 400         | 2.06   | 1     |     |
| ROSM 7545.30 15 HDG | 450         | 300         | 1.98   | 1     |     |
| ROSM 7545.25 15 HDG | 450         | 250         | 1.94   | 1     |     |
| ROSM 7545.20 15 HDG | 450         | 200         | 1.89   | 1     |     |
| ROSM 7545.15 15 HDG | 450         | 150         | 1.85   | 1     |     |
| ROSM 7545.10 15 HDG | 450         | 100         | 1.81   | 1     |     |
| ROSM 7550.45 15 HDG | 500         | 450         | 2.14   | 1     |     |
| ROSM 7550.40 15 HDG | 500         | 400         | 2.10   | 1     |     |
| ROSM 7550.30 15 HDG | 500         | 300         | 2.02   | 1     |     |
| ROSM 7550.25 15 HDG | 500         | 250         | 1.98   | 1     |     |
| ROSM 7550.20 15 HDG | 500         | 200         | 1.94   | 1     |     |
| ROSM 7550.15 15 HDG | 500         | 150         | 1.89   | 1     |     |
| ROSM 7550.10 15 HDG | 500         | 100         | 1.85   | 1     |     |
| ROSM 7560.50 15 HDG | 600         | 500         | 2.27   | 1     |     |
| ROSM 7560.45 15 HDG | 600         | 450         | 2.22   | 1     |     |
| ROSM 7560.40 15 HDG | 600         | 400         | 2.18   | 1     |     |
| ROSM 7560.30 15 HDG | 600         | 300         | 2.10   | 1     |     |
| ROSM 7560.25 15 HDG | 600         | 250         | 2.06   | 1     |     |
| ROSM 7560.20 15 HDG | 600         | 200         | 2.02   | 1     |     |
| ROSM 7560.15 15 HDG | 600         | 150         | 1.98   | 1     |     |
| ROSM 7560.10 15 HDG | 600         | 100         | 1.94   | 1     |     |
| ROSM 7575.60 15 HDG | 750         | 600         | 2.47   | 1     |     |
| ROSM 7575.50 15 HDG | 750         | 500         | 2.39   | 1     |     |
| ROSM 7575.45 15 HDG | 750         | 450         | 2.35   | 1     |     |
| ROSM 7575.40 15 HDG | 750         | 400         | 2.31   | 1     |     |
| ROSM 7575.30 15 HDG | 750         | 300         | 2.22   | 1     |     |
| ROSM 7575.20 15 HDG | 750         | 200         | 2.14   | 1     |     |
| ROSM 7575.15 15 HDG | 750         | 150         | 2.10   | 1     |     |
| ROSM 7590.75 15 HDG | 900         | 750         | 2.72   | 1     |     |
| ROSM 7590.60 15 HDG | 900         | 600         | 2.60   | 1     |     |
| ROSM 7590.45 15 HDG | 900         | 450         | 2.47   | 1     |     |
| ROSM 7590.30 15 HDG | 900         | 300         | 2.35   | 1     |     |
| ROSM 7590.15 15 HDG | 900         | 150         | 3.33   | 1     |     |
| ROSM 7502.90 15 HDG | 1200        | 900         | 3.09   | 1     |     |
| ROSM 7502.75 15 HDG | 1200        | 750         | 2.97   | 1     |     |
| ROSM 7502.60 15 HDG | 1200        | 600         | 2.84   | 1     |     |
| ROSM 7502.30 15 HDG | 1200        | 300         | 4.92   | 1     |     |
| ROSM 7502.15 15 HDG | 1200        | 150         | 5.07   | 1     |     |

| ROSM... H75         |             |             |        | 2.0mm |     |
|---------------------|-------------|-------------|--------|-------|-----|
| CODE                | Width W1 mm | Width W2 mm | kg 1pc |       | pcs |
| ROSM 7515.10 20 HDG | 150         | 100         | 2.09   | 1     |     |
| ROSM 7520.15 20 HDG | 200         | 150         | 2.20   | 1     |     |
| ROSM 7520.10 20 HDG | 200         | 100         | 2.14   | 1     |     |
| ROSM 7525.20 20 HDG | 250         | 200         | 2.31   | 1     |     |
| ROSM 7525.15 20 HDG | 250         | 150         | 2.25   | 1     |     |
| ROSM 7525.10 20 HDG | 250         | 100         | 2.20   | 1     |     |
| ROSM 7530.25 20 HDG | 300         | 250         | 2.41   | 1     |     |
| ROSM 7530.20 20 HDG | 300         | 200         | 2.36   | 1     |     |
| ROSM 7530.15 20 HDG | 300         | 150         | 2.31   | 1     |     |
| ROSM 7530.10 20 HDG | 300         | 100         | 2.25   | 1     |     |
| ROSM 7540.30 20 HDG | 400         | 300         | 2.58   | 1     |     |
| ROSM 7540.25 20 HDG | 400         | 250         | 2.52   | 1     |     |
| ROSM 7540.20 20 HDG | 400         | 200         | 2.47   | 1     |     |
| ROSM 7540.15 20 HDG | 400         | 150         | 2.41   | 1     |     |
| ROSM 7540.10 20 HDG | 400         | 100         | 2.36   | 1     |     |
| ROSM 7545.40 20 HDG | 450         | 400         | 2.74   | 1     |     |
| ROSM 7545.30 20 HDG | 450         | 300         | 2.63   | 1     |     |
| ROSM 7545.25 20 HDG | 450         | 250         | 2.58   | 1     |     |
| ROSM 7545.20 20 HDG | 450         | 200         | 2.52   | 1     |     |
| ROSM 7545.15 20 HDG | 450         | 150         | 2.47   | 1     |     |
| ROSM 7545.10 20 HDG | 450         | 100         | 2.41   | 1     |     |
| ROSM 7550.45 20 HDG | 500         | 450         | 2.85   | 1     |     |
| ROSM 7550.40 20 HDG | 500         | 400         | 2.80   | 1     |     |
| ROSM 7550.30 20 HDG | 500         | 300         | 2.69   | 1     |     |
| ROSM 7550.25 20 HDG | 500         | 250         | 2.63   | 1     |     |
| ROSM 7550.20 20 HDG | 500         | 200         | 2.58   | 1     |     |
| ROSM 7550.15 20 HDG | 500         | 150         | 2.52   | 1     |     |
| ROSM 7550.10 20 HDG | 500         | 100         | 2.47   | 1     |     |
| ROSM 7560.50 20 HDG | 600         | 500         | 3.02   | 1     |     |
| ROSM 7560.45 20 HDG | 600         | 450         | 2.96   | 1     |     |
| ROSM 7560.40 20 HDG | 600         | 400         | 2.91   | 1     |     |
| ROSM 7560.30 20 HDG | 600         | 300         | 2.80   | 1     |     |
| ROSM 7560.25 20 HDG | 600         | 250         | 2.74   | 1     |     |
| ROSM 7560.20 20 HDG | 600         | 200         | 2.69   | 1     |     |
| ROSM 7560.15 20 HDG | 600         | 150         | 2.63   | 1     |     |
| ROSM 7560.10 20 HDG | 600         | 100         | 2.58   | 1     |     |
| ROSM 7575.60 20 HDG | 750         | 600         | 3.29   | 1     |     |
| ROSM 7575.50 20 HDG | 750         | 500         | 3.18   | 1     |     |
| ROSM 7575.45 20 HDG | 750         | 450         | 3.13   | 1     |     |
| ROSM 7575.40 20 HDG | 750         | 400         | 3.07   | 1     |     |
| ROSM 7575.30 20 HDG | 750         | 300         | 2.96   | 1     |     |
| ROSM 7575.20 20 HDG | 750         | 200         | 2.85   | 1     |     |
| ROSM 7575.15 20 HDG | 750         | 150         | 2.80   | 1     |     |
| ROSM 7590.75 20 HDG | 900         | 750         | 3.62   | 1     |     |
| ROSM 7590.60 20 HDG | 900         | 600         | 3.46   | 1     |     |
| ROSM 7590.45 20 HDG | 900         | 450         | 3.29   | 1     |     |
| ROSM 7590.30 20 HDG | 900         | 300         | 3.13   | 1     |     |
| ROSM 7590.15 20 HDG | 900         | 150         | 4.44   | 1     |     |
| ROSM 7502.90 20 HDG | 1200        | 900         | 4.12   | 1     |     |
| ROSM 7502.75 20 HDG | 1200        | 750         | 3.95   | 1     |     |
| ROSM 7502.60 20 HDG | 1200        | 600         | 3.79   | 1     |     |
| ROSM 7502.30 20 HDG | 1200        | 300         | 6.55   | 1     |     |
| ROSM 7502.15 20 HDG | 1200        | 150         | 6.76   | 1     |     |

### ROSM H75 HDG

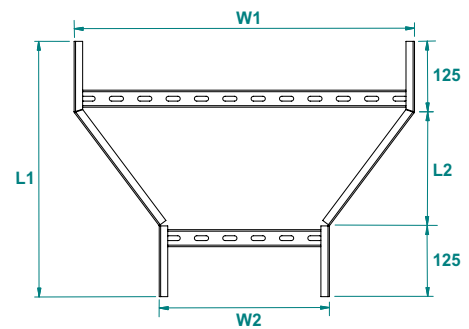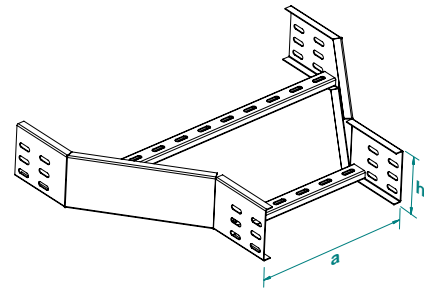

|          | L1     | L2     |
|----------|--------|--------|
| 100-600  | 450 mm | 200 mm |
| 700-1200 | 650 mm | 400 mm |

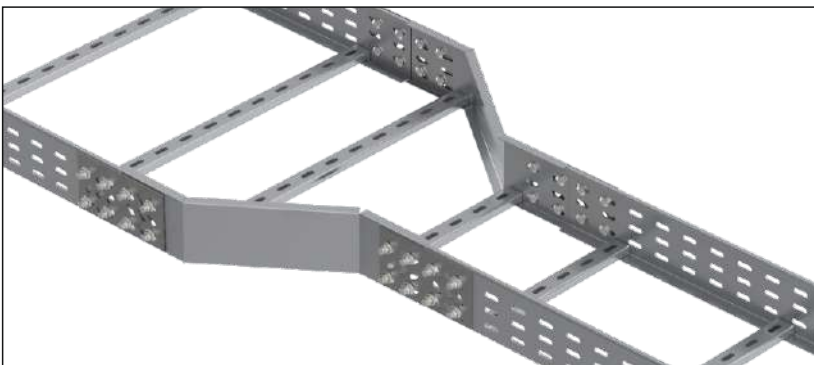

### APPLICATIONS

Cable routing

### MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method to TS-EN 10346:2011 (PG)  
SS- stainless steel AISI 304L and AISI 316L (SS)  
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: **1.5 2.0**

# Cable Ladder Systems of Side Height 75



**MTK**  
MADE IN TURKEY

## Left Reducer Bend of Cable Ladder

Merdiven Soldan Redüksiyon - Редукционный переходник кабельроста, левосторонний




Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8



### Hot-Dip Galvanized

| RLSM... H75         |             |             |        | 1.5mm |     |
|---------------------|-------------|-------------|--------|-------|-----|
| CODE                | Width W1 mm | Width W1 mm | kg 1pc |       | pcs |
| RLSM 7515.10 15 HDG | 150         | 100         | 1.57   | 1     |     |
| RLSM 7520.15 15 HDG | 200         | 150         | 1.65   | 1     |     |
| RLSM 7520.10 15 HDG | 200         | 100         | 1.61   | 1     |     |
| RLSM 7525.20 15 HDG | 250         | 200         | 1.73   | 1     |     |
| RLSM 7525.15 15 HDG | 250         | 150         | 1.69   | 1     |     |
| RLSM 7525.10 15 HDG | 250         | 100         | 1.65   | 1     |     |
| RLSM 7530.25 15 HDG | 300         | 250         | 1.81   | 1     |     |
| RLSM 7530.20 15 HDG | 300         | 200         | 1.77   | 1     |     |
| RLSM 7530.15 15 HDG | 300         | 150         | 1.73   | 1     |     |
| RLSM 7530.10 15 HDG | 300         | 100         | 1.69   | 1     |     |
| RLSM 7540.30 15 HDG | 400         | 300         | 1.94   | 1     |     |
| RLSM 7540.25 15 HDG | 400         | 250         | 1.89   | 1     |     |
| RLSM 7540.20 15 HDG | 400         | 200         | 1.85   | 1     |     |
| RLSM 7540.15 15 HDG | 400         | 150         | 1.81   | 1     |     |
| RLSM 7540.10 15 HDG | 400         | 100         | 1.77   | 1     |     |
| RLSM 7545.40 15 HDG | 450         | 400         | 2.06   | 1     |     |
| RLSM 7545.30 15 HDG | 450         | 300         | 1.98   | 1     |     |
| RLSM 7545.25 15 HDG | 450         | 250         | 1.94   | 1     |     |
| RLSM 7545.20 15 HDG | 450         | 200         | 1.89   | 1     |     |
| RLSM 7545.15 15 HDG | 450         | 150         | 1.85   | 1     |     |
| RLSM 7545.10 15 HDG | 450         | 100         | 1.81   | 1     |     |
| RLSM 7550.45 15 HDG | 500         | 450         | 2.14   | 1     |     |
| RLSM 7550.40 15 HDG | 500         | 400         | 2.10   | 1     |     |
| RLSM 7550.30 15 HDG | 500         | 300         | 2.02   | 1     |     |
| RLSM 7550.25 15 HDG | 500         | 250         | 1.98   | 1     |     |
| RLSM 7550.20 15 HDG | 500         | 200         | 1.94   | 1     |     |
| RLSM 7550.15 15 HDG | 500         | 150         | 1.89   | 1     |     |
| RLSM 7550.10 15 HDG | 500         | 100         | 1.85   | 1     |     |
| RLSM 7560.50 15 HDG | 600         | 500         | 2.27   | 1     |     |
| RLSM 7560.45 15 HDG | 600         | 450         | 2.22   | 1     |     |
| RLSM 7560.40 15 HDG | 600         | 400         | 2.18   | 1     |     |
| RLSM 7560.30 15 HDG | 600         | 300         | 2.10   | 1     |     |
| RLSM 7560.25 15 HDG | 600         | 250         | 2.06   | 1     |     |
| RLSM 7560.20 15 HDG | 600         | 200         | 2.02   | 1     |     |
| RLSM 7560.15 15 HDG | 600         | 150         | 1.98   | 1     |     |
| RLSM 7560.10 15 HDG | 600         | 100         | 1.94   | 1     |     |
| RLSM 7575.60 15 HDG | 750         | 600         | 2.47   | 1     |     |
| RLSM 7575.50 15 HDG | 750         | 500         | 2.39   | 1     |     |
| RLSM 7575.45 15 HDG | 750         | 450         | 2.35   | 1     |     |
| RLSM 7575.40 15 HDG | 750         | 400         | 2.31   | 1     |     |
| RLSM 7575.30 15 HDG | 750         | 300         | 2.22   | 1     |     |
| RLSM 7575.20 15 HDG | 750         | 200         | 2.14   | 1     |     |
| RLSM 7575.15 15 HDG | 750         | 150         | 2.10   | 1     |     |
| RLSM 7590.75 15 HDG | 900         | 750         | 2.72   | 1     |     |
| RLSM 7590.60 15 HDG | 900         | 600         | 2.60   | 1     |     |
| RLSM 7590.45 15 HDG | 900         | 450         | 2.47   | 1     |     |
| RLSM 7590.30 15 HDG | 900         | 300         | 2.35   | 1     |     |
| RLSM 7590.15 15 HDG | 900         | 150         | 3.33   | 1     |     |
| RLSM 7502.90 15 HDG | 1200        | 900         | 3.09   | 1     |     |
| RLSM 7502.75 15 HDG | 1200        | 750         | 2.97   | 1     |     |
| RLSM 7502.60 15 HDG | 1200        | 600         | 2.84   | 1     |     |
| RLSM 7502.30 15 HDG | 1200        | 300         | 4.92   | 1     |     |
| RLSM 7502.15 15 HDG | 1200        | 150         | 5.07   | 1     |     |

| RLSM... H75         |             |             |        | 2.0mm |     |
|---------------------|-------------|-------------|--------|-------|-----|
| CODE                | Width W1 mm | Width W1 mm | kg 1pc |       | pcs |
| RLSM 7515.10 20 HDG | 150         | 100         | 2.09   | 1     |     |
| RLSM 7520.15 20 HDG | 200         | 150         | 2.20   | 1     |     |
| RLSM 7520.10 20 HDG | 200         | 100         | 2.14   | 1     |     |
| RLSM 7525.20 20 HDG | 250         | 200         | 2.31   | 1     |     |
| RLSM 7525.15 20 HDG | 250         | 150         | 2.25   | 1     |     |
| RLSM 7525.10 20 HDG | 250         | 100         | 2.20   | 1     |     |
| RLSM 7530.25 20 HDG | 300         | 250         | 2.41   | 1     |     |
| RLSM 7530.20 20 HDG | 300         | 200         | 2.36   | 1     |     |
| RLSM 7530.15 20 HDG | 300         | 150         | 2.31   | 1     |     |
| RLSM 7530.10 20 HDG | 300         | 100         | 2.25   | 1     |     |
| RLSM 7540.30 20 HDG | 400         | 300         | 2.58   | 1     |     |
| RLSM 7540.25 20 HDG | 400         | 250         | 2.52   | 1     |     |
| RLSM 7540.20 20 HDG | 400         | 200         | 2.47   | 1     |     |
| RLSM 7540.15 20 HDG | 400         | 150         | 2.41   | 1     |     |
| RLSM 7540.10 20 HDG | 400         | 100         | 2.36   | 1     |     |
| RLSM 7545.40 20 HDG | 450         | 400         | 2.74   | 1     |     |
| RLSM 7545.30 20 HDG | 450         | 300         | 2.63   | 1     |     |
| RLSM 7545.25 20 HDG | 450         | 250         | 2.58   | 1     |     |
| RLSM 7545.20 20 HDG | 450         | 200         | 2.52   | 1     |     |
| RLSM 7545.15 20 HDG | 450         | 150         | 2.47   | 1     |     |
| RLSM 7545.10 20 HDG | 450         | 100         | 2.41   | 1     |     |
| RLSM 7550.45 20 HDG | 500         | 450         | 2.85   | 1     |     |
| RLSM 7550.40 20 HDG | 500         | 400         | 2.80   | 1     |     |
| RLSM 7550.30 20 HDG | 500         | 300         | 2.69   | 1     |     |
| RLSM 7550.25 20 HDG | 500         | 250         | 2.63   | 1     |     |
| RLSM 7550.20 20 HDG | 500         | 200         | 2.58   | 1     |     |
| RLSM 7550.15 20 HDG | 500         | 150         | 2.52   | 1     |     |
| RLSM 7550.10 20 HDG | 500         | 100         | 2.47   | 1     |     |
| RLSM 7560.50 20 HDG | 600         | 500         | 3.02   | 1     |     |
| RLSM 7560.45 20 HDG | 600         | 450         | 2.96   | 1     |     |
| RLSM 7560.40 20 HDG | 600         | 400         | 2.91   | 1     |     |
| RLSM 7560.30 20 HDG | 600         | 300         | 2.80   | 1     |     |
| RLSM 7560.25 20 HDG | 600         | 250         | 2.74   | 1     |     |
| RLSM 7560.20 20 HDG | 600         | 200         | 2.69   | 1     |     |
| RLSM 7560.15 20 HDG | 600         | 150         | 2.63   | 1     |     |
| RLSM 7560.10 20 HDG | 600         | 100         | 2.58   | 1     |     |
| RLSM 7575.60 20 HDG | 750         | 600         | 3.29   | 1     |     |
| RLSM 7575.50 20 HDG | 750         | 500         | 3.18   | 1     |     |
| RLSM 7575.45 20 HDG | 750         | 450         | 3.13   | 1     |     |
| RLSM 7575.40 20 HDG | 750         | 400         | 3.07   | 1     |     |
| RLSM 7575.30 20 HDG | 750         | 300         | 2.96   | 1     |     |
| RLSM 7575.20 20 HDG | 750         | 200         | 2.85   | 1     |     |
| RLSM 7575.15 20 HDG | 750         | 150         | 2.80   | 1     |     |
| RLSM 7590.75 20 HDG | 900         | 750         | 3.62   | 1     |     |
| RLSM 7590.60 20 HDG | 900         | 600         | 3.46   | 1     |     |
| RLSM 7590.45 20 HDG | 900         | 450         | 3.29   | 1     |     |
| RLSM 7590.30 20 HDG | 900         | 300         | 3.13   | 1     |     |
| RLSM 7590.15 20 HDG | 900         | 150         | 4.44   | 1     |     |
| RLSM 7502.90 20 HDG | 1200        | 900         | 4.12   | 1     |     |
| RLSM 7502.75 20 HDG | 1200        | 750         | 3.95   | 1     |     |
| RLSM 7502.60 20 HDG | 1200        | 600         | 3.79   | 1     |     |
| RLSM 7502.30 20 HDG | 1200        | 300         | 6.55   | 1     |     |
| RLSM 7502.15 20 HDG | 1200        | 150         | 6.76   | 1     |     |

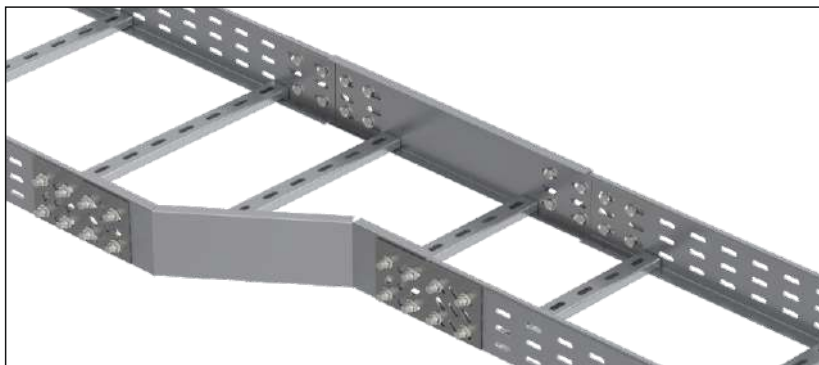

### RLSM H75 HDG

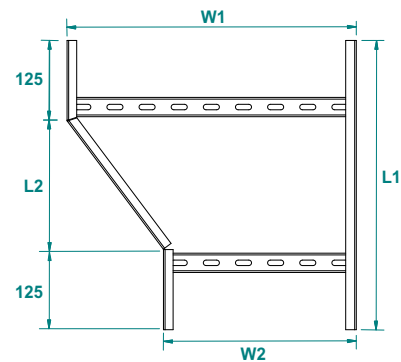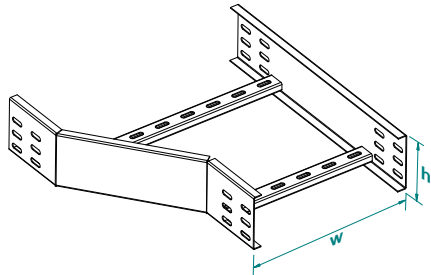

|          | L1     | L2     |
|----------|--------|--------|
| 100-600  | 450 mm | 200 mm |
| 700-1200 | 650 mm | 400 mm |

### APPLICATIONS

Cable routing

### MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method to TS-EN 10346:2011 (PG)  
SS- stainless steel AISI 304L and AISI 316L (SS)  
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: **1.5 2.0**




# Cable Ladder Systems of Side Height 75



**MTK**  
MADE IN TURKEY

## Right Reducer Bend of Cable Ladder

Merdiven Sağdan Redüksiyon - Редукционный переходник кабельроста, правосторонний

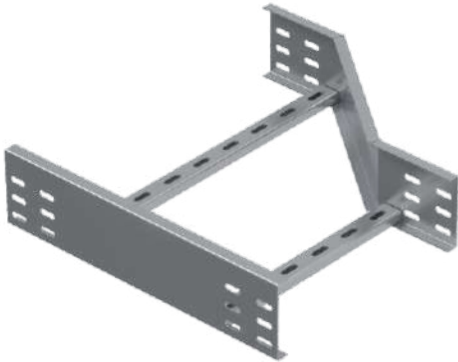

Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

### Hot-Dip Galvanized

| RGSM... H75         |             | 1.5mm       |        |
|---------------------|-------------|-------------|--------|
| CODE                | Width W1 mm | Width W1 mm | kg 1pc |
| RGSM 7515.10 15 HDG | 150         | 100         | 1.57   |
| RGSM 7520.15 15 HDG | 200         | 150         | 1.65   |
| RGSM 7520.10 15 HDG | 200         | 100         | 1.61   |
| RGSM 7525.20 15 HDG | 250         | 200         | 1.73   |
| RGSM 7525.15 15 HDG | 250         | 150         | 1.69   |
| RGSM 7525.10 15 HDG | 250         | 100         | 1.65   |
| RGSM 7530.25 15 HDG | 300         | 250         | 1.81   |
| RGSM 7530.20 15 HDG | 300         | 200         | 1.77   |
| RGSM 7530.15 15 HDG | 300         | 150         | 1.73   |
| RGSM 7530.10 15 HDG | 300         | 100         | 1.69   |
| RGSM 7540.30 15 HDG | 400         | 300         | 1.94   |
| RGSM 7540.25 15 HDG | 400         | 250         | 1.89   |
| RGSM 7540.20 15 HDG | 400         | 200         | 1.85   |
| RGSM 7540.15 15 HDG | 400         | 150         | 1.81   |
| RGSM 7540.10 15 HDG | 400         | 100         | 1.77   |
| RGSM 7545.40 15 HDG | 450         | 400         | 2.06   |
| RGSM 7545.30 15 HDG | 450         | 300         | 1.98   |
| RGSM 7545.25 15 HDG | 450         | 250         | 1.94   |
| RGSM 7545.20 15 HDG | 450         | 200         | 1.89   |
| RGSM 7545.15 15 HDG | 450         | 150         | 1.85   |
| RGSM 7545.10 15 HDG | 450         | 100         | 1.81   |
| RGSM 7550.45 15 HDG | 500         | 450         | 2.14   |
| RGSM 7550.40 15 HDG | 500         | 400         | 2.10   |
| RGSM 7550.30 15 HDG | 500         | 300         | 2.02   |
| RGSM 7550.25 15 HDG | 500         | 250         | 1.98   |
| RGSM 7550.20 15 HDG | 500         | 200         | 1.94   |
| RGSM 7550.15 15 HDG | 500         | 150         | 1.89   |
| RGSM 7550.10 15 HDG | 500         | 100         | 1.85   |
| RGSM 7560.50 15 HDG | 600         | 500         | 2.27   |
| RGSM 7560.45 15 HDG | 600         | 450         | 2.22   |
| RGSM 7560.40 15 HDG | 600         | 400         | 2.18   |
| RGSM 7560.30 15 HDG | 600         | 300         | 2.10   |
| RGSM 7560.25 15 HDG | 600         | 250         | 2.06   |
| RGSM 7560.20 15 HDG | 600         | 200         | 2.02   |
| RGSM 7560.15 15 HDG | 600         | 150         | 1.98   |
| RGSM 7560.10 15 HDG | 600         | 100         | 1.94   |
| RGSM 7575.60 15 HDG | 750         | 600         | 2.47   |
| RGSM 7575.50 15 HDG | 750         | 500         | 2.39   |
| RGSM 7575.45 15 HDG | 750         | 450         | 2.35   |
| RGSM 7575.40 15 HDG | 750         | 400         | 2.31   |
| RGSM 7575.30 15 HDG | 750         | 300         | 2.22   |
| RGSM 7575.20 15 HDG | 750         | 200         | 2.14   |
| RGSM 7575.15 15 HDG | 750         | 150         | 2.10   |
| RGSM 7590.75 15 HDG | 900         | 750         | 2.72   |
| RGSM 7590.60 15 HDG | 900         | 600         | 2.60   |
| RGSM 7590.45 15 HDG | 900         | 450         | 2.47   |
| RGSM 7590.30 15 HDG | 900         | 300         | 2.35   |
| RGSM 7590.15 15 HDG | 900         | 150         | 3.33   |
| RGSM 7502.90 15 HDG | 1200        | 900         | 3.09   |
| RGSM 7502.75 15 HDG | 1200        | 750         | 2.97   |
| RGSM 7502.60 15 HDG | 1200        | 600         | 2.84   |
| RGSM 7502.30 15 HDG | 1200        | 300         | 4.92   |
| RGSM 7502.15 15 HDG | 1200        | 150         | 5.07   |

| RGSM... H75         |             | 2.0mm       |        |
|---------------------|-------------|-------------|--------|
| CODE                | Width W1 mm | Width W1 mm | kg 1pc |
| RGSM 7515.10 20 HDG | 150         | 100         | 2.09   |
| RGSM 7520.15 20 HDG | 200         | 150         | 2.20   |
| RGSM 7520.10 20 HDG | 200         | 100         | 2.14   |
| RGSM 7525.20 20 HDG | 250         | 200         | 2.31   |
| RGSM 7525.15 20 HDG | 250         | 150         | 2.25   |
| RGSM 7525.10 20 HDG | 250         | 100         | 2.20   |
| RGSM 7530.25 20 HDG | 300         | 250         | 2.41   |
| RGSM 7530.20 20 HDG | 300         | 200         | 2.36   |
| RGSM 7530.15 20 HDG | 300         | 150         | 2.31   |
| RGSM 7530.10 20 HDG | 300         | 100         | 2.25   |
| RGSM 7540.30 20 HDG | 400         | 300         | 2.58   |
| RGSM 7540.25 20 HDG | 400         | 250         | 2.52   |
| RGSM 7540.20 20 HDG | 400         | 200         | 2.47   |
| RGSM 7540.15 20 HDG | 400         | 150         | 2.41   |
| RGSM 7540.10 20 HDG | 400         | 100         | 2.36   |
| RGSM 7545.40 20 HDG | 450         | 400         | 2.74   |
| RGSM 7545.30 20 HDG | 450         | 300         | 2.63   |
| RGSM 7545.25 20 HDG | 450         | 250         | 2.58   |
| RGSM 7545.20 20 HDG | 450         | 200         | 2.52   |
| RGSM 7545.15 20 HDG | 450         | 150         | 2.47   |
| RGSM 7545.10 20 HDG | 450         | 100         | 2.41   |
| RGSM 7550.45 20 HDG | 500         | 450         | 2.85   |
| RGSM 7550.40 20 HDG | 500         | 400         | 2.80   |
| RGSM 7550.30 20 HDG | 500         | 300         | 2.69   |
| RGSM 7550.25 20 HDG | 500         | 250         | 2.63   |
| RGSM 7550.20 20 HDG | 500         | 200         | 2.58   |
| RGSM 7550.15 20 HDG | 500         | 150         | 2.52   |
| RGSM 7550.10 20 HDG | 500         | 100         | 2.47   |
| RGSM 7560.50 20 HDG | 600         | 500         | 3.02   |
| RGSM 7560.45 20 HDG | 600         | 450         | 2.96   |
| RGSM 7560.40 20 HDG | 600         | 400         | 2.91   |
| RGSM 7560.30 20 HDG | 600         | 300         | 2.80   |
| RGSM 7560.25 20 HDG | 600         | 250         | 2.74   |
| RGSM 7560.20 20 HDG | 600         | 200         | 2.69   |
| RGSM 7560.15 20 HDG | 600         | 150         | 2.63   |
| RGSM 7560.10 20 HDG | 600         | 100         | 2.58   |
| RGSM 7575.60 20 HDG | 750         | 600         | 3.29   |
| RGSM 7575.50 20 HDG | 750         | 500         | 3.18   |
| RGSM 7575.45 20 HDG | 750         | 450         | 3.13   |
| RGSM 7575.40 20 HDG | 750         | 400         | 3.07   |
| RGSM 7575.30 20 HDG | 750         | 300         | 2.96   |
| RGSM 7575.20 20 HDG | 750         | 200         | 2.85   |
| RGSM 7575.15 20 HDG | 750         | 150         | 2.80   |
| RGSM 7590.75 20 HDG | 900         | 750         | 3.62   |
| RGSM 7590.60 20 HDG | 900         | 600         | 3.46   |
| RGSM 7590.45 20 HDG | 900         | 450         | 3.29   |
| RGSM 7590.30 20 HDG | 900         | 300         | 3.13   |
| RGSM 7590.15 20 HDG | 900         | 150         | 4.44   |
| RGSM 7502.90 20 HDG | 1200        | 900         | 4.12   |
| RGSM 7502.75 20 HDG | 1200        | 750         | 3.95   |
| RGSM 7502.60 20 HDG | 1200        | 600         | 3.79   |
| RGSM 7502.30 20 HDG | 1200        | 300         | 6.55   |
| RGSM 7502.15 20 HDG | 1200        | 150         | 6.76   |

### RGSM H75 HDG

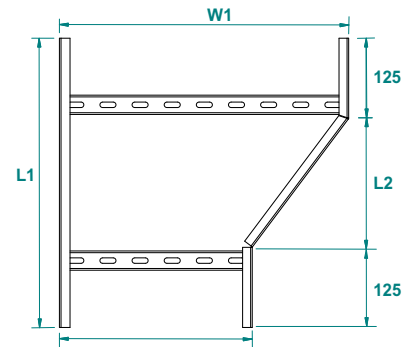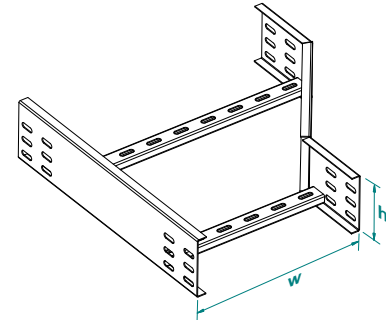

|          | L1     | L2     |
|----------|--------|--------|
| 100-600  | 450 mm | 200 mm |
| 700-1200 | 650 mm | 400 mm |



### APPLICATIONS

Cable routing

### MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method  
to TS-EN 10346:2011 (PG)  
SS- stainless steel AISI 304L and AISI 316L (SS)  
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: **1.5 2.0**



# Cable Ladder Systems of Side Height 75



**MTK**  
MADE IN TURKEY

## Vertical 90° Inside Bend of Cable Ladder (stable)

90° Dikey Merdiven İç Bükey Elemanı-(Sabit) - Арка фиксированная кабельроста, внутренняя 90°



Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

### Hot-Dip Galvanized

| MIS... H75      |                    | 1.5mm             |           |     |  |
|-----------------|--------------------|-------------------|-----------|-----|--|
| CODE            | Width<br>a=b<br>mm | Radius<br>R<br>mm | Kg<br>1pc | pcs |  |
| MIS 7510 15 HDG | 100                | 150               | 1.74      | 1   |  |
| MIS 7515 15 HDG | 150                | 150               | 1.87      | 1   |  |
| MIS 7520 15 HDG | 200                | 150               | 1.99      | 1   |  |
| MIS 7525 15 HDG | 250                | 150               | 2.11      | 1   |  |
| MIS 7530 15 HDG | 300                | 150               | 2.24      | 1   |  |
| MIS 7540 15 HDG | 400                | 150               | 2.48      | 1   |  |
| MIS 7545 15 HDG | 450                | 150               | 2.61      | 1   |  |
| MIS 7550 15 HDG | 500                | 150               | 2.73      | 1   |  |
| MIS 7560 15 HDG | 600                | 150               | 2.98      | 1   |  |
| MIS 7570 15 HDG | 700                | 150               | 3.23      | 1   |  |
| MIS 7575 15 HDG | 750                | 150               | 3.35      | 1   |  |
| MIS 7580 15 HDG | 800                | 150               | 3.47      | 1   |  |
| MIS 7590 15 HDG | 900                | 150               | 3.72      | 1   |  |
| MIS 7500 15 HDG | 1000               | 150               | 3.97      | 1   |  |
| MIS 7502 15 HDG | 1200               | 150               | 4.46      | 1   |  |

| MIS... H75      |                    | 2.0mm             |           |     |  |
|-----------------|--------------------|-------------------|-----------|-----|--|
| CODE            | Width<br>a=b<br>mm | Radius<br>R<br>mm | Kg<br>1pc | pcs |  |
| MIS 7510 20 HDG | 100                | 150               | 2.32      | 1   |  |
| MIS 7515 20 HDG | 150                | 150               | 2.49      | 1   |  |
| MIS 7520 20 HDG | 200                | 150               | 2.65      | 1   |  |
| MIS 7525 20 HDG | 250                | 150               | 2.82      | 1   |  |
| MIS 7530 20 HDG | 300                | 150               | 2.98      | 1   |  |
| MIS 7540 20 HDG | 400                | 150               | 3.31      | 1   |  |
| MIS 7545 20 HDG | 450                | 150               | 3.47      | 1   |  |
| MIS 7550 20 HDG | 500                | 150               | 3.64      | 1   |  |
| MIS 7560 20 HDG | 600                | 150               | 3.97      | 1   |  |
| MIS 7570 20 HDG | 700                | 150               | 4.30      | 1   |  |
| MIS 7575 20 HDG | 750                | 150               | 4.46      | 1   |  |
| MIS 7580 20 HDG | 800                | 150               | 4.63      | 1   |  |
| MIS 7590 20 HDG | 900                | 150               | 4.96      | 1   |  |
| MIS 7500 20 HDG | 1000               | 150               | 5.29      | 1   |  |
| MIS 7502 20 HDG | 1200               | 150               | 5.95      | 1   |  |

## Vertical 90° Inside Bend of Cable Ladder (stable) Radius:300

90° Dikey Merdiven İç Bükey Elemanı-(Sabit) Radyus:300 - Арка фиксированная кабельроста, внутренняя 90° радиус:300



Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

### Hot-Dip Galvanized



| MISR2... H75      |                    | 1.5mm             |           |     |  |
|-------------------|--------------------|-------------------|-----------|-----|--|
| CODE              | Width<br>a=b<br>mm | Radius<br>R<br>mm | Kg<br>1pc | pcs |  |
| MISR2 7510 15 HDG | 100                | 300               | 3.58      | 1   |  |
| MISR2 7515 15 HDG | 150                | 300               | 3.72      | 1   |  |
| MISR2 7520 15 HDG | 200                | 300               | 3.86      | 1   |  |
| MISR2 7525 15 HDG | 250                | 300               | 3.99      | 1   |  |
| MISR2 7530 15 HDG | 300                | 300               | 4.13      | 1   |  |
| MISR2 7540 15 HDG | 400                | 300               | 4.41      | 1   |  |
| MISR2 7545 15 HDG | 450                | 300               | 4.54      | 1   |  |
| MISR2 7550 15 HDG | 500                | 300               | 4.68      | 1   |  |
| MISR2 7560 15 HDG | 600                | 300               | 4.96      | 1   |  |
| MISR2 7570 15 HDG | 700                | 300               | 5.23      | 1   |  |
| MISR2 7575 15 HDG | 750                | 300               | 5.37      | 1   |  |
| MISR2 7580 15 HDG | 800                | 300               | 5.51      | 1   |  |
| MISR2 7590 15 HDG | 900                | 300               | 5.78      | 1   |  |
| MISR2 7500 15 HDG | 1000               | 300               | 6.06      | 1   |  |
| MISR2 7502 15 HDG | 1200               | 300               | 6.61      | 1   |  |

| MISR2... H75      |                    | 2.0mm             |           |     |  |
|-------------------|--------------------|-------------------|-----------|-----|--|
| CODE              | Width<br>a=b<br>mm | Radius<br>R<br>mm | Kg<br>1pc | pcs |  |
| MISR2 7510 20 HDG | 100                | 300               | 4.77      | 1   |  |
| MISR2 7515 20 HDG | 150                | 300               | 4.96      | 1   |  |
| MISR2 7520 20 HDG | 200                | 300               | 5.14      | 1   |  |
| MISR2 7525 20 HDG | 250                | 300               | 5.32      | 1   |  |
| MISR2 7530 20 HDG | 300                | 300               | 5.51      | 1   |  |
| MISR2 7540 20 HDG | 400                | 300               | 5.87      | 1   |  |
| MISR2 7545 20 HDG | 450                | 300               | 6.06      | 1   |  |
| MISR2 7550 20 HDG | 500                | 300               | 6.24      | 1   |  |
| MISR2 7560 20 HDG | 600                | 300               | 6.61      | 1   |  |
| MISR2 7570 20 HDG | 700                | 300               | 6.98      | 1   |  |
| MISR2 7575 20 HDG | 750                | 300               | 7.16      | 1   |  |
| MISR2 7580 20 HDG | 800                | 300               | 7.34      | 1   |  |
| MISR2 7590 20 HDG | 900                | 300               | 7.71      | 1   |  |
| MISR2 7500 20 HDG | 1000               | 300               | 8.08      | 1   |  |
| MISR2 7502 20 HDG | 1200               | 300               | 8.81      | 1   |  |

### MIS H75 HDG

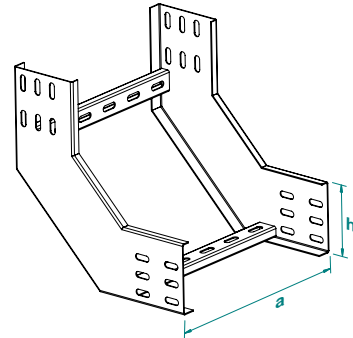

### MISR2 H75 HDG

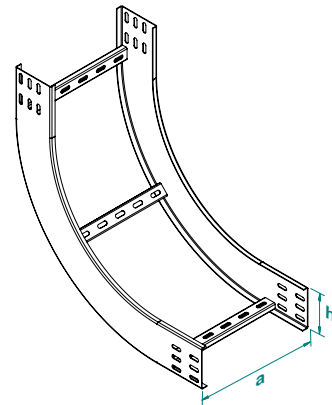

### APPLICATIONS

Cable routing

### MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method  
to TS-EN 10346:2011 (PG)  
SS- stainless steel AISI 304L and AISI 316L (SS)  
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: **1.5 2.0**

# Cable Ladder Systems of Side Height 75



**MTK**  
MADE IN TURKEY

## Vertical 90° Inside Bend of Cable Ladder (stable) Radius:450

90° Dikey Merdiven İç Bükey Elemanı-(Sabit) Radyus:450 - 90° Dikey Merdiven İç Bükey Elemanı-(Sabit) Radyus:450



Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized

| MISR3... H75      |                    | 1.5mm             |           |     |  |
|-------------------|--------------------|-------------------|-----------|-----|--|
| CODE              | Width<br>a=b<br>mm | Radius<br>R<br>mm | Kg<br>1pc | pcs |  |
| MISR3 7510 15 HDG | 100                | 450               | 4.63      | 1   |  |
| MISR3 7515 15 HDG | 150                | 450               | 4.82      | 1   |  |
| MISR3 7520 15 HDG | 200                | 450               | 5.00      | 1   |  |
| MISR3 7525 15 HDG | 250                | 450               | 5.18      | 1   |  |
| MISR3 7530 15 HDG | 300                | 450               | 5.37      | 1   |  |
| MISR3 7540 15 HDG | 400                | 450               | 5.73      | 1   |  |
| MISR3 7545 15 HDG | 450                | 450               | 5.92      | 1   |  |
| MISR3 7550 15 HDG | 500                | 450               | 6.10      | 1   |  |
| MISR3 7560 15 HDG | 600                | 450               | 6.47      | 1   |  |
| MISR3 7570 15 HDG | 700                | 450               | 6.84      | 1   |  |
| MISR3 7575 15 HDG | 750                | 450               | 7.02      | 1   |  |
| MISR3 7580 15 HDG | 800                | 450               | 7.20      | 1   |  |
| MISR3 7590 15 HDG | 900                | 450               | 7.57      | 1   |  |
| MISR3 7500 15 HDG | 1000               | 450               | 7.94      | 1   |  |
| MISR3 7502 15 HDG | 1200               | 450               | 8.67      | 1   |  |

| MISR3... H75      |                    | 2.0mm             |           |     |  |
|-------------------|--------------------|-------------------|-----------|-----|--|
| CODE              | Width<br>a=b<br>mm | Radius<br>R<br>mm | Kg<br>1pc | pcs |  |
| MISR3 7510 20 HDG | 100                | 450               | 6.17      | 1   |  |
| MISR3 7515 20 HDG | 150                | 450               | 6.42      | 1   |  |
| MISR3 7520 20 HDG | 200                | 450               | 6.66      | 1   |  |
| MISR3 7525 20 HDG | 250                | 450               | 6.91      | 1   |  |
| MISR3 7530 20 HDG | 300                | 450               | 7.15      | 1   |  |
| MISR3 7540 20 HDG | 400                | 450               | 7.64      | 1   |  |
| MISR3 7545 20 HDG | 450                | 450               | 7.89      | 1   |  |
| MISR3 7550 20 HDG | 500                | 450               | 8.13      | 1   |  |
| MISR3 7560 20 HDG | 600                | 450               | 8.62      | 1   |  |
| MISR3 7570 20 HDG | 700                | 450               | 9.11      | 1   |  |
| MISR3 7575 20 HDG | 750                | 450               | 9.36      | 1   |  |
| MISR3 7580 20 HDG | 800                | 450               | 9.60      | 1   |  |
| MISR3 7590 20 HDG | 900                | 450               | 10.09     | 1   |  |
| MISR3 7500 20 HDG | 1000               | 450               | 10.58     | 1   |  |
| MISR3 7502 20 HDG | 1200               | 450               | 11.56     | 1   |  |

## Vertical 90° Inside Bend of Cable Ladder (stable) Radius:600

90° Dikey Merdiven İç Bükey Elemanı-(Sabit) Radyus:600 - Арка фиксированная кабельроста, внутренняя 90° радиус:600



Important!


To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized


| MISR4... H75      |                    | 1.5mm             |           |     |  |
|-------------------|--------------------|-------------------|-----------|-----|--|
| CODE              | Width<br>a=b<br>mm | Radius<br>R<br>mm | Kg<br>1pc | pcs |  |
| MISR4 7510 15 HDG | 100                | 600               | 5.80      | 1   |  |
| MISR4 7515 15 HDG | 150                | 600               | 6.03      | 1   |  |
| MISR4 7520 15 HDG | 200                | 600               | 6.26      | 1   |  |
| MISR4 7525 15 HDG | 250                | 600               | 6.49      | 1   |  |
| MISR4 7530 15 HDG | 300                | 600               | 6.72      | 1   |  |
| MISR4 7540 15 HDG | 400                | 600               | 7.18      | 1   |  |
| MISR4 7545 15 HDG | 450                | 600               | 7.41      | 1   |  |
| MISR4 7550 15 HDG | 500                | 600               | 7.64      | 1   |  |
| MISR4 7560 15 HDG | 600                | 600               | 8.10      | 1   |  |
| MISR4 7570 15 HDG | 700                | 600               | 8.56      | 1   |  |
| MISR4 7575 15 HDG | 750                | 600               | 8.79      | 1   |  |
| MISR4 7580 15 HDG | 800                | 600               | 9.02      | 1   |  |
| MISR4 7590 15 HDG | 900                | 600               | 9.48      | 1   |  |
| MISR4 7500 15 HDG | 1000               | 600               | 9.94      | 1   |  |
| MISR4 7502 15 HDG | 1200               | 600               | 10.86     | 1   |  |

| MISR4... H75      |                    | 2.0mm             |           |     |  |
|-------------------|--------------------|-------------------|-----------|-----|--|
| CODE              | Width<br>a=b<br>mm | Radius<br>R<br>mm | Kg<br>1pc | pcs |  |
| MISR4 7510 20 HDG | 100                | 600               | 7.74      | 1   |  |
| MISR4 7515 20 HDG | 150                | 600               | 8.04      | 1   |  |
| MISR4 7520 20 HDG | 200                | 600               | 8.35      | 1   |  |
| MISR4 7525 20 HDG | 250                | 600               | 8.66      | 1   |  |
| MISR4 7530 20 HDG | 300                | 600               | 8.96      | 1   |  |
| MISR4 7540 20 HDG | 400                | 600               | 9.57      | 1   |  |
| MISR4 7545 20 HDG | 450                | 600               | 9.88      | 1   |  |
| MISR4 7550 20 HDG | 500                | 600               | 10.19     | 1   |  |
| MISR4 7560 20 HDG | 600                | 600               | 10.80     | 1   |  |
| MISR4 7570 20 HDG | 700                | 600               | 11.41     | 1   |  |
| MISR4 7575 20 HDG | 750                | 600               | 11.72     | 1   |  |
| MISR4 7580 20 HDG | 800                | 600               | 12.02     | 1   |  |
| MISR4 7590 20 HDG | 900                | 600               | 12.64     | 1   |  |
| MISR4 7500 20 HDG | 1000               | 600               | 13.25     | 1   |  |
| MISR4 7502 20 HDG | 1200               | 600               | 14.47     | 1   |  |

### MISR3 H75 HDG

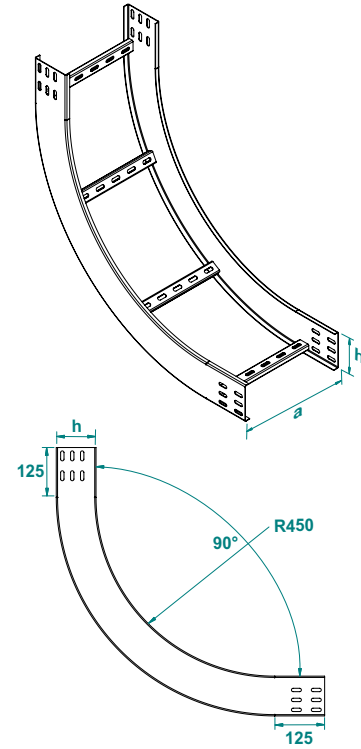

### MISR4 H75 HDG

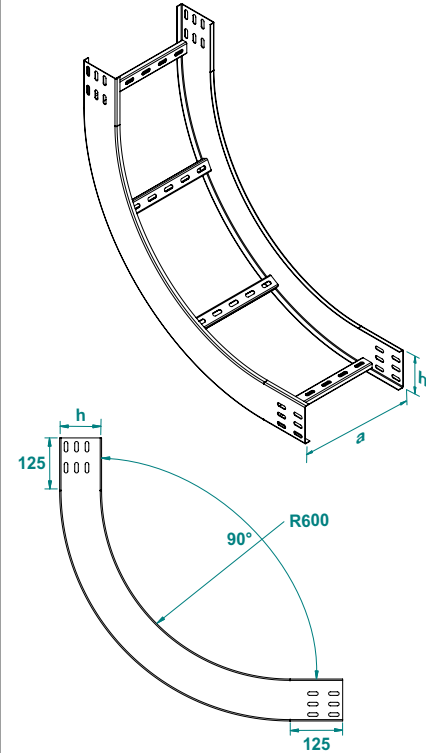

#### APPLICATIONS

Cable routing

#### MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method  
to TS-EN 10346:2011 (PG)  
SS- stainless steel AISI 304L and AISI 316L (SS)  
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: **1.5 2.0**


# Cable Ladder Systems of Side Height 75



**MTK**  
MADE IN TURKEY

## Vertical 60° Inside Bend of Cable Ladder (stable)

60° Dikey Merdiven İç Bükey Elemanı-(Sabit) - Арка фиксированная кабельроста, внутренняя 60°



Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8


### Hot-Dip Galvanized

| MIS60... H75      |                    | 1.5mm             |           |     |  |
|-------------------|--------------------|-------------------|-----------|-----|--|
| CODE              | Width<br>a=b<br>mm | Radius<br>R<br>mm | kg<br>1pc | pcs |  |
| MIS60 7510 15 HDG | 100                | 150               | 1.61      | 1   |  |
| MIS60 7515 15 HDG | 150                | 150               | 1.73      | 1   |  |
| MIS60 7520 15 HDG | 200                | 150               | 1.85      | 1   |  |
| MIS60 7525 15 HDG | 250                | 150               | 1.98      | 1   |  |
| MIS60 7530 15 HDG | 300                | 150               | 2.10      | 1   |  |
| MIS60 7540 15 HDG | 400                | 150               | 2.35      | 1   |  |
| MIS60 7545 15 HDG | 450                | 150               | 2.47      | 1   |  |
| MIS60 7550 15 HDG | 500                | 150               | 2.60      | 1   |  |
| MIS60 7560 15 HDG | 600                | 150               | 2.84      | 1   |  |
| MIS60 7570 15 HDG | 700                | 150               | 3.09      | 1   |  |
| MIS60 7575 15 HDG | 750                | 150               | 3.21      | 1   |  |
| MIS60 7580 15 HDG | 800                | 150               | 3.34      | 1   |  |
| MIS60 7590 15 HDG | 900                | 150               | 3.58      | 1   |  |
| MIS60 7500 15 HDG | 1000               | 150               | 3.83      | 1   |  |
| MIS60 7502 15 HDG | 1200               | 150               | 4.33      | 1   |  |

| MIS60... H75      |                    | 2.0mm             |           |     |  |
|-------------------|--------------------|-------------------|-----------|-----|--|
| CODE              | Width<br>a=b<br>mm | Radius<br>R<br>mm | kg<br>1pc | pcs |  |
| MIS60 7510 20 HDG | 100                | 150               | 2.14      | 1   |  |
| MIS60 7515 20 HDG | 150                | 150               | 2.31      | 1   |  |
| MIS60 7520 20 HDG | 200                | 150               | 2.47      | 1   |  |
| MIS60 7525 20 HDG | 250                | 150               | 2.63      | 1   |  |
| MIS60 7530 20 HDG | 300                | 150               | 2.80      | 1   |  |
| MIS60 7540 20 HDG | 400                | 150               | 3.13      | 1   |  |
| MIS60 7545 20 HDG | 450                | 150               | 3.29      | 1   |  |
| MIS60 7550 20 HDG | 500                | 150               | 3.46      | 1   |  |
| MIS60 7560 20 HDG | 600                | 150               | 3.79      | 1   |  |
| MIS60 7570 20 HDG | 700                | 150               | 4.12      | 1   |  |
| MIS60 7575 20 HDG | 750                | 150               | 4.28      | 1   |  |
| MIS60 7580 20 HDG | 800                | 150               | 4.45      | 1   |  |
| MIS60 7590 20 HDG | 900                | 150               | 4.78      | 1   |  |
| MIS60 7500 20 HDG | 1000               | 150               | 5.11      | 1   |  |
| MIS60 7502 20 HDG | 1200               | 150               | 5.77      | 1   |  |

## Vertical 60° Inside Bend of Cable Ladder (stable) Radius:300

60° Dikey Merdiven İç Bükey Elemanı-(Sabit) Radyus:300 - Арка фиксированная кабельроста, внутренняя 60° радиус:300

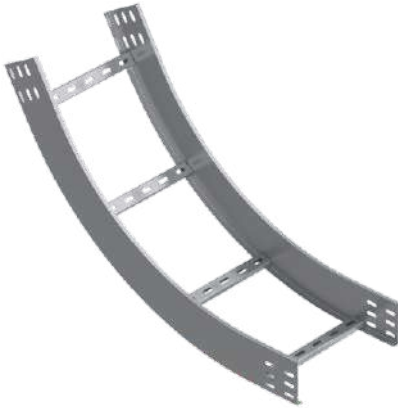

Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

### Hot-Dip Galvanized


| MIS60R2... H75      |                    | 1.5mm             |           |     |  |
|---------------------|--------------------|-------------------|-----------|-----|--|
| CODE                | Width<br>a=b<br>mm | Radius<br>R<br>mm | kg<br>1pc | pcs |  |
| MIS60R2 7510 15 HDG | 100                | 300               | 2.83      | 1   |  |
| MIS60R2 7515 15 HDG | 150                | 300               | 2.97      | 1   |  |
| MIS60R2 7520 15 HDG | 200                | 300               | 3.11      | 1   |  |
| MIS60R2 7525 15 HDG | 250                | 300               | 3.24      | 1   |  |
| MIS60R2 7530 15 HDG | 300                | 300               | 3.38      | 1   |  |
| MIS60R2 7540 15 HDG | 400                | 300               | 3.66      | 1   |  |
| MIS60R2 7545 15 HDG | 450                | 300               | 3.79      | 1   |  |
| MIS60R2 7550 15 HDG | 500                | 300               | 3.93      | 1   |  |
| MIS60R2 7560 15 HDG | 600                | 300               | 4.21      | 1   |  |
| MIS60R2 7570 15 HDG | 700                | 300               | 4.48      | 1   |  |
| MIS60R2 7575 15 HDG | 750                | 300               | 4.62      | 1   |  |
| MIS60R2 7580 15 HDG | 800                | 300               | 4.76      | 1   |  |
| MIS60R2 7590 15 HDG | 900                | 300               | 5.03      | 1   |  |
| MIS60R2 7500 15 HDG | 1000               | 300               | 5.31      | 1   |  |
| MIS60R2 7502 15 HDG | 1200               | 300               | 5.86      | 1   |  |

| MIS60R2... H75      |                    | 2.0mm             |           |     |  |
|---------------------|--------------------|-------------------|-----------|-----|--|
| CODE                | Width<br>a=b<br>mm | Radius<br>R<br>mm | kg<br>1pc | pcs |  |
| MIS60R2 7510 20 HDG | 100                | 300               | 3.77      | 1   |  |
| MIS60R2 7515 20 HDG | 150                | 300               | 3.96      | 1   |  |
| MIS60R2 7520 20 HDG | 200                | 300               | 4.14      | 1   |  |
| MIS60R2 7525 20 HDG | 250                | 300               | 4.32      | 1   |  |
| MIS60R2 7530 20 HDG | 300                | 300               | 4.51      | 1   |  |
| MIS60R2 7540 20 HDG | 400                | 300               | 4.87      | 1   |  |
| MIS60R2 7545 20 HDG | 450                | 300               | 5.06      | 1   |  |
| MIS60R2 7550 20 HDG | 500                | 300               | 5.24      | 1   |  |
| MIS60R2 7560 20 HDG | 600                | 300               | 5.61      | 1   |  |
| MIS60R2 7570 20 HDG | 700                | 300               | 5.98      | 1   |  |
| MIS60R2 7575 20 HDG | 750                | 300               | 6.16      | 1   |  |
| MIS60R2 7580 20 HDG | 800                | 300               | 6.34      | 1   |  |
| MIS60R2 7590 20 HDG | 900                | 300               | 6.71      | 1   |  |
| MIS60R2 7500 20 HDG | 1000               | 300               | 7.08      | 1   |  |
| MIS60R2 7502 20 HDG | 1200               | 300               | 7.81      | 1   |  |

### MIS60 H75 HDG

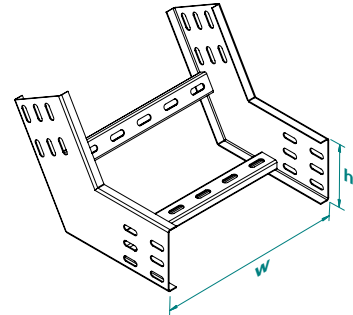

### MIS60R2 H75 HDG

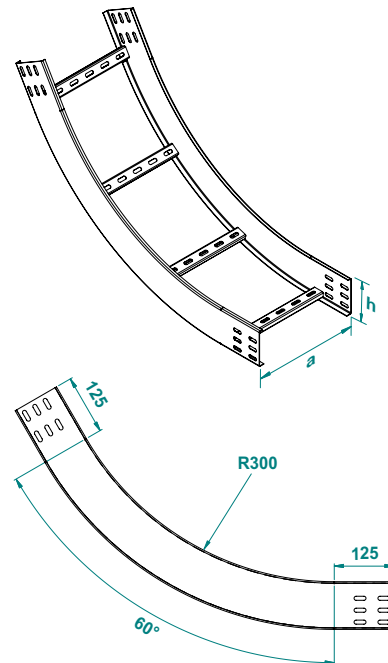

### APPLICATIONS

Cable routing

### MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method  
to TS-EN 10346:2011 (PG)  
SS- stainless steel AISI 304L and AISI 316L (SS)  
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0

# Cable Ladder Systems of Side Height 75



**MTK**  
MADE IN TURKEY

## Vertical 60° Inside Bend of Cable Ladder (stable) Radius:450

60° Dikey Merdiven İç Büküye Elemanı-(Sabit) Radyus:450 - Арка фиксированная кабельроста, внутренняя 60° радиус:450



Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized

| MIS60R3... H75      |                    | 1.5mm             |           |
|---------------------|--------------------|-------------------|-----------|
| CODE                | Width<br>a=b<br>mm | Radius<br>R<br>mm | kg<br>1pc |
| MIS60R3 7510 15 HDG | 100                | 450               | 3.52      |
| MIS60R3 7515 15 HDG | 150                | 450               | 3.66      |
| MIS60R3 7520 15 HDG | 200                | 450               | 3.80      |
| MIS60R3 7525 15 HDG | 250                | 450               | 3.93      |
| MIS60R3 7530 15 HDG | 300                | 450               | 4.07      |
| MIS60R3 7540 15 HDG | 400                | 450               | 4.35      |
| MIS60R3 7545 15 HDG | 450                | 450               | 4.48      |
| MIS60R3 7550 15 HDG | 500                | 450               | 4.62      |
| MIS60R3 7560 15 HDG | 600                | 450               | 4.90      |
| MIS60R3 7570 15 HDG | 700                | 450               | 5.17      |
| MIS60R3 7575 15 HDG | 750                | 450               | 5.31      |
| MIS60R3 7580 15 HDG | 800                | 450               | 5.45      |
| MIS60R3 7590 15 HDG | 900                | 450               | 5.72      |
| MIS60R3 7500 15 HDG | 1000               | 450               | 6.00      |
| MIS60R3 7502 15 HDG | 1200               | 450               | 6.55      |

| MIS60R3... H75      |                    | 2.0mm             |           |
|---------------------|--------------------|-------------------|-----------|
| CODE                | Width<br>a=b<br>mm | Radius<br>R<br>mm | kg<br>1pc |
| MIS60R3 7510 20 HDG | 100                | 450               | 4.69      |
| MIS60R3 7515 20 HDG | 150                | 450               | 4.88      |
| MIS60R3 7520 20 HDG | 200                | 450               | 5.06      |
| MIS60R3 7525 20 HDG | 250                | 450               | 5.24      |
| MIS60R3 7530 20 HDG | 300                | 450               | 5.43      |
| MIS60R3 7540 20 HDG | 400                | 450               | 5.79      |
| MIS60R3 7545 20 HDG | 450                | 450               | 5.98      |
| MIS60R3 7550 20 HDG | 500                | 450               | 6.16      |
| MIS60R3 7560 20 HDG | 600                | 450               | 6.53      |
| MIS60R3 7570 20 HDG | 700                | 450               | 6.90      |
| MIS60R3 7575 20 HDG | 750                | 450               | 7.08      |
| MIS60R3 7580 20 HDG | 800                | 450               | 7.26      |
| MIS60R3 7590 20 HDG | 900                | 450               | 7.63      |
| MIS60R3 7500 20 HDG | 1000               | 450               | 8.00      |
| MIS60R3 7502 20 HDG | 1200               | 450               | 8.73      |

## Vertical 60° Inside Bend of Cable Ladder (stable) Radius:600

60° Dikey Merdiven İç Büküye Elemanı-(Sabit) Radyus:600 - Арка фиксированная кабельроста, внутренняя 60° радиус:600



Important!


To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized


| MIS60R4... H75      |                    | 1.5mm             |           |
|---------------------|--------------------|-------------------|-----------|
| CODE                | Width<br>a=b<br>mm | Radius<br>R<br>mm | kg<br>1pc |
| MIS60R4 7510 15 HDG | 100                | 600               | 3.94      |
| MIS60R4 7515 15 HDG | 150                | 600               | 4.13      |
| MIS60R4 7520 15 HDG | 200                | 600               | 4.31      |
| MIS60R4 7525 15 HDG | 250                | 600               | 4.49      |
| MIS60R4 7530 15 HDG | 300                | 600               | 4.68      |
| MIS60R4 7540 15 HDG | 400                | 600               | 5.04      |
| MIS60R4 7545 15 HDG | 450                | 600               | 5.23      |
| MIS60R4 7550 15 HDG | 500                | 600               | 5.41      |
| MIS60R4 7560 15 HDG | 600                | 600               | 5.78      |
| MIS60R4 7570 15 HDG | 700                | 600               | 6.15      |
| MIS60R4 7575 15 HDG | 750                | 600               | 6.33      |
| MIS60R4 7580 15 HDG | 800                | 600               | 6.51      |
| MIS60R4 7590 15 HDG | 900                | 600               | 6.88      |
| MIS60R4 7500 15 HDG | 1000               | 600               | 7.25      |
| MIS60R4 7502 15 HDG | 1200               | 600               | 7.98      |

| MIS60R4... H75    |                    | 2.0mm             |           |
|-------------------|--------------------|-------------------|-----------|
| CODE              | Width<br>a=b<br>mm | Radius<br>R<br>mm | kg<br>1pc |
| MISR4 7510 20 HDG | 100                | 600               | 5.25      |
| MISR4 7515 20 HDG | 150                | 600               | 5.50      |
| MISR4 7520 20 HDG | 200                | 600               | 5.74      |
| MISR4 7525 20 HDG | 250                | 600               | 5.99      |
| MISR4 7530 20 HDG | 300                | 600               | 6.23      |
| MISR4 7540 20 HDG | 400                | 600               | 6.72      |
| MISR4 7545 20 HDG | 450                | 600               | 6.97      |
| MISR4 7550 20 HDG | 500                | 600               | 7.21      |
| MISR4 7560 20 HDG | 600                | 600               | 7.70      |
| MISR4 7570 20 HDG | 700                | 600               | 8.19      |
| MISR4 7575 20 HDG | 750                | 600               | 8.44      |
| MISR4 7580 20 HDG | 800                | 600               | 8.68      |
| MISR4 7590 20 HDG | 900                | 600               | 9.17      |
| MISR4 7500 20 HDG | 1000               | 600               | 9.66      |
| MISR4 7502 20 HDG | 1200               | 600               | 10.64     |

### MIS60R3 H75 HDG

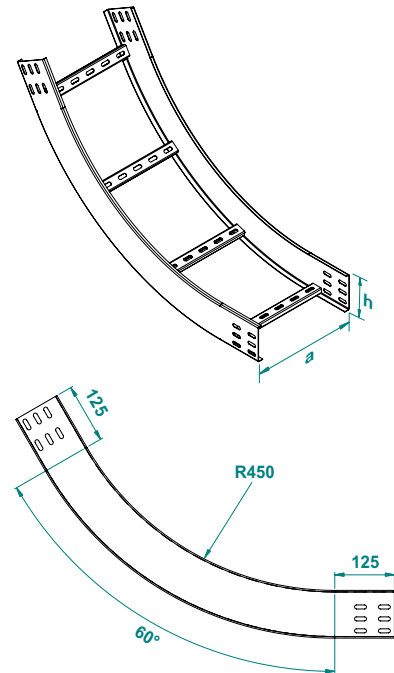

### MIS60R4 H75 HDG

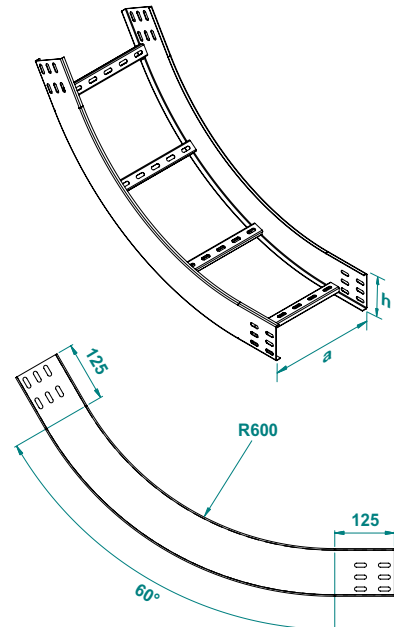

### APPLICATIONS

Cable routing

### MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method to TS-EN 10346:2011 (PG)  
SS- stainless steel AISI 304L and AISI 316L (SS)  
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0

# Cable Ladder Systems of Side Height 75



**MTK**  
MADE IN TURKEY

## Vertical 45° Inside Bend of Cable Ladder (stable)

45° Dikey Merdiven İç Bükey Elemanı-(Sabit) - Арка фиксированная кабельроста, внутренняя 45°



Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8


### Hot-Dip Galvanized

| MIS45... H75      |                    | 1.5mm             |           |
|-------------------|--------------------|-------------------|-----------|
| CODE              | Width<br>a=b<br>mm | Radius<br>R<br>mm | kg<br>1pc |
| MIS45 7510 15 HDG | 100                | 150               | 0.98      |
| MIS45 7515 15 HDG | 150                | 150               | 1.06      |
| MIS45 7520 15 HDG | 200                | 150               | 1.15      |
| MIS45 7525 15 HDG | 250                | 150               | 1.23      |
| MIS45 7530 15 HDG | 300                | 150               | 1.31      |
| MIS45 7540 15 HDG | 400                | 150               | 1.48      |
| MIS45 7545 15 HDG | 450                | 150               | 1.56      |
| MIS45 7550 15 HDG | 500                | 150               | 1.64      |
| MIS45 7560 15 HDG | 600                | 150               | 1.81      |
| MIS45 7570 15 HDG | 700                | 150               | 1.97      |
| MIS45 7575 15 HDG | 750                | 150               | 2.05      |
| MIS45 7580 15 HDG | 800                | 150               | 2.14      |
| MIS45 7590 15 HDG | 900                | 150               | 2.30      |
| MIS45 7500 15 HDG | 1000               | 150               | 2.47      |
| MIS45 7502 15 HDG | 1200               | 150               | 2.80      |

| MIS45... H75      |                    | 2.0mm             |           |
|-------------------|--------------------|-------------------|-----------|
| CODE              | Width<br>a=b<br>mm | Radius<br>R<br>mm | kg<br>1pc |
| MIS45 7510 20 HDG | 100                | 150               | 1.31      |
| MIS45 7515 20 HDG | 150                | 150               | 1.42      |
| MIS45 7520 20 HDG | 200                | 150               | 1.53      |
| MIS45 7525 20 HDG | 250                | 150               | 1.64      |
| MIS45 7530 20 HDG | 300                | 150               | 1.75      |
| MIS45 7540 20 HDG | 400                | 150               | 1.97      |
| MIS45 7545 20 HDG | 450                | 150               | 2.08      |
| MIS45 7550 20 HDG | 500                | 150               | 2.19      |
| MIS45 7560 20 HDG | 600                | 150               | 2.41      |
| MIS45 7570 20 HDG | 700                | 150               | 2.63      |
| MIS45 7575 20 HDG | 750                | 150               | 2.74      |
| MIS45 7580 20 HDG | 800                | 150               | 2.85      |
| MIS45 7590 20 HDG | 900                | 150               | 3.07      |
| MIS45 7500 20 HDG | 1000               | 150               | 3.29      |
| MIS45 7502 20 HDG | 1200               | 150               | 3.73      |

## Vertical 45° Inside Bend of Cable Ladder (stable) Radius:300

45° Dikey Merdiven İç Bükey Elemanı-(Sabit) Radyus:300 - Арка фиксированная кабельроста, внутренняя 45° радиус:300

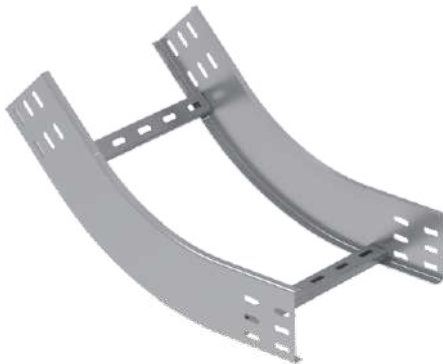

Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

### Hot-Dip Galvanized



| MIS45R2... H75     |                    | 1.5mm             |           |
|--------------------|--------------------|-------------------|-----------|
| CODE               | Width<br>a=b<br>mm | Radius<br>R<br>mm | kg<br>1pc |
| MIS45R2 810 15 HDG | 100                | 300               | 1.99      |
| MIS45R2 815 15 HDG | 150                | 300               | 2.08      |
| MIS45R2 820 15 HDG | 200                | 300               | 2.17      |
| MIS45R2 825 15 HDG | 250                | 300               | 2.26      |
| MIS45R2 830 15 HDG | 300                | 300               | 2.36      |
| MIS45R2 840 15 HDG | 400                | 300               | 2.54      |
| MIS45R2 845 15 HDG | 450                | 300               | 2.63      |
| MIS45R2 850 15 HDG | 500                | 300               | 2.72      |
| MIS45R2 860 15 HDG | 600                | 300               | 2.91      |
| MIS45R2 870 15 HDG | 700                | 300               | 3.09      |
| MIS45R2 875 15 HDG | 750                | 300               | 3.18      |
| MIS45R2 880 15 HDG | 800                | 300               | 3.27      |
| MIS45R2 890 15 HDG | 900                | 300               | 3.46      |
| MIS45R2 800 15 HDG | 1000               | 300               | 3.64      |
| MIS45R2 802 15 HDG | 1200               | 300               | 4.01      |

| MIS45R2... H70     |                    | 2.0mm             |           |
|--------------------|--------------------|-------------------|-----------|
| CODE               | Width<br>a=b<br>mm | Radius<br>R<br>mm | kg<br>1pc |
| MIS45R2 810 20 HDG | 100                | 300               | 2.65      |
| MIS45R2 815 20 HDG | 150                | 300               | 2.77      |
| MIS45R2 820 20 HDG | 200                | 300               | 2.89      |
| MIS45R2 825 20 HDG | 250                | 300               | 3.02      |
| MIS45R2 830 20 HDG | 300                | 300               | 3.14      |
| MIS45R2 840 20 HDG | 400                | 300               | 3.38      |
| MIS45R2 845 20 HDG | 450                | 300               | 3.51      |
| MIS45R2 850 20 HDG | 500                | 300               | 3.63      |
| MIS45R2 860 20 HDG | 600                | 300               | 3.87      |
| MIS45R2 870 20 HDG | 700                | 300               | 4.12      |
| MIS45R2 875 20 HDG | 750                | 300               | 4.24      |
| MIS45R2 880 20 HDG | 800                | 300               | 4.36      |
| MIS45R2 890 20 HDG | 900                | 300               | 4.61      |
| MIS45R2 800 20 HDG | 1000               | 300               | 4.85      |
| MIS45R2 802 20 HDG | 1200               | 300               | 5.34      |

## MIS45 H75 HDG

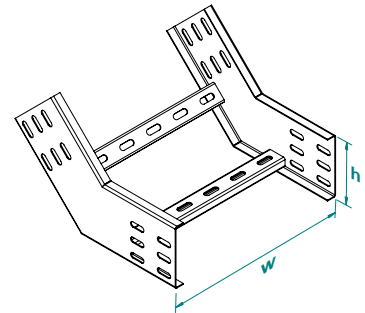

## MIS45R2 H75 HDG

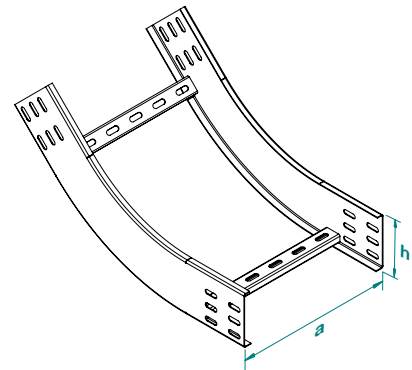

### APPLICATIONS

Cable routing

### MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method

to TS-EN 10346:2011 (PG)

SS- stainless steel AISI 304L and AISI 316L (SS)

EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0




# Cable Ladder Systems of Side Height 75



**MTK**  
MADE IN TURKEY

## Vertical 45° Inside Bend of Cable Ladder (stable) Radius:450

45° Dikey Merdiven İç Büküye Elemanı-(Sabit) Radyus:450 - Арка фиксированная кабельроста, внутренняя 45° радиус:450

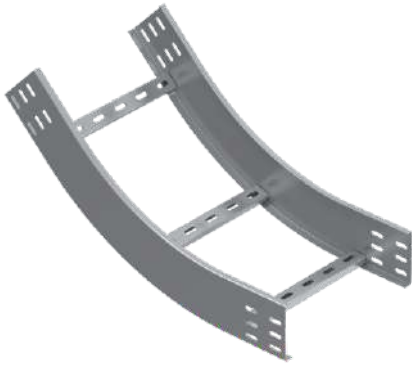

Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8


### Hot-Dip Galvanized

| MIS45R3... H75      |                    | 1.5mm             |           |     |  |
|---------------------|--------------------|-------------------|-----------|-----|--|
| CODE                | Width<br>a=b<br>mm | Radius<br>R<br>mm | kg<br>1pc | pcs |  |
| MIS45R3 7510 15 HDG | 100                | 450               | 2.50      | 1   |  |
| MIS45R3 7515 15 HDG | 150                | 450               | 2.64      | 1   |  |
| MIS45R3 7520 15 HDG | 200                | 450               | 2.78      | 1   |  |
| MIS45R3 7525 15 HDG | 250                | 450               | 2.91      | 1   |  |
| MIS45R3 7530 15 HDG | 300                | 450               | 3.05      | 1   |  |
| MIS45R3 7540 15 HDG | 400                | 450               | 3.33      | 1   |  |
| MIS45R3 7545 15 HDG | 450                | 450               | 3.46      | 1   |  |
| MIS45R3 7550 15 HDG | 500                | 450               | 3.60      | 1   |  |
| MIS45R3 7560 15 HDG | 600                | 450               | 3.88      | 1   |  |
| MIS45R3 7570 15 HDG | 700                | 450               | 4.15      | 1   |  |
| MIS45R3 7575 15 HDG | 750                | 450               | 4.29      | 1   |  |
| MIS45R3 7580 15 HDG | 800                | 450               | 4.43      | 1   |  |
| MIS45R3 7590 15 HDG | 900                | 450               | 4.70      | 1   |  |
| MIS45R3 7500 15 HDG | 1000               | 450               | 4.98      | 1   |  |
| MIS45R3 7502 15 HDG | 1200               | 450               | 5.53      | 1   |  |

| MIS45R3... H75      |                    | 2.0mm             |           |     |  |
|---------------------|--------------------|-------------------|-----------|-----|--|
| CODE                | Width<br>a=b<br>mm | Radius<br>R<br>mm | kg<br>1pc | pcs |  |
| MIS45R3 7510 20 HDG | 100                | 450               | 3.33      | 1   |  |
| MIS45R3 7515 20 HDG | 150                | 450               | 3.52      | 1   |  |
| MIS45R3 7520 20 HDG | 200                | 450               | 3.70      | 1   |  |
| MIS45R3 7525 20 HDG | 250                | 450               | 3.88      | 1   |  |
| MIS45R3 7530 20 HDG | 300                | 450               | 4.07      | 1   |  |
| MIS45R3 7540 20 HDG | 400                | 450               | 4.43      | 1   |  |
| MIS45R3 7545 20 HDG | 450                | 450               | 4.62      | 1   |  |
| MIS45R3 7550 20 HDG | 500                | 450               | 4.80      | 1   |  |
| MIS45R3 7560 20 HDG | 600                | 450               | 5.17      | 1   |  |
| MIS45R3 7570 20 HDG | 700                | 450               | 5.54      | 1   |  |
| MIS45R3 7575 20 HDG | 750                | 450               | 5.72      | 1   |  |
| MIS45R3 7580 20 HDG | 800                | 450               | 5.90      | 1   |  |
| MIS45R3 7590 20 HDG | 900                | 450               | 6.27      | 1   |  |
| MIS45R3 7500 20 HDG | 1000               | 450               | 6.64      | 1   |  |
| MIS45R3 7502 20 HDG | 1200               | 450               | 7.37      | 1   |  |

## Vertical 45° Inside Bend of Cable Ladder (stable) Radius:600

45° Dikey Merdiven İç Büküye Elemanı-(Sabit) Radyus:600 - Арка фиксированная кабельроста, внутренняя 45° радиус:600

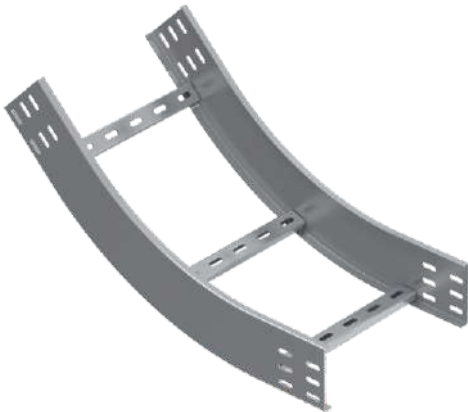

Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

### Hot-Dip Galvanized



| MIS45R4... H75      |                    | 1.5mm             |           |     |  |
|---------------------|--------------------|-------------------|-----------|-----|--|
| CODE                | Width<br>a=b<br>mm | Radius<br>R<br>mm | kg<br>1pc | pcs |  |
| MIS45R4 7510 15 HDG | 100                | 600               | 3.10      | 1   |  |
| MIS45R4 7515 15 HDG | 150                | 600               | 3.24      | 1   |  |
| MIS45R4 7520 15 HDG | 200                | 600               | 3.38      | 1   |  |
| MIS45R4 7525 15 HDG | 250                | 600               | 3.51      | 1   |  |
| MIS45R4 7530 15 HDG | 300                | 600               | 3.65      | 1   |  |
| MIS45R4 7540 15 HDG | 400                | 600               | 3.93      | 1   |  |
| MIS45R4 7545 15 HDG | 450                | 600               | 4.06      | 1   |  |
| MIS45R4 7550 15 HDG | 500                | 600               | 4.20      | 1   |  |
| MIS45R4 7560 15 HDG | 600                | 600               | 4.48      | 1   |  |
| MIS45R4 7570 15 HDG | 700                | 600               | 4.75      | 1   |  |
| MIS45R4 7575 15 HDG | 750                | 600               | 4.89      | 1   |  |
| MIS45R4 7580 15 HDG | 800                | 600               | 5.03      | 1   |  |
| MIS45R4 7590 15 HDG | 900                | 600               | 5.30      | 1   |  |
| MIS45R4 7500 15 HDG | 1000               | 600               | 5.58      | 1   |  |
| MIS45R4 7502 15 HDG | 1200               | 600               | 6.13      | 1   |  |

| MIS45R4... H75      |                    | 2.0mm             |           |     |  |
|---------------------|--------------------|-------------------|-----------|-----|--|
| CODE                | Width<br>a=b<br>mm | Radius<br>R<br>mm | kg<br>1pc | pcs |  |
| MIS45R4 7510 20 HDG | 100                | 600               | 4.13      | 1   |  |
| MIS45R4 7515 20 HDG | 150                | 600               | 4.32      | 1   |  |
| MIS45R4 7520 20 HDG | 200                | 600               | 4.50      | 1   |  |
| MIS45R4 7525 20 HDG | 250                | 600               | 4.68      | 1   |  |
| MIS45R4 7530 20 HDG | 300                | 600               | 4.87      | 1   |  |
| MIS45R4 7540 20 HDG | 400                | 600               | 5.23      | 1   |  |
| MIS45R4 7545 20 HDG | 450                | 600               | 5.42      | 1   |  |
| MIS45R4 7550 20 HDG | 500                | 600               | 5.60      | 1   |  |
| MIS45R4 7560 20 HDG | 600                | 600               | 5.97      | 1   |  |
| MIS45R4 7570 20 HDG | 700                | 600               | 6.34      | 1   |  |
| MIS45R4 7575 20 HDG | 750                | 600               | 6.52      | 1   |  |
| MIS45R4 7580 20 HDG | 800                | 600               | 6.70      | 1   |  |
| MIS45R4 7590 20 HDG | 900                | 600               | 7.07      | 1   |  |
| MIS45R4 7500 20 HDG | 1000               | 600               | 7.44      | 1   |  |
| MIS45R4 7502 20 HDG | 1200               | 600               | 8.17      | 1   |  |

### MIS45R3 H75 HDG

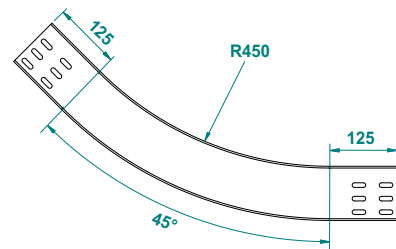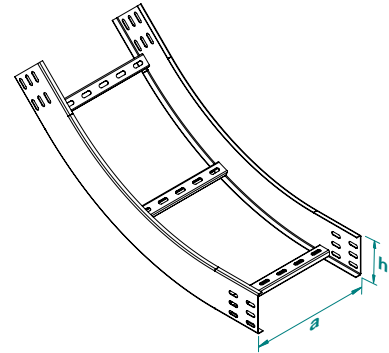

### MIS45R4 H75 HDG

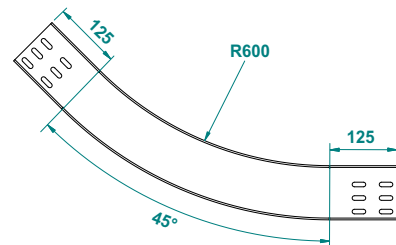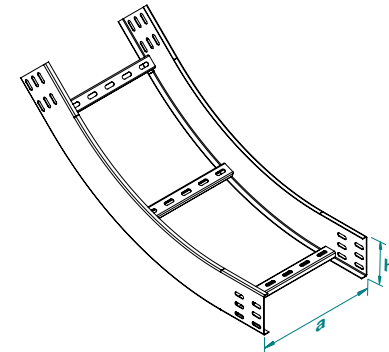

### APPLICATIONS

Cable routing

### MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method

to TS-EN 10346:2011 (PG)

SS- stainless steel AISI 304L and AISI 316L (SS)

EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0


# Cable Ladder Systems of Side Height 75



**MTK**  
MADE IN TURKEY

## Vertical 30° Inside Bend of Cable Ladder (stable)

30° Dikey Merdiven İç Bükey Elemanı-(Sabit) - Арка фиксированная кабельроста, внутренняя 30°

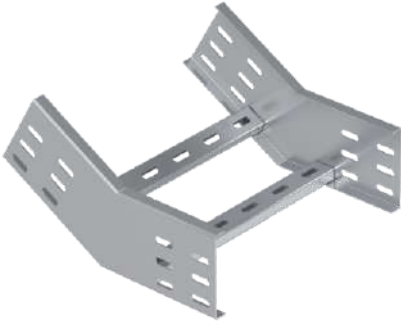

Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8


### Hot-Dip Galvanized

| MIS30... H75      |                    | 1.5mm             |           |
|-------------------|--------------------|-------------------|-----------|
| CODE              | Width<br>a=b<br>mm | Radius<br>R<br>mm | kg<br>1pc |
| MIS30 7510 15 HDG | 100                | 150               | 0.98      |
| MIS30 7515 15 HDG | 150                | 150               | 1.06      |
| MIS30 7520 15 HDG | 200                | 150               | 1.15      |
| MIS30 7525 15 HDG | 250                | 150               | 1.23      |
| MIS30 7530 15 HDG | 300                | 150               | 1.31      |
| MIS30 7540 15 HDG | 400                | 150               | 1.48      |
| MIS30 7545 15 HDG | 450                | 150               | 1.56      |
| MIS30 7550 15 HDG | 500                | 150               | 1.64      |
| MIS30 7560 15 HDG | 600                | 150               | 1.81      |
| MIS30 7570 15 HDG | 700                | 150               | 1.97      |
| MIS30 7575 15 HDG | 750                | 150               | 2.05      |
| MIS30 7580 15 HDG | 800                | 150               | 2.14      |
| MIS30 7590 15 HDG | 900                | 150               | 2.30      |
| MIS30 7500 15 HDG | 1000               | 150               | 2.47      |
| MIS30 7502 15 HDG | 1200               | 150               | 2.80      |

| MIS30... H75      |                    | 2.0mm             |           |
|-------------------|--------------------|-------------------|-----------|
| CODE              | Width<br>a=b<br>mm | Radius<br>R<br>mm | kg<br>1pc |
| MIS30 7510 20 HDG | 100                | 150               | 1.31      |
| MIS30 7515 20 HDG | 150                | 150               | 1.42      |
| MIS30 7520 20 HDG | 200                | 150               | 1.53      |
| MIS30 7525 20 HDG | 250                | 150               | 1.64      |
| MIS30 7530 20 HDG | 300                | 150               | 1.75      |
| MIS30 7540 20 HDG | 400                | 150               | 1.97      |
| MIS30 7545 20 HDG | 450                | 150               | 2.08      |
| MIS30 7550 20 HDG | 500                | 150               | 2.19      |
| MIS30 7560 20 HDG | 600                | 150               | 2.41      |
| MIS30 7570 20 HDG | 700                | 150               | 2.63      |
| MIS30 7575 20 HDG | 750                | 150               | 2.74      |
| MIS30 7580 20 HDG | 800                | 150               | 2.85      |
| MIS30 7590 20 HDG | 900                | 150               | 3.07      |
| MIS30 7500 20 HDG | 1000               | 150               | 3.29      |
| MIS30 7502 20 HDG | 1200               | 150               | 3.73      |

## Vertical 30° Inside Bend of Cable Ladder (stable) Radius:300

30° Dikey Merdiven İç Bükey Elemanı-(Sabit) Radyus:300 - Арка фиксированная кабельроста, внутренняя 30° радиус:300

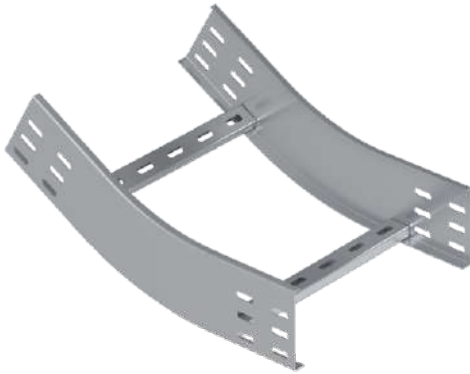

Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

### Hot-Dip Galvanized



| MIS30R2... H75      |                    | 1.5mm             |           |
|---------------------|--------------------|-------------------|-----------|
| CODE                | Width<br>a=b<br>mm | Radius<br>R<br>mm | kg<br>1pc |
| MIS30R2 7510 15 HDG | 100                | 300               | 1.24      |
| MIS30R2 7515 15 HDG | 150                | 300               | 1.33      |
| MIS30R2 7520 15 HDG | 200                | 300               | 1.42      |
| MIS30R2 7525 15 HDG | 250                | 300               | 1.51      |
| MIS30R2 7530 15 HDG | 300                | 300               | 1.61      |
| MIS30R2 7540 15 HDG | 400                | 300               | 1.79      |
| MIS30R2 7545 15 HDG | 450                | 300               | 1.88      |
| MIS30R2 7550 15 HDG | 500                | 300               | 1.97      |
| MIS30R2 7560 15 HDG | 600                | 300               | 2.16      |
| MIS30R2 7570 15 HDG | 700                | 300               | 2.34      |
| MIS30R2 7575 15 HDG | 750                | 300               | 2.43      |
| MIS30R2 7580 15 HDG | 800                | 300               | 2.52      |
| MIS30R2 7590 15 HDG | 900                | 300               | 2.71      |
| MIS30R2 7500 15 HDG | 1000               | 300               | 2.89      |
| MIS30R2 7502 15 HDG | 1200               | 300               | 3.26      |

| MIS30R2... H75      |                    | 2.0mm             |           |
|---------------------|--------------------|-------------------|-----------|
| CODE                | Width<br>a=b<br>mm | Radius<br>R<br>mm | kg<br>1pc |
| MIS30R2 7510 20 HDG | 100                | 300               | 1.65      |
| MIS30R2 7515 20 HDG | 150                | 300               | 1.77      |
| MIS30R2 7520 20 HDG | 200                | 300               | 1.89      |
| MIS30R2 7525 20 HDG | 250                | 300               | 2.02      |
| MIS30R2 7530 20 HDG | 300                | 300               | 2.14      |
| MIS30R2 7540 20 HDG | 400                | 300               | 2.38      |
| MIS30R2 7545 20 HDG | 450                | 300               | 2.51      |
| MIS30R2 7550 20 HDG | 500                | 300               | 2.63      |
| MIS30R2 7560 20 HDG | 600                | 300               | 2.87      |
| MIS30R2 7570 20 HDG | 700                | 300               | 3.12      |
| MIS30R2 7575 20 HDG | 750                | 300               | 3.24      |
| MIS30R2 7580 20 HDG | 800                | 300               | 3.36      |
| MIS30R2 7590 20 HDG | 900                | 300               | 3.61      |
| MIS30R2 7500 20 HDG | 1000               | 300               | 3.85      |
| MIS30R2 7502 20 HDG | 1200               | 300               | 4.34      |

## MIS30 H75 HDG

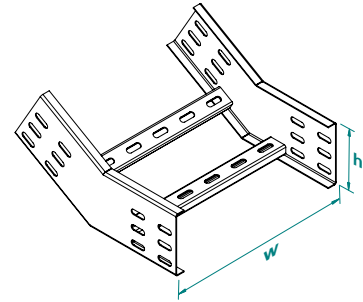

## MIS30R2 H75 HDG

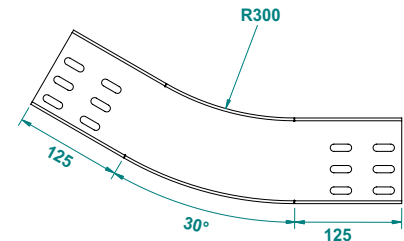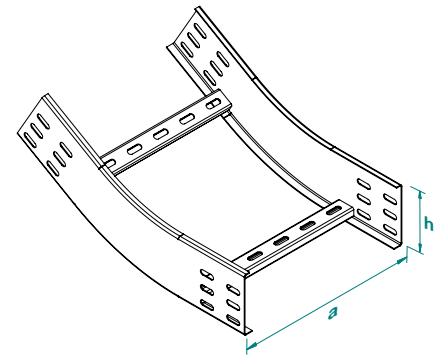

### APPLICATIONS

Cable routing

### MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method  
to TS-EN 10346:2011 (PG)  
SS- stainless steel AISI 304L and AISI 316L (SS)  
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0

# Cable Ladder Systems of Side Height 75



## Vertical 30° Inside Bend of Cable Ladder (stable) Radius:450

30° Dikey Merdiven İç Bükey Elemanı-(Sabit) Radyus:450 - Арка фиксированная кабельроста, внутренняя 30° радиус:450



Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

### Hot-Dip Galvanized

| MIS30R3... H75      |                    | 1.5mm             |           |
|---------------------|--------------------|-------------------|-----------|
| CODE                | Width<br>a=b<br>mm | Radius<br>R<br>mm | kg<br>1pc |
| MIS30R3 7510 15 HDG | 100                | 450               | 1.39      |
| MIS30R3 7515 15 HDG | 150                | 450               | 1.48      |
| MIS30R3 7520 15 HDG | 200                | 450               | 1.57      |
| MIS30R3 7525 15 HDG | 250                | 450               | 1.66      |
| MIS30R3 7530 15 HDG | 300                | 450               | 1.76      |
| MIS30R3 7540 15 HDG | 400                | 450               | 1.94      |
| MIS30R3 7545 15 HDG | 450                | 450               | 2.03      |
| MIS30R3 7550 15 HDG | 500                | 450               | 2.12      |
| MIS30R3 7560 15 HDG | 600                | 450               | 2.31      |
| MIS30R3 7570 15 HDG | 700                | 450               | 2.49      |
| MIS30R3 7575 15 HDG | 750                | 450               | 2.58      |
| MIS30R3 7580 15 HDG | 800                | 450               | 2.67      |
| MIS30R3 7590 15 HDG | 900                | 450               | 2.86      |
| MIS30R3 7500 15 HDG | 1000               | 450               | 3.04      |
| MIS30R3 7502 15 HDG | 1200               | 450               | 3.41      |

| MIS30R3... H75      |                    | 2.0mm             |           |
|---------------------|--------------------|-------------------|-----------|
| CODE                | Width<br>a=b<br>mm | Radius<br>R<br>mm | kg<br>1pc |
| MIS30R3 7510 20 HDG | 100                | 450               | 1.85      |
| MIS30R3 7515 20 HDG | 150                | 450               | 1.97      |
| MIS30R3 7520 20 HDG | 200                | 450               | 2.09      |
| MIS30R3 7525 20 HDG | 250                | 450               | 2.22      |
| MIS30R3 7530 20 HDG | 300                | 450               | 2.34      |
| MIS30R3 7540 20 HDG | 400                | 450               | 2.58      |
| MIS30R3 7545 20 HDG | 450                | 450               | 2.71      |
| MIS30R3 7550 20 HDG | 500                | 450               | 2.83      |
| MIS30R3 7560 20 HDG | 600                | 450               | 3.07      |
| MIS30R3 7570 20 HDG | 700                | 450               | 3.32      |
| MIS30R3 7575 20 HDG | 750                | 450               | 3.44      |
| MIS30R3 7580 20 HDG | 800                | 450               | 3.56      |
| MIS30R3 7590 20 HDG | 900                | 450               | 3.81      |
| MIS30R3 7500 20 HDG | 1000               | 450               | 4.05      |
| MIS30R3 7502 20 HDG | 1200               | 450               | 4.54      |

## Vertical 30° Inside Bend of Cable Ladder (stable) Radius:600

30° Dikey Merdiven İç Bükey Elemanı-(Sabit) Radyus:600 - Арка фиксированная кабельроста, внутренняя 30° радиус:600



Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

### Hot-Dip Galvanized



| MIS30R4... H75      |                    | 1.5mm             |           |
|---------------------|--------------------|-------------------|-----------|
| CODE                | Width<br>a=b<br>mm | Radius<br>R<br>mm | kg<br>1pc |
| MIS30R4 7510 15 HDG | 100                | 600               | 2.35      |
| MIS30R4 7515 15 HDG | 150                | 600               | 2.49      |
| MIS30R4 7520 15 HDG | 200                | 600               | 2.63      |
| MIS30R4 7525 15 HDG | 250                | 600               | 2.76      |
| MIS30R4 7530 15 HDG | 300                | 600               | 2.90      |
| MIS30R4 7540 15 HDG | 400                | 600               | 3.18      |
| MIS30R4 7545 15 HDG | 450                | 600               | 3.31      |
| MIS30R4 7550 15 HDG | 500                | 600               | 3.45      |
| MIS30R4 7560 15 HDG | 600                | 600               | 3.73      |
| MIS30R4 7570 15 HDG | 700                | 600               | 4.00      |
| MIS30R4 7575 15 HDG | 750                | 600               | 4.14      |
| MIS30R4 7580 15 HDG | 800                | 600               | 4.28      |
| MIS30R4 7590 15 HDG | 900                | 600               | 4.55      |
| MIS30R4 7500 15 HDG | 1000               | 600               | 4.83      |
| MIS30R4 7502 15 HDG | 1200               | 600               | 5.38      |

| MIS30R4... H75      |                    | 2.0mm             |           |
|---------------------|--------------------|-------------------|-----------|
| CODE                | Width<br>a=b<br>mm | Radius<br>R<br>mm | kg<br>1pc |
| MIS30R4 7510 20 HDG | 100                | 600               | 3.13      |
| MIS30R4 7515 20 HDG | 150                | 600               | 3.32      |
| MIS30R4 7520 20 HDG | 200                | 600               | 3.50      |
| MIS30R4 7525 20 HDG | 250                | 600               | 3.68      |
| MIS30R4 7530 20 HDG | 300                | 600               | 3.87      |
| MIS30R4 7540 20 HDG | 400                | 600               | 4.23      |
| MIS30R4 7545 20 HDG | 450                | 600               | 4.42      |
| MIS30R4 7550 20 HDG | 500                | 600               | 4.60      |
| MIS30R4 7560 20 HDG | 600                | 600               | 4.97      |
| MIS30R4 7570 20 HDG | 700                | 600               | 5.34      |
| MIS30R4 7575 20 HDG | 750                | 600               | 5.52      |
| MIS30R4 7580 20 HDG | 800                | 600               | 5.70      |
| MIS30R4 7590 20 HDG | 900                | 600               | 6.07      |
| MIS30R4 7500 20 HDG | 1000               | 600               | 6.44      |
| MIS30R4 7502 20 HDG | 1200               | 600               | 7.17      |

### MIS30R3 H75 HDG

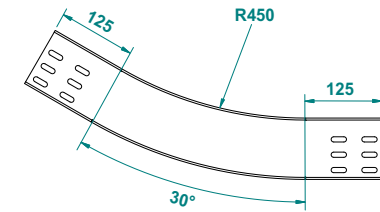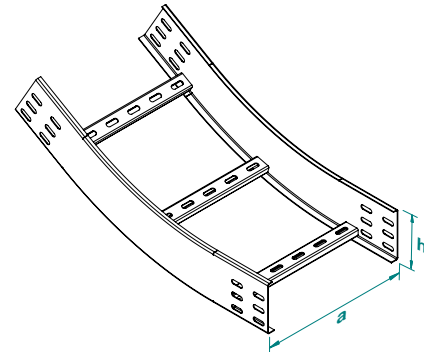

### MIS30R4 H75 HDG

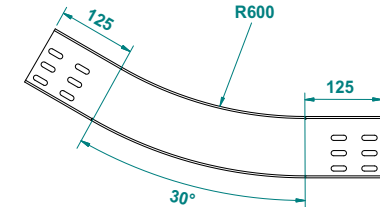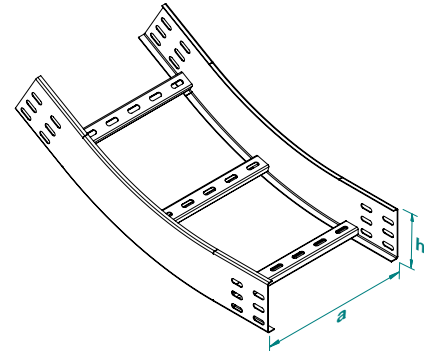

### APPLICATIONS

Cable routing

### MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method to TS-EN 10346:2011 (PG)  
SS- stainless steel AISI 304L and AISI 316L (SS)  
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0


# Cable Ladder Systems of Side Height 75



**MTK**  
MADE IN TURKEY

## Vertical 90° Outside Bend of Cable Ladder (stable)

90° Dikey Merdiven Dış Bükey Elemanı-(Sabit) - Арка фиксированная кабельроста, внешняя 90°

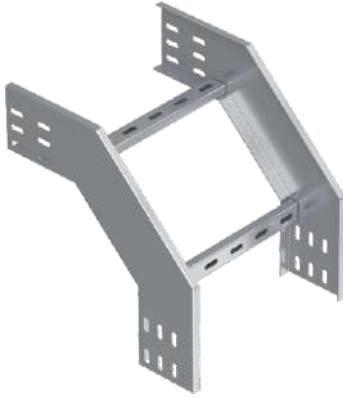

### Hot-Dip Galvanized

| MDS... H75      |                    | 1.5mm             |           |     |  |
|-----------------|--------------------|-------------------|-----------|-----|--|
| CODE            | Width<br>a=b<br>mm | Radius<br>R<br>mm | kg<br>1pc | pcs |  |
| MDS 7510 15 HDG | 100                | 150               | 1.74      | 1   |  |
| MDS 7515 15 HDG | 150                | 150               | 1.87      | 1   |  |
| MDS 7520 15 HDG | 200                | 150               | 1.99      | 1   |  |
| MDS 7525 15 HDG | 250                | 150               | 2.11      | 1   |  |
| MDS 7530 15 HDG | 300                | 150               | 2.24      | 1   |  |
| MDS 7540 15 HDG | 400                | 150               | 2.48      | 1   |  |
| MDS 7545 15 HDG | 450                | 150               | 2.61      | 1   |  |
| MDS 7550 15 HDG | 500                | 150               | 2.73      | 1   |  |
| MDS 7560 15 HDG | 600                | 150               | 2.98      | 1   |  |
| MDS 7570 15 HDG | 700                | 150               | 3.23      | 1   |  |
| MDS 7575 15 HDG | 750                | 150               | 3.35      | 1   |  |
| MDS 7580 15 HDG | 800                | 150               | 3.47      | 1   |  |
| MDS 7590 15 HDG | 900                | 150               | 3.72      | 1   |  |
| MDS 7500 15 HDG | 1000               | 150               | 3.97      | 1   |  |
| MDS 7502 15 HDG | 1200               | 150               | 4.46      | 1   |  |

Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

| MDS... H75      |                    | 2.0mm             |           |     |  |
|-----------------|--------------------|-------------------|-----------|-----|--|
| CODE            | Width<br>a=b<br>mm | Radius<br>R<br>mm | kg<br>1pc | pcs |  |
| MDS 7510 20 HDG | 100                | 150               | 2.32      | 1   |  |
| MDS 7515 20 HDG | 150                | 150               | 2.49      | 1   |  |
| MDS 7520 20 HDG | 200                | 150               | 2.65      | 1   |  |
| MDS 7525 20 HDG | 250                | 150               | 2.82      | 1   |  |
| MDS 7530 20 HDG | 300                | 150               | 2.98      | 1   |  |
| MDS 7540 20 HDG | 400                | 150               | 3.31      | 1   |  |
| MDS 7545 20 HDG | 450                | 150               | 3.47      | 1   |  |
| MDS 7550 20 HDG | 500                | 150               | 3.64      | 1   |  |
| MDS 7560 20 HDG | 600                | 150               | 3.97      | 1   |  |
| MDS 7570 20 HDG | 700                | 150               | 4.30      | 1   |  |
| MDS 7575 20 HDG | 750                | 150               | 4.46      | 1   |  |
| MDS 7580 20 HDG | 800                | 150               | 4.63      | 1   |  |
| MDS 7590 20 HDG | 900                | 150               | 4.96      | 1   |  |
| MDS 7500 20 HDG | 1000               | 150               | 5.29      | 1   |  |
| MDS 7502 20 HDG | 1200               | 150               | 5.95      | 1   |  |

## Vertical 90° Outside Bend of Cable Ladder (stable) Radius:300

90° Dikey Merdiven Dış Bükey Elemanı-(Sabit) Radyus:300 - Арка фиксированная кабельроста, внешняя 90° радиус:300



### Hot-Dip Galvanized



| MDSR2... H75      |                    | 1.5mm             |           |     |  |
|-------------------|--------------------|-------------------|-----------|-----|--|
| CODE              | Width<br>a=b<br>mm | Radius<br>R<br>mm | kg<br>1pc | pcs |  |
| MDSR2 7510 15 HDG | 100                | 300               | 3.58      | 1   |  |
| MDSR2 7515 15 HDG | 150                | 300               | 3.72      | 1   |  |
| MDSR2 7520 15 HDG | 200                | 300               | 3.86      | 1   |  |
| MDSR2 7525 15 HDG | 250                | 300               | 3.99      | 1   |  |
| MDSR2 7530 15 HDG | 300                | 300               | 4.13      | 1   |  |
| MDSR2 7540 15 HDG | 400                | 300               | 4.41      | 1   |  |
| MDSR2 7545 15 HDG | 450                | 300               | 4.54      | 1   |  |
| MDSR2 7550 15 HDG | 500                | 300               | 4.68      | 1   |  |
| MDSR2 7560 15 HDG | 600                | 300               | 4.96      | 1   |  |
| MDSR2 7570 15 HDG | 700                | 300               | 5.23      | 1   |  |
| MDSR2 7575 15 HDG | 750                | 300               | 5.37      | 1   |  |
| MDSR2 7580 15 HDG | 800                | 300               | 5.51      | 1   |  |
| MDSR2 7590 15 HDG | 900                | 300               | 5.78      | 1   |  |
| MDSR2 7500 15 HDG | 1000               | 300               | 6.06      | 1   |  |
| MDSR2 7502 15 HDG | 1200               | 300               | 6.61      | 1   |  |

Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

| MDSR2... H75      |                    | 2.0mm             |           |     |  |
|-------------------|--------------------|-------------------|-----------|-----|--|
| CODE              | Width<br>a=b<br>mm | Radius<br>R<br>mm | kg<br>1pc | pcs |  |
| MDSR2 7510 20 HDG | 100                | 300               | 4.77      | 1   |  |
| MDSR2 7515 20 HDG | 150                | 300               | 4.96      | 1   |  |
| MDSR2 7520 20 HDG | 200                | 300               | 5.14      | 1   |  |
| MDSR2 7525 20 HDG | 250                | 300               | 5.32      | 1   |  |
| MDSR2 7530 20 HDG | 300                | 300               | 5.51      | 1   |  |
| MDSR2 7540 20 HDG | 400                | 300               | 5.87      | 1   |  |
| MDSR2 7545 20 HDG | 450                | 300               | 6.06      | 1   |  |
| MDSR2 7550 20 HDG | 500                | 300               | 6.24      | 1   |  |
| MDSR2 7560 20 HDG | 600                | 300               | 6.61      | 1   |  |
| MDSR2 7570 20 HDG | 700                | 300               | 6.98      | 1   |  |
| MDSR2 7575 20 HDG | 750                | 300               | 7.16      | 1   |  |
| MDSR2 7580 20 HDG | 800                | 300               | 7.34      | 1   |  |
| MDSR2 7590 20 HDG | 900                | 300               | 7.71      | 1   |  |
| MDSR2 7500 20 HDG | 1000               | 300               | 8.08      | 1   |  |
| MDSR2 7502 20 HDG | 1200               | 300               | 8.81      | 1   |  |

### MDS H75 HDG



### MDSR2 H75 HDG

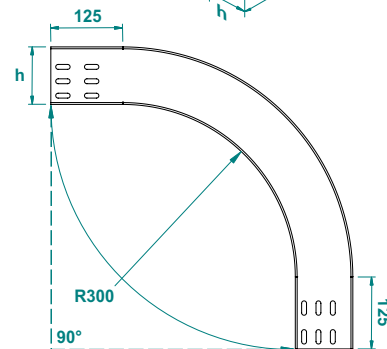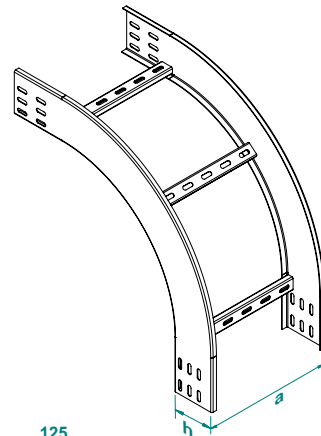

### APPLICATIONS

Cable routing

### MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method  
to TS-EN 10346:2011 (PG)  
SS- stainless steel AISI 304L and AISI 316L (SS)  
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: **1.5 2.0**

# Cable Ladder Systems of Side Height 75



**MTK**  
MADE IN TURKEY

## Vertical 90° Outside Bend of Cable Ladder (stable) Radius:450

90° Dikey Merdiven Dış Bükey Elemanı-(Sabit) Radyus:450 - Арка фиксированная кабельроста, внешняя 90° радиус:450



### Hot-Dip Galvanized

Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

| MDSR3... H75      |                    | 1.5mm             |           |
|-------------------|--------------------|-------------------|-----------|
| CODE              | Width<br>a=b<br>mm | Radius<br>R<br>mm | kg<br>1pc |
| MDSR3 7510 15 HDG | 100                | 450               | 4.63      |
| MDSR3 7515 15 HDG | 150                | 450               | 4.82      |
| MDSR3 7520 15 HDG | 200                | 450               | 5.00      |
| MDSR3 7525 15 HDG | 250                | 450               | 5.18      |
| MDSR3 7530 15 HDG | 300                | 450               | 5.37      |
| MDSR3 7540 15 HDG | 400                | 450               | 5.73      |
| MDSR3 7545 15 HDG | 450                | 450               | 5.92      |
| MDSR3 7550 15 HDG | 500                | 450               | 6.10      |
| MDSR3 7560 15 HDG | 600                | 450               | 6.47      |
| MDSR3 7570 15 HDG | 700                | 450               | 6.84      |
| MDSR3 7575 15 HDG | 750                | 450               | 7.02      |
| MDSR3 7580 15 HDG | 800                | 450               | 7.20      |
| MDSR3 7590 15 HDG | 900                | 450               | 7.57      |
| MDSR3 7500 15 HDG | 1000               | 450               | 7.94      |
| MDSR3 7502 15 HDG | 1200               | 450               | 8.67      |

| MDSR3... H75      |                    | 2.0mm             |           |
|-------------------|--------------------|-------------------|-----------|
| CODE              | Width<br>a=b<br>mm | Radius<br>R<br>mm | kg<br>1pc |
| MDSR3 7510 20 HDG | 100                | 450               | 6.17      |
| MDSR3 7515 20 HDG | 150                | 450               | 6.42      |
| MDSR3 7520 20 HDG | 200                | 450               | 6.66      |
| MDSR3 7525 20 HDG | 250                | 450               | 6.91      |
| MDSR3 7530 20 HDG | 300                | 450               | 7.15      |
| MDSR3 7540 20 HDG | 400                | 450               | 7.94      |
| MDSR3 7545 20 HDG | 450                | 450               | 7.89      |
| MDSR3 7550 20 HDG | 500                | 450               | 8.13      |
| MDSR3 7560 20 HDG | 600                | 450               | 8.62      |
| MDSR3 7570 20 HDG | 700                | 450               | 9.11      |
| MDSR3 7575 20 HDG | 750                | 450               | 9.36      |
| MDSR3 7580 20 HDG | 800                | 450               | 9.60      |
| MDSR3 7590 20 HDG | 900                | 450               | 10.09     |
| MDSR3 7500 20 HDG | 1000               | 450               | 11.58     |
| MDSR3 7502 20 HDG | 1200               | 450               | 11.56     |

## Vertical 90° Outside Bend of Cable Ladder (stable) Radius:600

90° Dikey Merdiven Dış Bükey Elemanı-(Sabit) Radyus:600 - Арка фиксированная кабельроста, внешняя 90° радиус:600



### Hot-Dip Galvanized



Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8


| MDSR4... H75      |                    | 1.5mm             |           |
|-------------------|--------------------|-------------------|-----------|
| CODE              | Width<br>a=b<br>mm | Radius<br>R<br>mm | kg<br>1pc |
| MDSR4 7510 15 HDG | 100                | 600               | 5.80      |
| MDSR4 7515 15 HDG | 150                | 600               | 6.03      |
| MDSR4 7520 15 HDG | 200                | 600               | 6.26      |
| MDSR4 7525 15 HDG | 250                | 600               | 6.49      |
| MDSR4 7530 15 HDG | 300                | 600               | 6.72      |
| MDSR4 7540 15 HDG | 400                | 600               | 7.18      |
| MDSR4 7545 15 HDG | 450                | 600               | 7.41      |
| MDSR4 7550 15 HDG | 500                | 600               | 7.64      |
| MDSR4 7560 15 HDG | 600                | 600               | 8.10      |
| MDSR4 7570 15 HDG | 700                | 600               | 8.56      |
| MDSR4 7575 15 HDG | 750                | 600               | 8.79      |
| MDSR4 7580 15 HDG | 800                | 600               | 9.02      |
| MDSR4 7590 15 HDG | 900                | 600               | 9.48      |
| MDSR4 7500 15 HDG | 1000               | 600               | 9.94      |
| MDSR4 7502 15 HDG | 1200               | 600               | 10.86     |

| MDSR4... H75      |                    | 2.0mm             |           |
|-------------------|--------------------|-------------------|-----------|
| CODE              | Width<br>a=b<br>mm | Radius<br>R<br>mm | kg<br>1pc |
| MDSR4 7510 20 HDG | 100                | 600               | 7.74      |
| MDSR4 7515 20 HDG | 150                | 600               | 8.04      |
| MDSR4 7520 20 HDG | 200                | 600               | 8.35      |
| MDSR4 7525 20 HDG | 250                | 600               | 8.66      |
| MDSR4 7530 20 HDG | 300                | 600               | 8.96      |
| MDSR4 7540 20 HDG | 400                | 600               | 9.57      |
| MDSR4 7545 20 HDG | 450                | 600               | 9.88      |
| MDSR4 7550 20 HDG | 500                | 600               | 10.19     |
| MDSR4 7560 20 HDG | 600                | 600               | 10.80     |
| MDSR4 7570 20 HDG | 700                | 600               | 11.41     |
| MDSR4 7575 20 HDG | 750                | 600               | 11.72     |
| MDSR4 7580 20 HDG | 800                | 600               | 12.02     |
| MDSR4 7590 20 HDG | 900                | 600               | 12.64     |
| MDSR4 7500 20 HDG | 1000               | 600               | 13.25     |
| MDSR4 7502 20 HDG | 1200               | 600               | 14.47     |

### MDSR3 H75 HDG

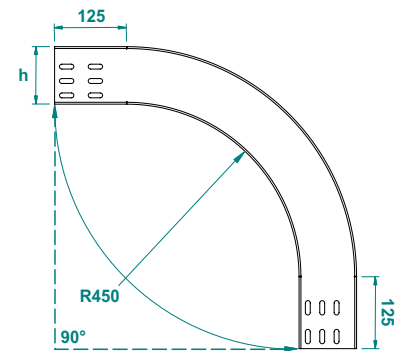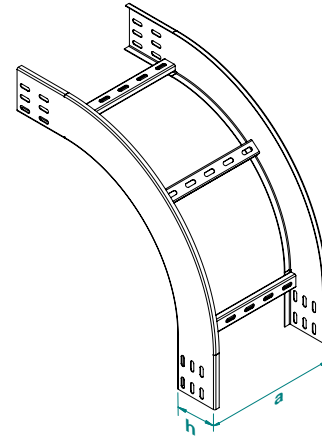

### MDSR3 H75 HDG

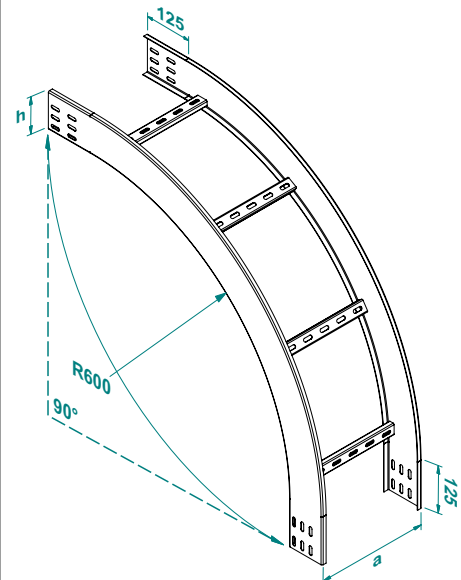

### APPLICATIONS

Cable routing

### MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method to TS-EN 10346:2011 (PG)  
SS- stainless steel AISI 304L and AISI 316L (SS)  
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0



# Cable Ladder Systems of Side Height 75



**MTK**  
MADE IN TURKEY

## Vertical 60° Outside Bend of Cable Ladder (stable)

60° Dikey Merdiven Dış Bükey Elemanı-(Sabit) - Арка фиксированная кабельроста, внешняя 60°



Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

### Hot-Dip Galvanized

| MDS60... H75      |                    | 1.5mm             |           |
|-------------------|--------------------|-------------------|-----------|
| CODE              | Width<br>a=b<br>mm | Radius<br>R<br>mm | kg<br>1pc |
| MDS60 7510 15 HDG | 100                | 150               | 1.61      |
| MDS60 7515 15 HDG | 150                | 150               | 1.73      |
| MDS60 7520 15 HDG | 200                | 150               | 1.85      |
| MDS60 7525 15 HDG | 250                | 150               | 1.98      |
| MDS60 7530 15 HDG | 300                | 150               | 2.10      |
| MDS60 7540 15 HDG | 400                | 150               | 2.35      |
| MDS60 7545 15 HDG | 450                | 150               | 2.47      |
| MDS60 7550 15 HDG | 500                | 150               | 2.60      |
| MDS60 7560 15 HDG | 600                | 150               | 2.84      |
| MDS60 7570 15 HDG | 700                | 150               | 3.09      |
| MDS60 7575 15 HDG | 750                | 150               | 3.21      |
| MDS60 7580 15 HDG | 800                | 150               | 3.34      |
| MDS60 7590 15 HDG | 900                | 150               | 3.58      |
| MDS60 7500 15 HDG | 1000               | 150               | 3.83      |
| MDS60 7502 15 HDG | 1200               | 150               | 4.33      |

| MDS60... H75      |                    | 2.0mm             |           |
|-------------------|--------------------|-------------------|-----------|
| CODE              | Width<br>a=b<br>mm | Radius<br>R<br>mm | kg<br>1pc |
| MDS60 7510 20 HDG | 100                | 150               | 2.14      |
| MDS60 7515 20 HDG | 150                | 150               | 2.31      |
| MDS60 7520 20 HDG | 200                | 150               | 2.47      |
| MDS60 7525 20 HDG | 250                | 150               | 2.63      |
| MDS60 7530 20 HDG | 300                | 150               | 2.80      |
| MDS60 7540 20 HDG | 400                | 150               | 3.13      |
| MDS60 7545 20 HDG | 450                | 150               | 3.29      |
| MDS60 7550 20 HDG | 500                | 150               | 3.46      |
| MDS60 7560 20 HDG | 600                | 150               | 3.79      |
| MDS60 7570 20 HDG | 700                | 150               | 4.12      |
| MDS60 7575 20 HDG | 750                | 150               | 4.28      |
| MDS60 7580 20 HDG | 800                | 150               | 4.45      |
| MDS60 7590 20 HDG | 900                | 150               | 4.78      |
| MDS60 7500 20 HDG | 1000               | 150               | 5.11      |
| MDS60 7502 20 HDG | 1200               | 150               | 5.77      |

## Vertical 60° Outside Bend of Cable Ladder (stable) Radius:300

60° Dikey Merdiven Dış Bükey Elemanı-(Sabit) Radyus:300 - Арка фиксированная кабельроста, внешняя 60° радиус:300



Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

### Hot-Dip Galvanized



| MDS60R2... H75      |                    | 1.5mm             |           |
|---------------------|--------------------|-------------------|-----------|
| CODE                | Width<br>a=b<br>mm | Radius<br>R<br>mm | kg<br>1pc |
| MDS60R2 7510 15 HDG | 100                | 300               | 3.19      |
| MDS60R2 7515 15 HDG | 150                | 300               | 3.33      |
| MDS60R2 7520 15 HDG | 200                | 300               | 3.47      |
| MDS60R2 7525 15 HDG | 250                | 300               | 3.60      |
| MDS60R2 7530 15 HDG | 300                | 300               | 3.74      |
| MDS60R2 7540 15 HDG | 400                | 300               | 4.02      |
| MDS60R2 7545 15 HDG | 450                | 300               | 4.15      |
| MDS60R2 7550 15 HDG | 500                | 300               | 4.29      |
| MDS60R2 7560 15 HDG | 600                | 300               | 4.57      |
| MDS60R2 7570 15 HDG | 700                | 300               | 4.84      |
| MDS60R2 7575 15 HDG | 750                | 300               | 4.98      |
| MDS60R2 7580 15 HDG | 800                | 300               | 5.12      |
| MDS60R2 7590 15 HDG | 900                | 300               | 5.39      |
| MDS60R2 7500 15 HDG | 1000               | 300               | 5.67      |
| MDS60R2 7502 15 HDG | 1200               | 300               | 6.22      |

| MDS60R2... H75      |                    | 2.0mm             |           |
|---------------------|--------------------|-------------------|-----------|
| CODE                | Width<br>a=b<br>mm | Radius<br>R<br>mm | kg<br>1pc |
| MDS60R2 7510 20 HDG | 100                | 300               | 3.77      |
| MDS60R2 7515 20 HDG | 150                | 300               | 3.96      |
| MDS60R2 7520 20 HDG | 200                | 300               | 4.14      |
| MDS60R2 7525 20 HDG | 250                | 300               | 4.32      |
| MDS60R2 7530 20 HDG | 300                | 300               | 4.51      |
| MDS60R2 7540 20 HDG | 400                | 300               | 4.87      |
| MDS60R2 7545 20 HDG | 450                | 300               | 5.06      |
| MDS60R2 7550 20 HDG | 500                | 300               | 5.24      |
| MDS60R2 7560 20 HDG | 600                | 300               | 5.61      |
| MDS60R2 7570 20 HDG | 700                | 300               | 5.98      |
| MDS60R2 7575 20 HDG | 750                | 300               | 6.16      |
| MDS60R2 7580 20 HDG | 800                | 300               | 6.34      |
| MDS60R2 7590 20 HDG | 900                | 300               | 6.71      |
| MDS60R2 7500 20 HDG | 1000               | 300               | 7.08      |
| MDS60R2 7502 20 HDG | 1200               | 300               | 7.81      |

### MDS60 H75 HDG

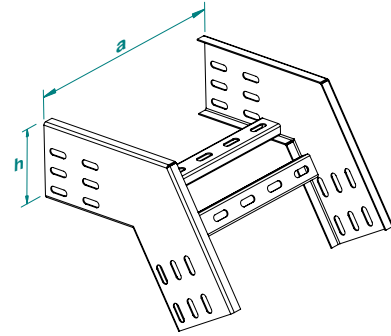

### MDS60R2 H75 HDG

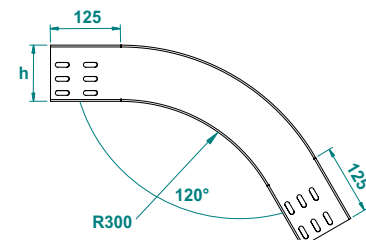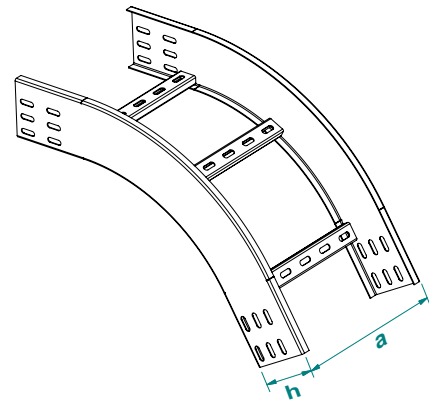

### APPLICATIONS

Cable routing

### MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method to TS-EN 10346:2011 (PG)  
SS- stainless steel AISI 304L and AISI 316L (SS)  
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0

# Cable Ladder Systems of Side Height 75



**MTK**  
MADE IN TURKEY

## Vertical 60° Outside Bend of Cable Ladder (stable) Radius:450

90° Dikey Merdiven Dış Bükey Elemanı-(Sabit) Radyus:450 - Арка фиксированная кабельроста, внешняя 90° радиус:450



Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized

| MDS60R3... H75      |                    | 1.5mm             |           |
|---------------------|--------------------|-------------------|-----------|
| CODE                | Width<br>a=b<br>mm | Radius<br>R<br>mm | kg<br>1pc |
| MDS60R3 7510 15 HDG | 100                | 450               | 3.52      |
| MDS60R3 7515 15 HDG | 150                | 450               | 3.66      |
| MDS60R3 7520 15 HDG | 200                | 450               | 3.80      |
| MDS60R3 7525 15 HDG | 250                | 450               | 3.93      |
| MDS60R3 7530 15 HDG | 300                | 450               | 4.07      |
| MDS60R3 7540 15 HDG | 400                | 450               | 4.35      |
| MDS60R3 7545 15 HDG | 450                | 450               | 4.48      |
| MDS60R3 7550 15 HDG | 500                | 450               | 4.62      |
| MDS60R3 7560 15 HDG | 600                | 450               | 4.90      |
| MDS60R3 7570 15 HDG | 700                | 450               | 5.17      |
| MDS60R2 7575 15 HDG | 750                | 450               | 5.31      |
| MDS60R2 7580 15 HDG | 800                | 450               | 5.45      |
| MDS60R2 7590 15 HDG | 900                | 450               | 5.72      |
| MDS60R2 7500 15 HDG | 1000               | 450               | 6.00      |
| MDS60R2 7502 15 HDG | 1200               | 450               | 6.55      |

| MDS60R3... H75      |                    | 2.0mm             |           |
|---------------------|--------------------|-------------------|-----------|
| CODE                | Width<br>a=b<br>mm | Radius<br>R<br>mm | kg<br>1pc |
| MDS60R3 7510 20 HDG | 100                | 450               | 4.69      |
| MDS60R3 7515 20 HDG | 150                | 450               | 4.88      |
| MDS60R3 7520 20 HDG | 200                | 450               | 5.06      |
| MDS60R3 7525 20 HDG | 250                | 450               | 5.24      |
| MDS60R3 7530 20 HDG | 300                | 450               | 5.43      |
| MDS60R3 7540 20 HDG | 400                | 450               | 5.79      |
| MDS60R3 7545 20 HDG | 450                | 450               | 5.98      |
| MDS60R3 7550 20 HDG | 500                | 450               | 6.16      |
| MDS60R3 7560 20 HDG | 600                | 450               | 6.53      |
| MDS60R3 7570 20 HDG | 700                | 450               | 6.90      |
| MDS60R3 7575 20 HDG | 750                | 450               | 7.08      |
| MDS60R3 7580 20 HDG | 800                | 450               | 7.26      |
| MDS60R3 7590 20 HDG | 900                | 450               | 7.63      |
| MDS60R3 7510 20 HDG | 1000               | 450               | 8.00      |
| MDS60R3 7502 20 HDG | 1200               | 450               | 8.73      |

## Vertical 60° Outside Bend of Cable Ladder (stable) Radius:600

60° Dikey Merdiven Dış Bükey Elemanı-(Sabit) Radyus:600 - Арка фиксированная кабельроста, внешняя 90° радиус:600



Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized


| MDS60R4... H75      |                    | 1.5mm             |           |
|---------------------|--------------------|-------------------|-----------|
| CODE                | Width<br>a=b<br>mm | Radius<br>R<br>mm | kg<br>1pc |
| MDS60R4 7510 15 HDG | 100                | 600               | 4.54      |
| MDS60R4 7515 15 HDG | 150                | 600               | 4.64      |
| MDS60R4 7520 15 HDG | 200                | 600               | 4.82      |
| MDS60R4 7525 15 HDG | 250                | 600               | 5.00      |
| MDS60R4 7530 15 HDG | 300                | 600               | 5.19      |
| MDS60R4 7540 15 HDG | 400                | 600               | 5.55      |
| MDS60R4 7545 15 HDG | 450                | 600               | 5.74      |
| MDS60R4 7550 15 HDG | 500                | 600               | 5.92      |
| MDS60R4 7560 15 HDG | 600                | 600               | 6.29      |
| MDS60R4 7570 15 HDG | 700                | 600               | 6.66      |
| MDS60R4 7575 15 HDG | 750                | 600               | 6.84      |
| MDS60R4 7580 15 HDG | 800                | 600               | 7.02      |
| MDS60R4 7590 15 HDG | 900                | 600               | 7.39      |
| MDS60R4 7500 15 HDG | 1000               | 600               | 7.76      |
| MDS60R4 7502 15 HDG | 1200               | 600               | 8.49      |

| MDS60R4... H75      |                    | 2.0mm             |           |
|---------------------|--------------------|-------------------|-----------|
| CODE                | Width<br>a=b<br>mm | Radius<br>R<br>mm | kg<br>1pc |
| MDS60R4 7510 20 HDG | 100                | 600               | 5.93      |
| MDS60R4 7515 20 HDG | 150                | 600               | 6.18      |
| MDS60R4 7520 20 HDG | 200                | 600               | 6.42      |
| MDS60R4 7525 20 HDG | 250                | 600               | 6.67      |
| MDS60R4 7530 20 HDG | 300                | 600               | 6.91      |
| MDS60R4 7540 20 HDG | 400                | 600               | 7.40      |
| MDS60R4 7545 20 HDG | 450                | 600               | 7.65      |
| MDS60R4 7550 20 HDG | 500                | 600               | 7.89      |
| MDS60R4 7560 20 HDG | 600                | 600               | 8.38      |
| MDS60R4 7570 20 HDG | 700                | 600               | 8.87      |
| MDS60R4 7575 20 HDG | 750                | 600               | 9.12      |
| MDS60R4 7580 20 HDG | 800                | 600               | 9.36      |
| MDS60R4 7590 20 HDG | 900                | 600               | 9.85      |
| MDS60R4 7500 20 HDG | 1000               | 600               | 10.34     |
| MDS60R4 7502 20 HDG | 1200               | 600               | 11.32     |

### MDS60R3 H75 HDG

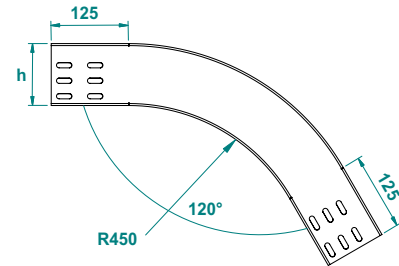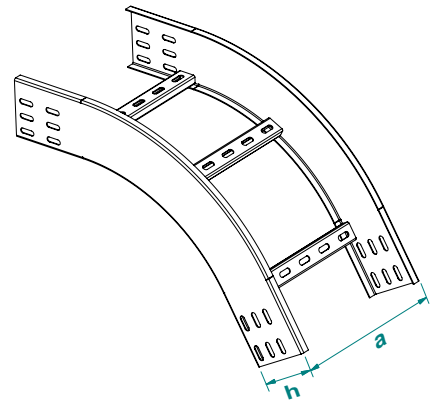

### MDS60R4 H75 HDG

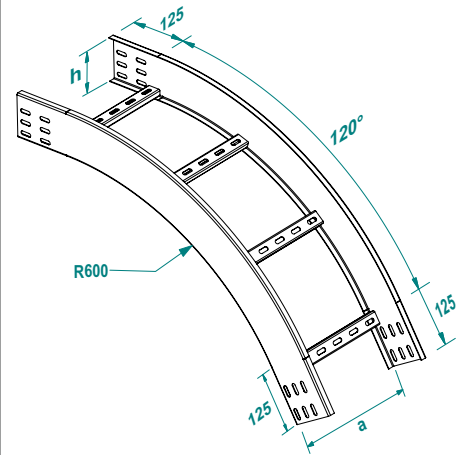

### APPLICATIONS

Cable routing

### MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method to TS-EN 10346:2011 (PG)  
SS- stainless steel AISI 304L and AISI 316L (SS)  
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0


# Cable Ladder Systems of Side Height 75



**MTK**  
MADE IN TURKEY

## Vertical 45° Outside Bend of Cable Ladder (stable)

45° Dikey Merdiven Dış Bükey Elemanı-(Sabit) - Арка фиксированная кабельроста, внешняя 45°

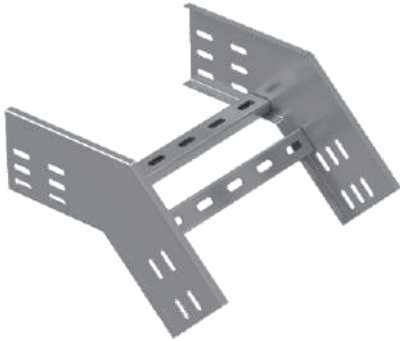

Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8


### Hot-Dip Galvanized

| MDS45... H75      |                    | 1.5mm             |           |     |  |
|-------------------|--------------------|-------------------|-----------|-----|--|
| CODE              | Width<br>a=b<br>mm | Radius<br>R<br>mm | kg<br>1pc | pcs |  |
| MDS45 7510 15 HDG | 100                | 150               | 0.98      | 1   |  |
| MDS45 7515 15 HDG | 150                | 150               | 1.06      | 1   |  |
| MDS45 7520 15 HDG | 200                | 150               | 1.15      | 1   |  |
| MDS45 7525 15 HDG | 250                | 150               | 1.23      | 1   |  |
| MDS45 7530 15 HDG | 300                | 150               | 1.31      | 1   |  |
| MDS45 7540 15 HDG | 400                | 150               | 1.48      | 1   |  |
| MDS45 7545 15 HDG | 450                | 150               | 1.56      | 1   |  |
| MDS45 7550 15 HDG | 500                | 150               | 1.64      | 1   |  |
| MDS45 7560 15 HDG | 600                | 150               | 1.81      | 1   |  |
| MDS45 7570 15 HDG | 700                | 150               | 1.97      | 1   |  |
| MDS45 7575 15 HDG | 750                | 150               | 2.05      | 1   |  |
| MDS45 7580 15 HDG | 800                | 150               | 2.14      | 1   |  |
| MDS45 7590 15 HDG | 900                | 150               | 2.30      | 1   |  |
| MDS45 7500 15 HDG | 1000               | 150               | 2.47      | 1   |  |
| MDS45 7502 15 HDG | 1200               | 150               | 2.80      | 1   |  |

| MDS45... H75      |                    | 2.0mm             |           |     |  |
|-------------------|--------------------|-------------------|-----------|-----|--|
| CODE              | Width<br>a=b<br>mm | Radius<br>R<br>mm | kg<br>1pc | pcs |  |
| MDS45 7510 20 HDG | 100                | 150               | 1.31      | 1   |  |
| MDS45 7515 20 HDG | 150                | 150               | 1.42      | 1   |  |
| MDS45 7520 20 HDG | 200                | 150               | 1.53      | 1   |  |
| MDS45 7525 20 HDG | 250                | 150               | 1.64      | 1   |  |
| MDS45 7530 20 HDG | 300                | 150               | 1.75      | 1   |  |
| MDS45 7540 20 HDG | 400                | 150               | 1.97      | 1   |  |
| MDS45 7545 20 HDG | 450                | 150               | 2.08      | 1   |  |
| MDS45 7550 20 HDG | 500                | 150               | 2.19      | 1   |  |
| MDS45 7560 20 HDG | 600                | 150               | 2.41      | 1   |  |
| MDS45 7570 20 HDG | 700                | 150               | 2.63      | 1   |  |
| MDS45 7575 20 HDG | 750                | 150               | 2.74      | 1   |  |
| MDS45 7580 20 HDG | 800                | 150               | 2.85      | 1   |  |
| MDS45 7590 20 HDG | 900                | 150               | 3.07      | 1   |  |
| MDS45 7500 20 HDG | 1000               | 150               | 3.29      | 1   |  |
| MDS45 7502 20 HDG | 1200               | 150               | 3.73      | 1   |  |

## Vertical 45° Outside Bend of Cable Ladder (stable) Radius:300

45° Dikey Merdiven Dış Bükey Elemanı-(Sabit) Radyus:300 - Арка фиксированная кабельроста, внешняя 45° радиус:300

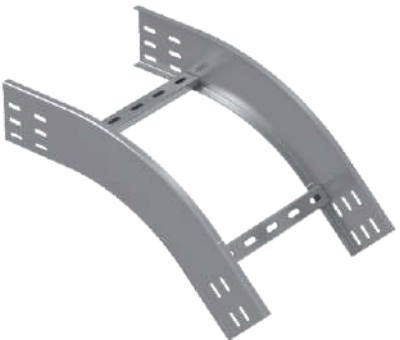

Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

### Hot-Dip Galvanized



| MDS45R2... H75      |                    | 1.5mm             |           |     |  |
|---------------------|--------------------|-------------------|-----------|-----|--|
| CODE                | Width<br>a=b<br>mm | Radius<br>R<br>mm | kg<br>1pc | pcs |  |
| MDS45R2 7510 15 HDG | 100                | 300               | 1.39      | 1   |  |
| MDS45R2 7515 15 HDG | 150                | 300               | 2.08      | 1   |  |
| MDS45R2 7520 15 HDG | 200                | 300               | 2.17      | 1   |  |
| MDS45R2 7525 15 HDG | 250                | 300               | 2.26      | 1   |  |
| MDS45R2 7530 15 HDG | 300                | 300               | 2.36      | 1   |  |
| MDS45R2 7540 15 HDG | 400                | 300               | 2.54      | 1   |  |
| MDS45R2 7545 15 HDG | 450                | 300               | 2.63      | 1   |  |
| MDS45R2 7550 15 HDG | 500                | 300               | 2.72      | 1   |  |
| MDS45R2 7560 15 HDG | 600                | 300               | 2.91      | 1   |  |
| MDS45R2 7570 15 HDG | 700                | 300               | 3.09      | 1   |  |
| MDS45R2 7575 15 HDG | 750                | 300               | 3.18      | 1   |  |
| MDS45R2 7580 15 HDG | 800                | 300               | 3.27      | 1   |  |
| MDS45R2 7590 15 HDG | 900                | 300               | 3.46      | 1   |  |
| MDS45R2 7500 15 HDG | 1000               | 300               | 3.64      | 1   |  |
| MDS45R2 7502 15 HDG | 1200               | 300               | 4.01      | 1   |  |

| MDS45R2... H75      |                    | 2.0mm             |           |     |  |
|---------------------|--------------------|-------------------|-----------|-----|--|
| CODE                | Width<br>a=b<br>mm | Radius<br>R<br>mm | kg<br>1pc | pcs |  |
| MDS45R2 7510 20 HDG | 100                | 300               | 2.65      | 1   |  |
| MDS45R2 7515 20 HDG | 150                | 300               | 2.77      | 1   |  |
| MDS45R2 7520 20 HDG | 200                | 300               | 2.89      | 1   |  |
| MDS45R2 7525 20 HDG | 250                | 300               | 3.02      | 1   |  |
| MDS45R2 7530 20 HDG | 300                | 300               | 3.14      | 1   |  |
| MDS45R2 7540 20 HDG | 400                | 300               | 3.38      | 1   |  |
| MDS45R2 7545 20 HDG | 450                | 300               | 3.51      | 1   |  |
| MDS45R2 7550 20 HDG | 500                | 300               | 3.63      | 1   |  |
| MDS45R2 7560 20 HDG | 600                | 300               | 3.87      | 1   |  |
| MDS45R2 7570 20 HDG | 700                | 300               | 4.12      | 1   |  |
| MDS45R2 7575 20 HDG | 750                | 300               | 4.24      | 1   |  |
| MDS45R2 7580 20 HDG | 800                | 300               | 4.36      | 1   |  |
| MDS45R2 7590 20 HDG | 900                | 300               | 4.61      | 1   |  |
| MDS45R2 7500 20 HDG | 1000               | 300               | 4.85      | 1   |  |
| MDS45R2 7502 20 HDG | 1200               | 300               | 5.34      | 1   |  |

### MDS45 H75 HDG

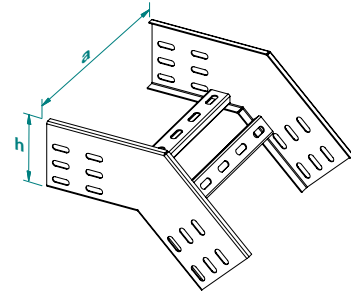

### MDS45R2 H75 HDG

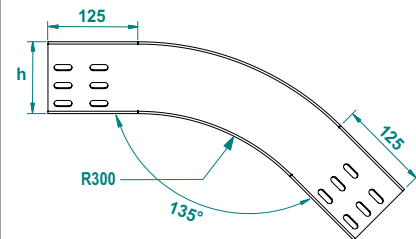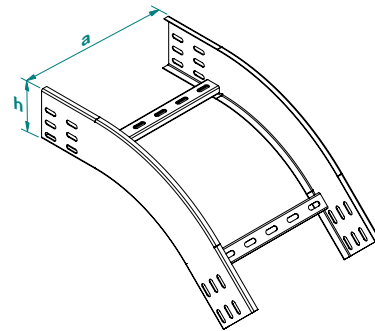

### APPLICATIONS

Cable routing

### MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method  
to TS-EN 10346:2011 (PG)  
SS- stainless steel AISI 304L and AISI 316L (SS)  
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0


# Cable Ladder Systems of Side Height 75



**MTK**  
MADE IN TURKEY

## Vertical 45° Outside Bend of Cable Ladder (stable) Radius:450

45° Dikey Merdiven Dış Bükey Elemanı-(Sabit) -45° Dikey Merdiven Dış Bükey Elemanı-(Sabit) Radyus:450

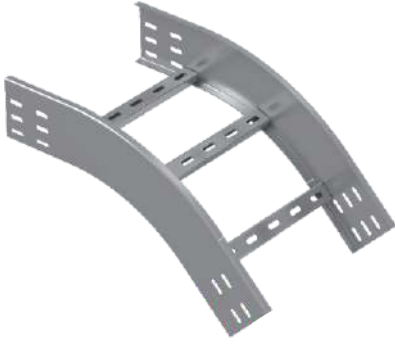

Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

### Hot-Dip Galvanized

| MDS45R3... H75      |                    | 1.5mm             |           |     |
|---------------------|--------------------|-------------------|-----------|-----|
| CODE                | Width<br>a=b<br>mm | Radius<br>R<br>mm | kg<br>1pc | pcs |
| MDS45R3 7510 15 HDG | 100                | 450               | 2.50      | 1   |
| MDS45R3 7515 15 HDG | 150                | 450               | 2.64      | 1   |
| MDS45R3 7520 15 HDG | 200                | 450               | 2.78      | 1   |
| MDS45R3 7525 15 HDG | 250                | 450               | 2.91      | 1   |
| MDS45R3 7530 15 HDG | 300                | 450               | 3.05      | 1   |
| MDS45R3 7540 15 HDG | 400                | 450               | 3.33      | 1   |
| MDS45R3 7545 15 HDG | 450                | 450               | 3.46      | 1   |
| MDS45R3 7550 15 HDG | 500                | 450               | 3.60      | 1   |
| MDS45R3 7560 15 HDG | 600                | 450               | 3.88      | 1   |
| MDS45R3 7570 15 HDG | 700                | 450               | 4.15      | 1   |
| MDS45R3 7575 15 HDG | 750                | 450               | 4.29      | 1   |
| MDS45R3 7580 15 HDG | 800                | 450               | 4.43      | 1   |
| MDS45R3 7590 15 HDG | 900                | 450               | 4.70      | 1   |
| MDS45R3 7500 15 HDG | 1000               | 450               | 4.98      | 1   |
| MDS45R3 7502 15 HDG | 1200               | 450               | 5.53      | 1   |

| MDS45R3... H75      |                    | 2.0mm             |           |     |
|---------------------|--------------------|-------------------|-----------|-----|
| CODE                | Width<br>a=b<br>mm | Radius<br>R<br>mm | kg<br>1pc | pcs |
| MDS45R3 7510 20 HDG | 100                | 450               | 3.33      | 1   |
| MDS45R3 7515 20 HDG | 150                | 450               | 3.52      | 1   |
| MDS45R3 7520 20 HDG | 200                | 450               | 3.70      | 1   |
| MDS45R3 7525 20 HDG | 250                | 450               | 3.88      | 1   |
| MDS45R3 7530 20 HDG | 300                | 450               | 4.07      | 1   |
| MDS45R3 7540 20 HDG | 400                | 450               | 4.43      | 1   |
| MDS45R3 7545 20 HDG | 450                | 450               | 4.62      | 1   |
| MDS45R3 7550 20 HDG | 500                | 450               | 4.80      | 1   |
| MDS45R3 7560 20 HDG | 600                | 450               | 5.17      | 1   |
| MDS45R3 7570 20 HDG | 700                | 450               | 5.54      | 1   |
| MDS45R3 7575 20 HDG | 750                | 450               | 5.72      | 1   |
| MDS45R3 7580 20 HDG | 800                | 450               | 5.90      | 1   |
| MDS45R3 7590 20 HDG | 900                | 450               | 6.27      | 1   |
| MDS45R3 7500 20 HDG | 1000               | 450               | 6.64      | 1   |
| MDS45R3 7502 20 HDG | 1200               | 450               | 7.37      | 1   |

## Vertical 45° Outside Bend of Cable Ladder (stable) Radius:600

45° Dikey Merdiven Dış Bükey Elemanı-(Sabit) Radyus:600 - Арка фиксированная кабельроста, внешняя 45° радиус:600



Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

### Hot-Dip Galvanized



| MDS45R4... H75      |                    | 1.5mm             |           |     |
|---------------------|--------------------|-------------------|-----------|-----|
| CODE                | Width<br>a=b<br>mm | Radius<br>R<br>mm | kg<br>1pc | pcs |
| MDS45R4 7510 15 HDG | 100                | 600               | 3.10      | 1   |
| MDS45R4 7515 15 HDG | 150                | 600               | 3.24      | 1   |
| MDS45R4 7520 15 HDG | 200                | 600               | 3.38      | 1   |
| MDS45R4 7525 15 HDG | 250                | 600               | 3.51      | 1   |
| MDS45R4 7530 15 HDG | 300                | 600               | 3.65      | 1   |
| MDS45R4 7540 15 HDG | 400                | 600               | 3.93      | 1   |
| MDS45R4 7545 15 HDG | 450                | 600               | 4.06      | 1   |
| MDS45R4 7550 15 HDG | 500                | 600               | 4.20      | 1   |
| MDS45R4 7560 15 HDG | 600                | 600               | 4.48      | 1   |
| MDS45R4 7570 15 HDG | 700                | 600               | 4.75      | 1   |
| MDS45R4 7575 15 HDG | 750                | 600               | 4.89      | 1   |
| MDS45R4 7580 15 HDG | 800                | 600               | 5.03      | 1   |
| MDS45R4 7590 15 HDG | 900                | 600               | 5.30      | 1   |
| MDS45R4 7500 15 HDG | 1000               | 600               | 5.58      | 1   |
| MDS45R4 7502 15 HDG | 1200               | 600               | 6.13      | 1   |

| MDS45R4... H75      |                    | 2.0mm             |           |     |
|---------------------|--------------------|-------------------|-----------|-----|
| CODE                | Width<br>a=b<br>mm | Radius<br>R<br>mm | kg<br>1pc | pcs |
| MDS45R4 7510 20 HDG | 100                | 600               | 3.10      | 1   |
| MDS45R4 7515 20 HDG | 150                | 600               | 4.32      | 1   |
| MDS45R4 7520 20 HDG | 200                | 600               | 4.50      | 1   |
| MDS45R4 7525 20 HDG | 250                | 600               | 4.68      | 1   |
| MDS45R4 7530 20 HDG | 300                | 600               | 4.87      | 1   |
| MDS45R4 7540 20 HDG | 400                | 600               | 5.23      | 1   |
| MDS45R4 7545 20 HDG | 450                | 600               | 5.42      | 1   |
| MDS45R4 7550 20 HDG | 500                | 600               | 5.60      | 1   |
| MDS45R4 7560 20 HDG | 600                | 600               | 5.97      | 1   |
| MDS45R4 7570 20 HDG | 700                | 600               | 6.34      | 1   |
| MDS45R4 7575 20 HDG | 750                | 600               | 6.52      | 1   |
| MDS45R4 7580 20 HDG | 800                | 600               | 6.70      | 1   |
| MDS45R4 7590 20 HDG | 900                | 600               | 7.07      | 1   |
| MDS45R4 7500 20 HDG | 1000               | 600               | 7.44      | 1   |
| MDS45R4 7502 20 HDG | 1200               | 600               | 8.17      | 1   |

### MDS45R3 H75 HDG

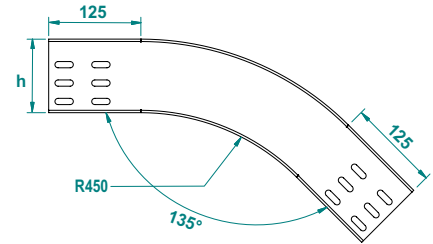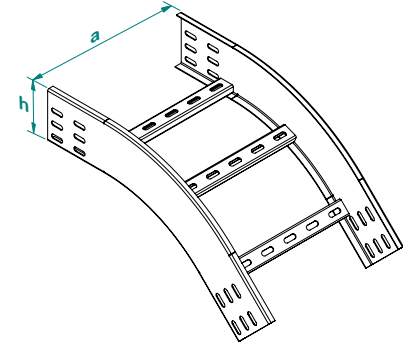

### MDS45R4 H75 HDG

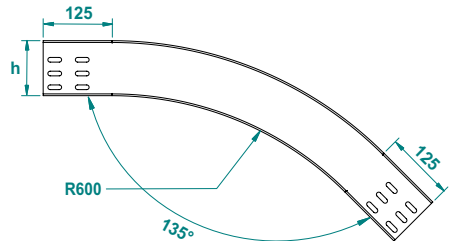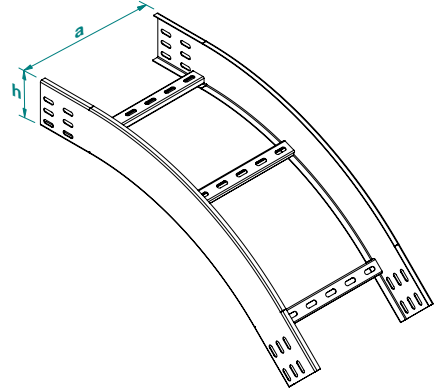

### APPLICATIONS

Cable routing

### MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method

to TS-EN 10346:2011 (PG)

SS- stainless steel AISI 304L and AISI 316L (SS)

EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0


# Cable Ladder Systems of Side Height 75



**MTK**  
MADE IN TURKEY

## Vertical 30° Outside Bend of Cable Ladder (stable)

30° Dikey Merdiven Dış Bükey Elemanı-(Sabit) - Арка фиксированная кабельроста, внешняя 30°

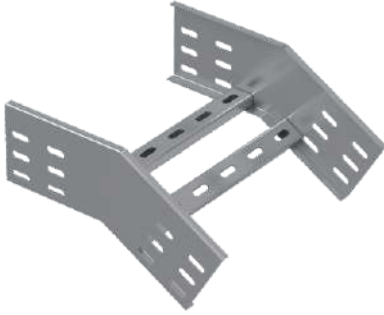

Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8


### Hot-Dip Galvanized

| MDS30... H75      |                    | 1.5mm             |           |     |  |
|-------------------|--------------------|-------------------|-----------|-----|--|
| CODE              | Width<br>a=b<br>mm | Radius<br>R<br>mm | kg<br>1pc | pcs |  |
| MDS30 7510 15 HDG | 100                | 150               | 0.98      | 1   |  |
| MDS30 7515 15 HDG | 150                | 150               | 1.06      | 1   |  |
| MDS30 7520 15 HDG | 200                | 150               | 1.15      | 1   |  |
| MDS30 7525 15 HDG | 250                | 150               | 1.23      | 1   |  |
| MDS30 7530 15 HDG | 300                | 150               | 1.31      | 1   |  |
| MDS30 7540 15 HDG | 400                | 150               | 1.48      | 1   |  |
| MDS30 7545 15 HDG | 450                | 150               | 1.56      | 1   |  |
| MDS30 7550 15 HDG | 500                | 150               | 1.64      | 1   |  |
| MDS30 7560 15 HDG | 600                | 150               | 1.81      | 1   |  |
| MDS30 7570 15 HDG | 700                | 150               | 1.97      | 1   |  |
| MDS30 7575 15 HDG | 750                | 150               | 2.05      | 1   |  |
| MDS30 7580 15 HDG | 800                | 150               | 2.14      | 1   |  |
| MDS30 7590 15 HDG | 900                | 150               | 2.30      | 1   |  |
| MDS30 7500 15 HDG | 1000               | 150               | 2.47      | 1   |  |
| MDS30 7502 15 HDG | 1200               | 150               | 2.80      | 1   |  |

| MDS30... H75      |                    | 2.0mm             |           |     |  |
|-------------------|--------------------|-------------------|-----------|-----|--|
| CODE              | Width<br>a=b<br>mm | Radius<br>R<br>mm | kg<br>1pc | pcs |  |
| MDS30 7510 20 HDG | 100                | 150               | 1.31      | 1   |  |
| MDS30 7515 20 HDG | 150                | 150               | 1.42      | 1   |  |
| MDS30 7520 20 HDG | 200                | 150               | 1.53      | 1   |  |
| MDS30 7525 20 HDG | 250                | 150               | 1.64      | 1   |  |
| MDS30 7530 20 HDG | 300                | 150               | 1.75      | 1   |  |
| MDS30 7540 20 HDG | 400                | 150               | 1.97      | 1   |  |
| MDS30 7545 20 HDG | 450                | 150               | 2.08      | 1   |  |
| MDS30 7550 20 HDG | 500                | 150               | 2.19      | 1   |  |
| MDS30 7560 20 HDG | 600                | 150               | 2.41      | 1   |  |
| MDS30 7570 20 HDG | 700                | 150               | 2.63      | 1   |  |
| MDS30 7575 20 HDG | 750                | 150               | 2.74      | 1   |  |
| MDS30 7580 20 HDG | 800                | 150               | 2.85      | 1   |  |
| MDS30 7590 20 HDG | 900                | 150               | 3.07      | 1   |  |
| MDS30 7500 20 HDG | 1000               | 150               | 3.29      | 1   |  |
| MDS30 7502 20 HDG | 1200               | 150               | 3.73      | 1   |  |

## Vertical 30° Outside Bend of Cable Ladder (stable) Radius:300

30° Dikey Merdiven Dış Bükey Elemanı-(Sabit) Radyus:300 - Арка фиксированная кабельроста, внешняя 30° радиус:300

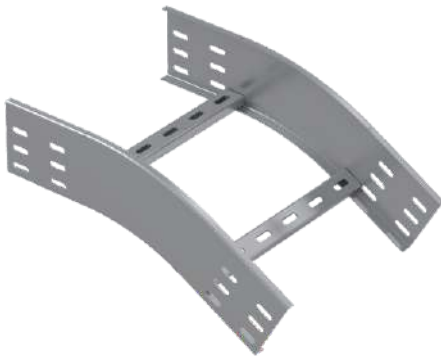

Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

### Hot-Dip Galvanized



| MDS30R2... H75      |                    | 1.5mm             |           |     |  |
|---------------------|--------------------|-------------------|-----------|-----|--|
| CODE                | Width<br>a=b<br>mm | Radius<br>R<br>mm | kg<br>1pc | pcs |  |
| MDS30R2 7510 15 HDG | 100                | 300               | 1.24      | 1   |  |
| MDS30R2 7515 15 HDG | 150                | 300               | 1.33      | 1   |  |
| MDS30R2 7520 15 HDG | 200                | 300               | 1.42      | 1   |  |
| MDS30R2 7525 15 HDG | 250                | 300               | 1.51      | 1   |  |
| MDS30R2 7530 15 HDG | 300                | 300               | 1.61      | 1   |  |
| MDS30R2 7540 15 HDG | 400                | 300               | 1.79      | 1   |  |
| MDS30R2 7545 15 HDG | 450                | 300               | 1.88      | 1   |  |
| MDS30R2 7550 15 HDG | 500                | 300               | 1.97      | 1   |  |
| MDS30R2 7560 15 HDG | 600                | 300               | 2.16      | 1   |  |
| MDS30R2 7570 15 HDG | 700                | 300               | 2.34      | 1   |  |
| MDS30R2 7575 15 HDG | 750                | 300               | 2.43      | 1   |  |
| MDS30R2 7580 15 HDG | 800                | 300               | 2.52      | 1   |  |
| MDS30R2 7590 15 HDG | 900                | 300               | 2.71      | 1   |  |
| MDS30R2 7500 15 HDG | 1000               | 300               | 2.89      | 1   |  |
| MDS30R2 7502 15 HDG | 1200               | 300               | 3.26      | 1   |  |

| MDS30R2... H75      |                    | 2.0mm             |           |     |  |
|---------------------|--------------------|-------------------|-----------|-----|--|
| CODE                | Width<br>a=b<br>mm | Radius<br>R<br>mm | kg<br>1pc | pcs |  |
| MDS30R2 7510 20 HDG | 100                | 300               | 1.65      | 1   |  |
| MDS30R2 7515 20 HDG | 150                | 300               | 1.77      | 1   |  |
| MDS30R2 7520 20 HDG | 200                | 300               | 1.89      | 1   |  |
| MDS30R2 7525 20 HDG | 250                | 300               | 2.02      | 1   |  |
| MDS30R2 7530 20 HDG | 300                | 300               | 2.14      | 1   |  |
| MDS30R2 7540 20 HDG | 400                | 300               | 2.38      | 1   |  |
| MDS30R2 7545 20 HDG | 450                | 300               | 2.51      | 1   |  |
| MDS30R2 7550 20 HDG | 500                | 300               | 2.63      | 1   |  |
| MDS30R2 7560 20 HDG | 600                | 300               | 2.87      | 1   |  |
| MDS30R2 7570 20 HDG | 700                | 300               | 3.12      | 1   |  |
| MDS30R2 7575 20 HDG | 750                | 300               | 3.24      | 1   |  |
| MDS30R2 7580 20 HDG | 800                | 300               | 3.36      | 1   |  |
| MDS30R2 7590 20 HDG | 900                | 300               | 3.61      | 1   |  |
| MDS30R2 7500 20 HDG | 1000               | 300               | 3.85      | 1   |  |
| MDS30R2 7502 20 HDG | 1200               | 300               | 4.34      | 1   |  |

### MDS30 H75 HDG

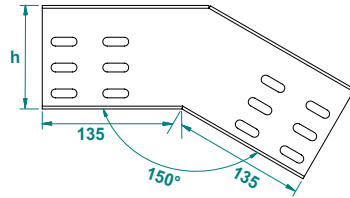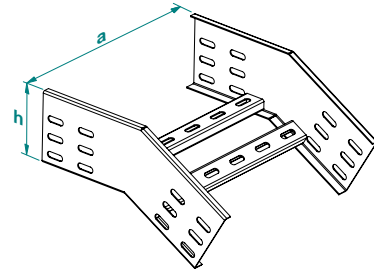

### MDS30R2 H75 HDG

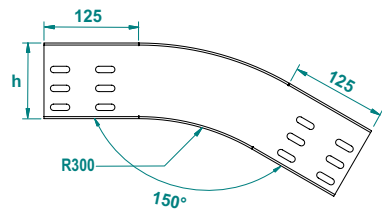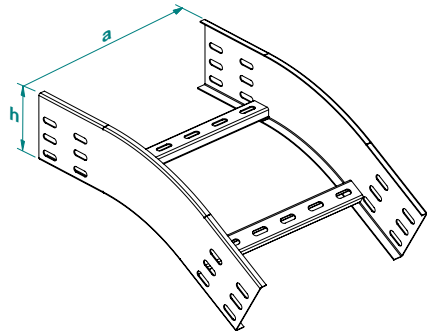

### APPLICATIONS

Cable routing

### MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method  
to TS-EN 10346:2011 (PG)  
SS- stainless steel AISI 304L and AISI 316L (SS)  
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: **1.5 2.0**



# Cable Ladder Systems of Side Height 75



**MTK**  
MADE IN TURKEY

## Vertical 30° Outside Bend of Cable Ladder (stable) Radius:450

30° Dikey Merdiven Dış Bükey Elemanı-(Sabit) Radyus:450 - Арка фиксированная кабельроста, внешняя 30° радиус:450



Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

### Hot-Dip Galvanized

| MDS30R3... H75      |                    | 1.5mm             |           |
|---------------------|--------------------|-------------------|-----------|
| CODE                | Width<br>a=b<br>mm | Radius<br>R<br>mm | kg<br>1pc |
| MDS30R3 7510 15 HDG | 100                | 450               | 1.39      |
| MDS30R3 7515 15 HDG | 150                | 450               | 1.48      |
| MDS30R3 7520 15 HDG | 200                | 450               | 1.57      |
| MDS30R3 7525 15 HDG | 250                | 450               | 1.66      |
| MDS30R3 7530 15 HDG | 300                | 450               | 1.76      |
| MDS30R3 7540 15 HDG | 400                | 450               | 1.94      |
| MDS30R3 7545 15 HDG | 450                | 450               | 2.03      |
| MDS30R3 7550 15 HDG | 500                | 450               | 2.12      |
| MDS30R3 7560 15 HDG | 600                | 450               | 2.31      |
| MDS30R3 7570 15 HDG | 700                | 450               | 2.49      |
| MDS30R3 7575 15 HDG | 750                | 450               | 2.58      |
| MDS30R3 7580 15 HDG | 800                | 450               | 2.67      |
| MDS30R3 7590 15 HDG | 900                | 450               | 2.86      |
| MDS30R3 7500 15 HDG | 1000               | 450               | 3.04      |
| MDS30R3 7502 15 HDG | 1200               | 450               | 3.41      |

| MDS30R3... H75      |                    | 2.0mm             |           |
|---------------------|--------------------|-------------------|-----------|
| CODE                | Width<br>a=b<br>mm | Radius<br>R<br>mm | kg<br>1pc |
| MDS30R3 7510 20 HDG | 100                | 450               | 1.85      |
| MDS30R3 7515 20 HDG | 150                | 450               | 1.97      |
| MDS30R3 7520 20 HDG | 200                | 450               | 2.09      |
| MDS30R3 7525 20 HDG | 250                | 450               | 2.22      |
| MDS30R3 7530 20 HDG | 300                | 450               | 2.34      |
| MDS30R3 7540 20 HDG | 400                | 450               | 2.58      |
| MDS30R3 7545 20 HDG | 450                | 450               | 2.71      |
| MDS30R3 7550 20 HDG | 500                | 450               | 2.83      |
| MDS30R3 7560 20 HDG | 600                | 450               | 3.07      |
| MDS30R3 7570 20 HDG | 700                | 450               | 3.32      |
| MDS30R3 7575 20 HDG | 750                | 450               | 3.44      |
| MDS30R3 7580 20 HDG | 800                | 450               | 3.56      |
| MDS30R3 7590 20 HDG | 900                | 450               | 3.81      |
| MDS30R3 7500 20 HDG | 1000               | 450               | 4.05      |
| MDS30R3 7502 20 HDG | 1200               | 450               | 4.54      |

## Vertical 30° Outside Bend of Cable Ladder (stable) Radius:600

30° Dikey Merdiven Dış Bükey Elemanı-(Sabit) Radyus:600 - Арка фиксированная кабельроста, внешняя 30° радиус:600



Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

### Hot-Dip Galvanized



| MDS30R4... H75      |                    | 1.5mm             |           |
|---------------------|--------------------|-------------------|-----------|
| CODE                | Width<br>a=b<br>mm | Radius<br>R<br>mm | kg<br>1pc |
| MDS30R4 7510 15 HDG | 100                | 600               | 1.84      |
| MDS30R4 7515 15 HDG | 150                | 600               | 1.98      |
| MDS30R4 7520 15 HDG | 200                | 600               | 2.12      |
| MDS30R4 7525 15 HDG | 250                | 600               | 2.25      |
| MDS30R4 7530 15 HDG | 300                | 600               | 2.39      |
| MDS30R4 7540 15 HDG | 400                | 600               | 2.67      |
| MDS30R4 7545 15 HDG | 450                | 600               | 2.80      |
| MDS30R4 7550 15 HDG | 500                | 600               | 2.94      |
| MDS30R4 7560 15 HDG | 600                | 600               | 3.22      |
| MDS30R4 7570 15 HDG | 700                | 600               | 3.49      |
| MDS30R4 7575 15 HDG | 750                | 600               | 3.63      |
| MDS30R4 7580 15 HDG | 800                | 600               | 3.77      |
| MDS30R4 7590 15 HDG | 900                | 600               | 4.04      |
| MDS30R4 7500 15 HDG | 1000               | 600               | 4.32      |
| MDS30R4 7502 15 HDG | 1200               | 600               | 4.87      |

| MDS30R4... H75      |                    | 2.0mm             |           |
|---------------------|--------------------|-------------------|-----------|
| CODE                | Width<br>a=b<br>mm | Radius<br>R<br>mm | kg<br>1pc |
| MDS30R4 7510 20 HDG | 100                | 600               | 2.45      |
| MDS30R4 7515 20 HDG | 150                | 600               | 2.64      |
| MDS30R4 7520 20 HDG | 200                | 600               | 2.82      |
| MDS30R4 7525 20 HDG | 250                | 600               | 3.00      |
| MDS30R4 7530 20 HDG | 300                | 600               | 3.19      |
| MDS30R4 7540 20 HDG | 400                | 600               | 3.55      |
| MDS30R4 7545 20 HDG | 450                | 600               | 3.74      |
| MDS30R4 7550 20 HDG | 500                | 600               | 3.92      |
| MDS30R4 7560 20 HDG | 600                | 600               | 4.29      |
| MDS30R4 7570 20 HDG | 700                | 600               | 4.66      |
| MDS30R4 7575 20 HDG | 750                | 600               | 4.84      |
| MDS30R4 7580 20 HDG | 800                | 600               | 5.02      |
| MDS30R4 7590 20 HDG | 900                | 600               | 5.39      |
| MDS30R4 7500 20 HDG | 1000               | 600               | 5.76      |
| MDS30R4 7502 20 HDG | 1200               | 600               | 6.49      |

### MDS30R3 H75 HDG

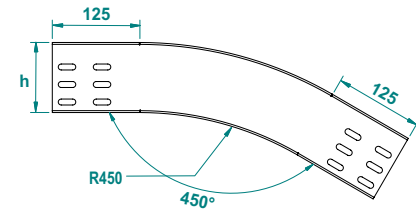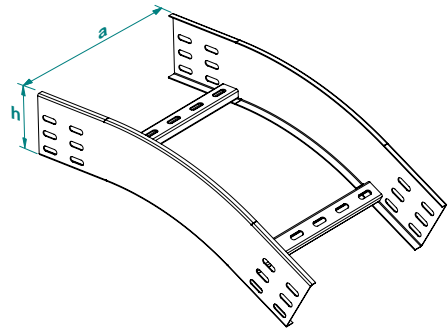

### MDS30R4 H75 HDG

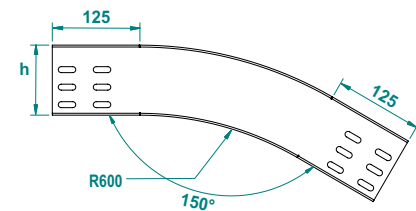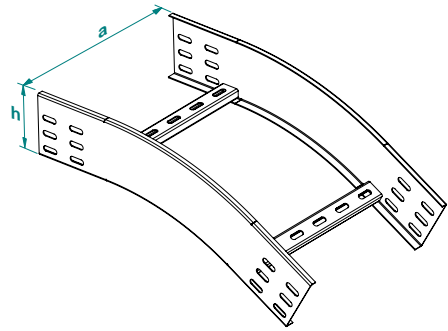

### APPLICATIONS

Cable routing

### MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)


Available finishes:

Steel, strip-galv. acc. to the Sendzimir method  
to TS-EN 10346:2011 (PG)  
SS- stainless steel AISI 304L and AISI 316L (SS)  
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0

## Modular Inside - Outside Cable Ladder Bend

Modular Merdiven iniş - çıkış dönüştürücü - Шарнирная дуга кабельроста

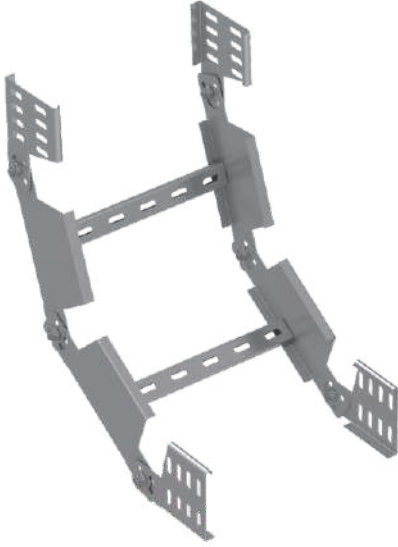

Hot-Dip Galvanized

MMD = 2 pc of MMB + 2 set of BDD


MMD = 2 ADET MMB + 2 Takım BDD'den oluşmaktadır.

| MMD... H75      |                    | 1.5mm             |      | kg<br>1pc | pcs |
|-----------------|--------------------|-------------------|------|-----------|-----|
| CODE            | Width<br>a=b<br>mm | Radius<br>R<br>mm |      |           |     |
| MMD 7510 15 HDG | 100                | 300               | 2.50 | 1         | 1   |
| MMD 7515 15 HDG | 150                | 300               | 2.58 | 1         | 1   |
| MMD 7520 15 HDG | 200                | 300               | 2.67 | 1         | 1   |
| MMD 7525 15 HDG | 250                | 300               | 2.75 | 1         | 1   |
| MMD 7530 15 HDG | 300                | 300               | 2.83 | 1         | 1   |
| MMD 7540 15 HDG | 400                | 300               | 3.00 | 1         | 1   |
| MMD 7545 15 HDG | 450                | 300               | 3.08 | 1         | 1   |
| MMD 7550 15 HDG | 500                | 300               | 3.16 | 1         | 1   |
| MMD 7560 15 HDG | 600                | 300               | 3.33 | 1         | 1   |
| MMD 7570 15 HDG | 700                | 300               | 3.49 | 1         | 1   |
| MMD 7575 15 HDG | 750                | 300               | 3.57 | 1         | 1   |
| MMD 7580 15 HDG | 800                | 300               | 3.66 | 1         | 1   |
| MMD 7590 15 HDG | 900                | 300               | 3.82 | 1         | 1   |
| MMD 7500 15 HDG | 1000               | 300               | 3.98 | 1         | 1   |
| MMD 7502 15 HDG | 1200               | 300               | 4.31 | 1         | 1   |

| MMD... H75      |                    | 2.0mm             |      | kg<br>1pc | pcs |
|-----------------|--------------------|-------------------|------|-----------|-----|
| CODE            | Width<br>a=b<br>mm | Radius<br>R<br>mm |      |           |     |
| MMD 7510 20 HDG | 100                | 300               | 3.33 | 1         | 1   |
| MMD 7515 20 HDG | 150                | 300               | 3.44 | 1         | 1   |
| MMD 7520 20 HDG | 200                | 300               | 3.55 | 1         | 1   |
| MMD 7525 20 HDG | 250                | 300               | 3.66 | 1         | 1   |
| MMD 7530 20 HDG | 300                | 300               | 3.77 | 1         | 1   |
| MMD 7540 20 HDG | 400                | 300               | 3.99 | 1         | 1   |
| MMD 7545 20 HDG | 450                | 300               | 4.10 | 1         | 1   |
| MMD 7550 20 HDG | 500                | 300               | 4.21 | 1         | 1   |
| MMD 7560 20 HDG | 600                | 300               | 4.43 | 1         | 1   |
| MMD 7570 20 HDG | 700                | 300               | 4.65 | 1         | 1   |
| MMD 7575 20 HDG | 750                | 300               | 4.76 | 1         | 1   |
| MMD 7580 20 HDG | 800                | 300               | 4.87 | 1         | 1   |
| MMD 7590 20 HDG | 900                | 300               | 5.09 | 1         | 1   |
| MMD 7500 20 HDG | 1000               | 300               | 5.31 | 1         | 1   |
| MMD 7502 20 HDG | 1200               | 300               | 5.75 | 1         | 1   |

## Modular Adjustable Cable Ladder Riser

Modular Merdiven iniş - çıkış elemanı - Шарнирный элемент дуги кабельроста

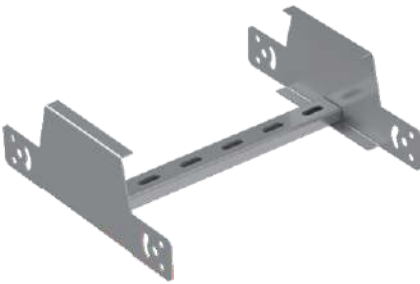

Hot-Dip Galvanized


Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8


| MMB... H75      |                    | 1.5mm |   | kg<br>1pc | pcs |
|-----------------|--------------------|-------|---|-----------|-----|
| CODE            | Width<br>a=b<br>mm |       |   |           |     |
| MMB 7510 15 HDG | 100                | 0.90  | 1 |           |     |
| MMB 7515 15 HDG | 150                | 0.94  | 1 |           |     |
| MMB 7520 15 HDG | 200                | 0.98  | 1 |           |     |
| MMB 7525 15 HDG | 250                | 1.02  | 1 |           |     |
| MMB 7530 15 HDG | 300                | 1.06  | 1 |           |     |
| MMB 7540 15 HDG | 400                | 1.15  | 1 |           |     |
| MMB 7545 15 HDG | 450                | 1.19  | 1 |           |     |
| MMB 7550 15 HDG | 500                | 1.23  | 1 |           |     |
| MMB 7560 15 HDG | 600                | 1.31  | 1 |           |     |
| MMB 7570 15 HDG | 700                | 1.39  | 1 |           |     |
| MMB 7575 15 HDG | 750                | 1.44  | 1 |           |     |
| MMB 7580 15 HDG | 800                | 1.48  | 1 |           |     |
| MMB 7590 15 HDG | 900                | 1.56  | 1 |           |     |
| MMB 7500 15 HDG | 1000               | 1.64  | 1 |           |     |
| MMB 7502 15 HDG | 1200               | 1.81  | 1 |           |     |

| MMB... H75      |                    | 2.0mm |   | kg<br>1pc | pcs |
|-----------------|--------------------|-------|---|-----------|-----|
| CODE            | Width<br>a=b<br>mm |       |   |           |     |
| MMB 7510 20 HDG | 100                | 1.20  | 1 |           |     |
| MMB 7515 20 HDG | 150                | 1.25  | 1 |           |     |
| MMB 7520 20 HDG | 200                | 1.31  | 1 |           |     |
| MMB 7525 20 HDG | 250                | 1.36  | 1 |           |     |
| MMB 7530 20 HDG | 300                | 1.42  | 1 |           |     |
| MMB 7540 20 HDG | 400                | 1.53  | 1 |           |     |
| MMB 7545 20 HDG | 450                | 1.58  | 1 |           |     |
| MMB 7550 20 HDG | 500                | 1.64  | 1 |           |     |
| MMB 7560 20 HDG | 600                | 1.75  | 1 |           |     |
| MMB 7570 20 HDG | 700                | 1.86  | 1 |           |     |
| MMB 7575 20 HDG | 750                | 1.91  | 1 |           |     |
| MMB 7580 20 HDG | 800                | 1.97  | 1 |           |     |
| MMB 7590 20 HDG | 900                | 2.08  | 1 |           |     |
| MMB 7500 20 HDG | 1000               | 2.19  | 1 |           |     |
| MMB 7502 20 HDG | 1200               | 2.41  | 1 |           |     |

### MMD H75 HDG

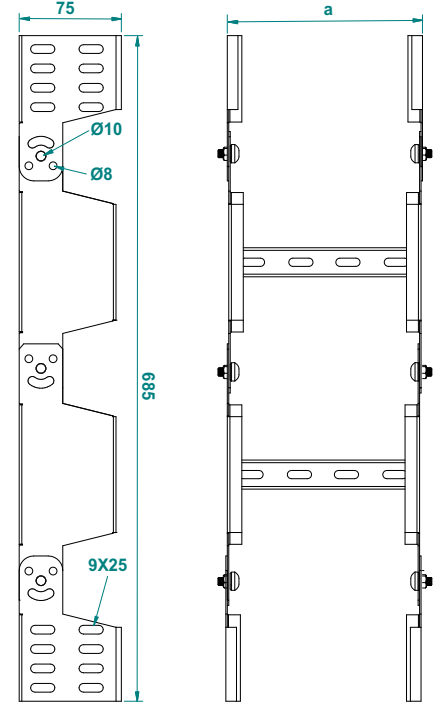

### MMB H75 HDG

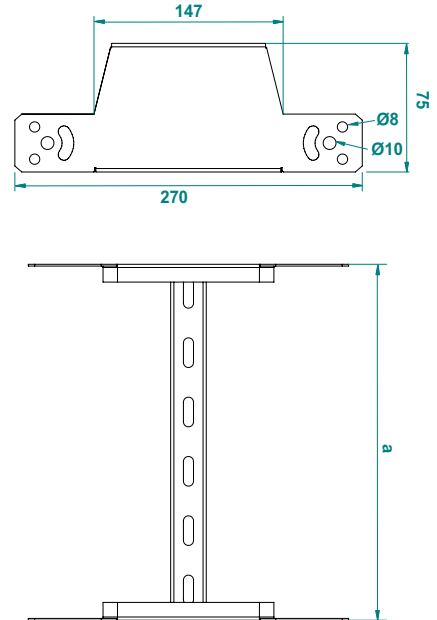

### APPLICATIONS

Cable routing

### MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method to TS-EN 10346:2011 (PG)  
SS- stainless steel AISI 304L and AISI 316L (SS)  
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0


# Cable Ladder Systems of Side Height 75



**MTK**  
MADE IN TURKEY

## Vertical Tee Bend of Cable Ladder, Lengthwise

Dikey "T" Merdiven Dönüş Elemanı - T-отвод кабельлоста вертикальный, развернутый

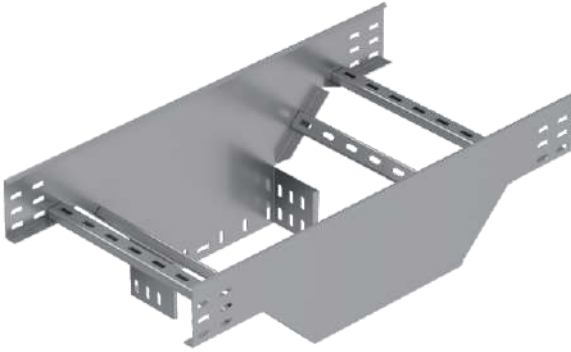

Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8


### Hot-Dip Galvanized

| MDT... H75      |                    | 1.5mm     |     |
|-----------------|--------------------|-----------|-----|
| CODE            | Width<br>a=b<br>mm | kg<br>1pc | pcs |
| MDT 7510 15 HDG | 100                | 3.61      | 1   |
| MDT 7515 15 HDG | 150                | 4.06      | 1   |
| MDT 7520 15 HDG | 200                | 4.51      | 1   |
| MDT 7525 15 HDG | 250                | 4.96      | 1   |
| MDT 7530 15 HDG | 300                | 5.40      | 1   |
| MDT 7540 15 HDG | 400                | 6.30      | 1   |
| MDT 7545 15 HDG | 450                | 6.75      | 1   |
| MDT 7550 15 HDG | 500                | 7.19      | 1   |
| MDT 7560 15 HDG | 600                | 8.09      | 1   |
| MDT 7570 15 HDG | 700                | 8.98      | 1   |
| MDT 7575 15 HDG | 750                | 9.43      | 1   |
| MDT 7580 15 HDG | 800                | 9.88      | 1   |
| MDT 7590 15 HDG | 900                | 10.77     | 1   |
| MDT 7500 15 HDG | 1000               | 11.67     | 1   |
| MDT 7502 15 HDG | 1200               | 13.46     | 1   |

| MDT... H75      |                    | 2.0mm     |     |
|-----------------|--------------------|-----------|-----|
| CODE            | Width<br>a=b<br>mm | kg<br>1pc | pcs |
| MDT 7510 20 HDG | 100                | 4.82      | 1   |
| MDT 7515 20 HDG | 150                | 5.41      | 1   |
| MDT 7520 20 HDG | 200                | 6.01      | 1   |
| MDT 7525 20 HDG | 250                | 6.61      | 1   |
| MDT 7530 20 HDG | 300                | 7.20      | 1   |
| MDT 7540 20 HDG | 400                | 8.40      | 1   |
| MDT 7545 20 HDG | 450                | 8.99      | 1   |
| MDT 7550 20 HDG | 500                | 9.59      | 1   |
| MDT 7560 20 HDG | 600                | 10.78     | 1   |
| MDT 7570 20 HDG | 700                | 11.97     | 1   |
| MDT 7575 20 HDG | 750                | 12.57     | 1   |
| MDT 7580 20 HDG | 800                | 13.17     | 1   |
| MDT 7590 20 HDG | 900                | 14.36     | 1   |
| MDT 7500 20 HDG | 1000               | 15.55     | 1   |
| MDT 7502 20 HDG | 1200               | 17.94     | 1   |

## Vertical Tee Bend of Cable Ladder from the Middle

Dikey Ortadan "T" Merdiven Dönüş Elemanı - T-отвод кабельлоста вертикальный, прямой

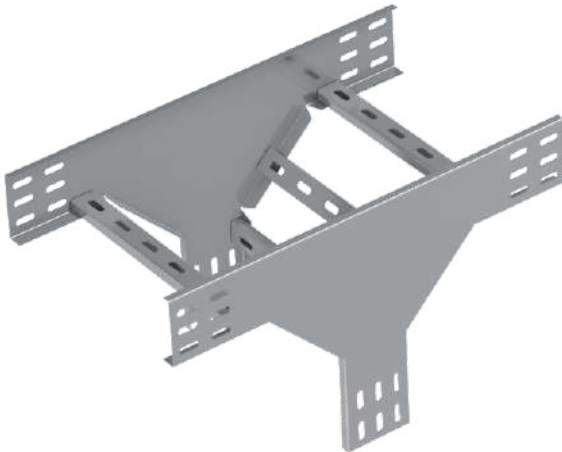

Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

### Hot-Dip Galvanized



| MMT... H75      |                    | 1.5mm     |     |
|-----------------|--------------------|-----------|-----|
| CODE            | Width<br>a=b<br>mm | kg<br>1pc | pcs |
| MMT 7510 15 HDG | 100                | 3.23      | 1   |
| MMT 7515 15 HDG | 150                | 3.43      | 1   |
| MMT 7520 15 HDG | 200                | 3.64      | 1   |
| MMT 7525 15 HDG | 250                | 3.84      | 1   |
| MMT 7530 15 HDG | 300                | 4.05      | 1   |
| MMT 7540 15 HDG | 400                | 4.46      | 1   |
| MMT 7545 15 HDG | 450                | 4.67      | 1   |
| MMT 7550 15 HDG | 500                | 4.88      | 1   |
| MMT 7560 15 HDG | 600                | 5.29      | 1   |
| MMT 7570 15 HDG | 700                | 5.70      | 1   |
| MMT 7575 15 HDG | 750                | 5.91      | 1   |
| MMT 7580 15 HDG | 800                | 6.11      | 1   |
| MMT 7590 15 HDG | 900                | 6.52      | 1   |
| MMT 7500 15 HDG | 1000               | 6.94      | 1   |
| MMT 7502 15 HDG | 1200               | 7.76      | 1   |

| MMT... H75      |                    | 2.0mm     |     |
|-----------------|--------------------|-----------|-----|
| CODE            | Width<br>a=b<br>mm | kg<br>1pc | pcs |
| MMT 7510 20 HDG | 100                | 4.30      | 1   |
| MMT 7515 20 HDG | 150                | 4.58      | 1   |
| MMT 7520 20 HDG | 200                | 4.85      | 1   |
| MMT 7525 20 HDG | 250                | 5.12      | 1   |
| MMT 7530 20 HDG | 300                | 5.40      | 1   |
| MMT 7540 20 HDG | 400                | 5.95      | 1   |
| MMT 7545 20 HDG | 450                | 6.22      | 1   |
| MMT 7550 20 HDG | 500                | 6.50      | 1   |
| MMT 7560 20 HDG | 600                | 7.05      | 1   |
| MMT 7570 20 HDG | 700                | 7.60      | 1   |
| MMT 7575 20 HDG | 750                | 7.87      | 1   |
| MMT 7580 20 HDG | 800                | 8.15      | 1   |
| MMT 7590 20 HDG | 900                | 8.70      | 1   |
| MMT 7500 20 HDG | 1000               | 9.25      | 1   |
| MMT 7502 20 HDG | 1200               | 10.35     | 1   |

### MDT H75 HDG

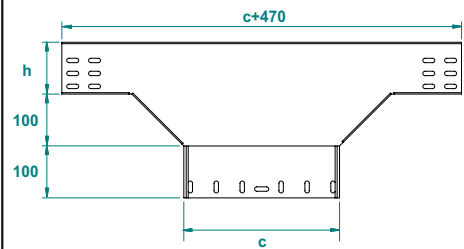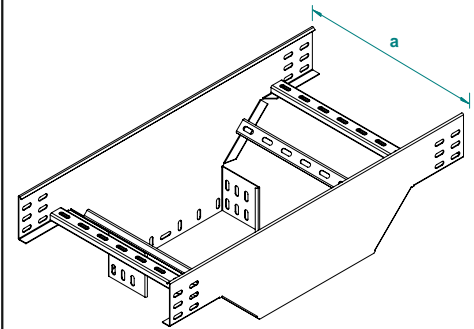

### MMT H75 HDG

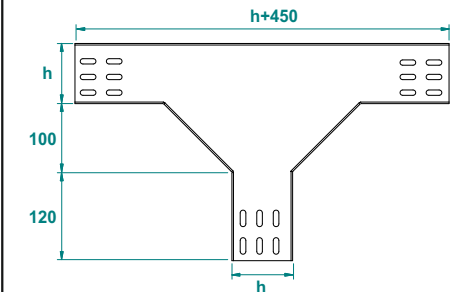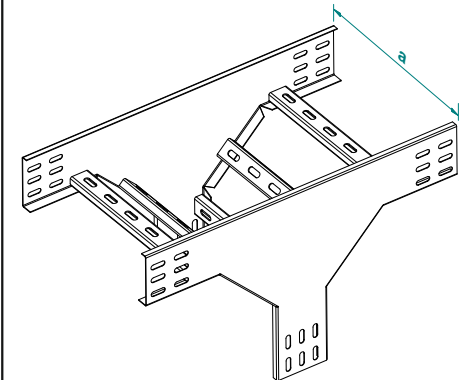

### APPLICATIONS

Cable routing

### MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method

to TS-EN 10346:2011 (PG)

SS- stainless steel AISI 304L and AISI 316L (SS)

EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0


# Cable Ladder Systems of Side Height 75



**MTK**  
MADE IN TURKEY

## Vertical Tee Bend of Cable Ladder from the Middle Radius:300

Dikey Ortadan "T" Merdiven Dönüş Elemanı Radyus:300 - T-отвод кабельроста вертикальный, прямой радиус:300

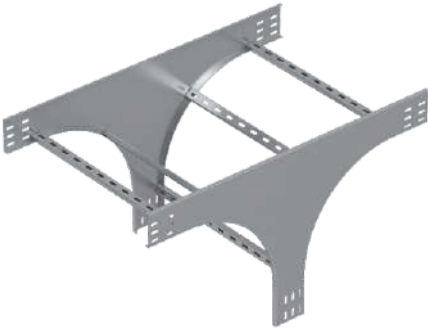

Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8


### Hot-Dip Galvanized

| MMTR2... H75      |                    | 1.5mm             |           |     |  |
|-------------------|--------------------|-------------------|-----------|-----|--|
| CODE              | Width<br>a=b<br>mm | Radius<br>R<br>mm | kg<br>1pc | pcs |  |
| MMTR2 7510 15 HDG | 100                | 300               | 6.85      | 1   |  |
| MMTR2 7515 15 HDG | 150                | 300               | 7.08      | 1   |  |
| MMTR2 7520 15 HDG | 200                | 300               | 7.31      | 1   |  |
| MMTR2 7525 15 HDG | 250                | 300               | 7.54      | 1   |  |
| MMTR2 7530 15 HDG | 300                | 300               | 7.77      | 1   |  |
| MMTR2 7540 15 HDG | 400                | 300               | 8.23      | 1   |  |
| MMTR2 7545 15 HDG | 450                | 300               | 8.46      | 1   |  |
| MMTR2 7550 15 HDG | 500                | 300               | 8.69      | 1   |  |
| MMTR2 7560 15 HDG | 600                | 300               | 9.15      | 1   |  |
| MMTR2 7570 15 HDG | 700                | 300               | 9.61      | 1   |  |
| MMTR2 7575 15 HDG | 750                | 300               | 9.84      | 1   |  |
| MMTR2 7580 15 HDG | 800                | 300               | 10.07     | 1   |  |
| MMTR2 7590 15 HDG | 900                | 300               | 10.57     | 1   |  |
| MMTR2 7500 15 HDG | 1000               | 300               | 10.98     | 1   |  |
| MMTR2 7502 15 HDG | 1200               | 300               | 11.90     | 1   |  |

| MMTR2... H75      |                    | 2.0mm             |           |     |  |
|-------------------|--------------------|-------------------|-----------|-----|--|
| CODE              | Width<br>a=b<br>mm | Radius<br>R<br>mm | kg<br>1pc | pcs |  |
| MMTR2 7510 20 HDG | 100                | 300               | 9.13      | 1   |  |
| MMTR2 7515 20 HDG | 150                | 300               | 9.44      | 1   |  |
| MMTR2 7520 20 HDG | 200                | 300               | 9.75      | 1   |  |
| MMTR2 7525 20 HDG | 250                | 300               | 10.05     | 1   |  |
| MMTR2 7530 20 HDG | 300                | 300               | 10.36     | 1   |  |
| MMTR2 7540 20 HDG | 400                | 300               | 10.97     | 1   |  |
| MMTR2 7545 20 HDG | 450                | 300               | 11.28     | 1   |  |
| MMTR2 7550 20 HDG | 500                | 300               | 11.58     | 1   |  |
| MMTR2 7560 20 HDG | 600                | 300               | 12.19     | 1   |  |
| MMTR2 7570 20 HDG | 700                | 300               | 12.81     | 1   |  |
| MMTR2 7575 20 HDG | 750                | 300               | 13.11     | 1   |  |
| MMTR2 7580 20 HDG | 800                | 300               | 13.42     | 1   |  |
| MMTR2 7590 20 HDG | 900                | 300               | 14.03     | 1   |  |
| MMTR2 7500 20 HDG | 1000               | 300               | 14.64     | 1   |  |
| MMTR2 7502 20 HDG | 1200               | 300               | 15.87     | 1   |  |

## Vertical Tee Bend of Cable Ladder from the Middle Radius:600

Dikey Ortadan "T" Merdiven Dönüş Elemanı Radyus:600 - T-отвод кабельроста вертикальный, прямой радиус:600

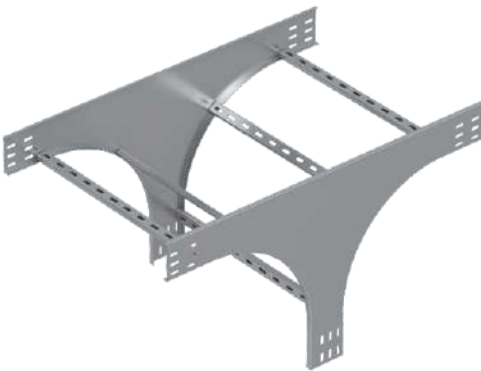

Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

### Hot-Dip Galvanized



| MMTR4... H75      |                    | 1.5mm             |           |     |  |
|-------------------|--------------------|-------------------|-----------|-----|--|
| CODE              | Width<br>a=b<br>mm | Radius<br>R<br>mm | kg<br>1pc | pcs |  |
| MMTR4 7510 15 HDG | 100                | 600               | 12.02     | 1   |  |
| MMTR4 7515 15 HDG | 150                | 600               | 12.44     | 1   |  |
| MMTR4 7520 15 HDG | 200                | 600               | 12.85     | 1   |  |
| MMTR4 7525 15 HDG | 250                | 600               | 13.26     | 1   |  |
| MMTR4 7530 15 HDG | 300                | 600               | 13.68     | 1   |  |
| MMTR4 7540 15 HDG | 400                | 600               | 14.50     | 1   |  |
| MMTR4 7545 15 HDG | 450                | 600               | 14.92     | 1   |  |
| MMTR4 7550 15 HDG | 500                | 600               | 15.33     | 1   |  |
| MMTR4 7560 15 HDG | 600                | 600               | 16.16     | 1   |  |
| MMTR4 7570 15 HDG | 700                | 600               | 16.98     | 1   |  |
| MMTR4 7575 15 HDG | 750                | 600               | 17.40     | 1   |  |
| MMTR4 7580 15 HDG | 800                | 600               | 17.81     | 1   |  |
| MMTR4 7590 15 HDG | 900                | 600               | 18.64     | 1   |  |
| MMTR4 7500 15 HDG | 1000               | 600               | 19.46     | 1   |  |
| MMTR4 7502 15 HDG | 1200               | 600               | 21.12     | 1   |  |

| MMTR4... H75      |                    | 2.0mm             |           |     |  |
|-------------------|--------------------|-------------------|-----------|-----|--|
| CODE              | Width<br>a=b<br>mm | Radius<br>R<br>mm | kg<br>1pc | pcs |  |
| MMTR4 7510 20 HDG | 100                | 600               | 16.03     | 1   |  |
| MMTR4 7515 20 HDG | 150                | 600               | 16.58     | 1   |  |
| MMTR4 7520 20 HDG | 200                | 600               | 17.13     | 1   |  |
| MMTR4 7525 20 HDG | 250                | 600               | 17.68     | 1   |  |
| MMTR4 7530 20 HDG | 300                | 600               | 18.23     | 1   |  |
| MMTR4 7540 20 HDG | 400                | 600               | 19.33     | 1   |  |
| MMTR4 7545 20 HDG | 450                | 600               | 19.89     | 1   |  |
| MMTR4 7550 20 HDG | 500                | 600               | 20.44     | 1   |  |
| MMTR4 7560 20 HDG | 600                | 600               | 21.54     | 1   |  |
| MMTR4 7570 20 HDG | 700                | 600               | 22.64     | 1   |  |
| MMTR4 7575 20 HDG | 750                | 600               | 23.19     | 1   |  |
| MMTR4 7580 20 HDG | 800                | 600               | 23.74     | 1   |  |
| MMTR4 7590 20 HDG | 900                | 600               | 24.85     | 1   |  |
| MMTR4 7500 20 HDG | 1000               | 600               | 25.95     | 1   |  |
| MMTR4 7502 20 HDG | 1200               | 600               | 28.15     | 1   |  |

### MMTR2 H75 HDG

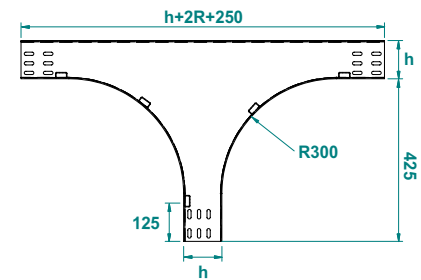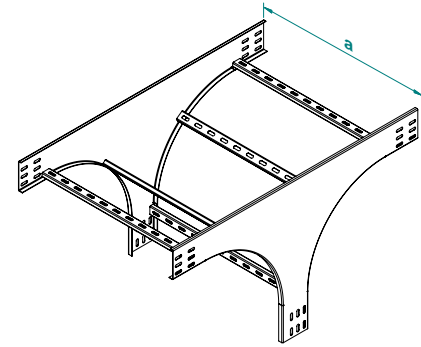

### MMTR4 H75 HDG

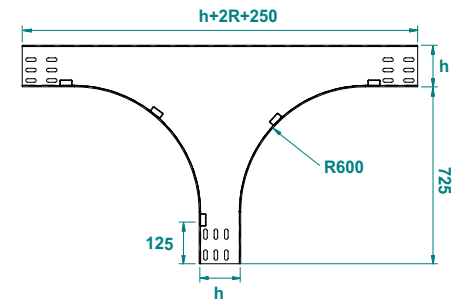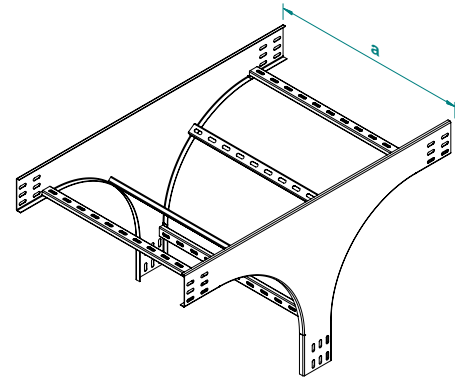

### APPLICATIONS

Cable routing

### MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method to TS-EN 10346:2011 (PG)  
SS- stainless steel AISI 304L and AISI 316L (SS)  
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0


# Cable Ladder Systems of Side Height 75



**MTK**  
MADE IN TURKEY

## Middle Reducer Connection (set)

Parçalı Redüksiyon (Orta) - Редукционные планки, симметричные

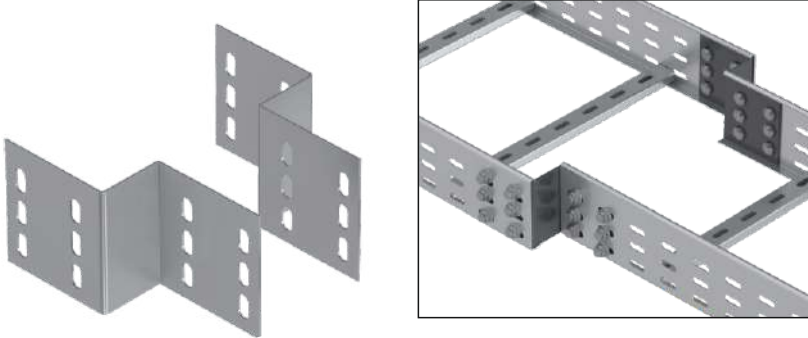

Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

## Hot-Dip Galvanized

| RO... H75      |                      |             |     | 1.5mm          |                      |             |     |
|----------------|----------------------|-------------|-----|----------------|----------------------|-------------|-----|
| CODE           | Reduction<br>a<br>mm | kg<br>1 set | pcs | CODE           | Reduction<br>a<br>mm | kg<br>1 set | pcs |
| RO 7505 15 HDG | 50                   | 0.33        | 1   | RO 7505 20 HDG | 50                   | 0.44        | 1   |
| RO 7510 15 HDG | 100                  | 0.38        | 1   | RO 7510 20 HDG | 100                  | 0.51        | 1   |
| RO 7515 15 HDG | 150                  | 0.43        | 1   | RO 7515 20 HDG | 150                  | 0.57        | 1   |
| RO 7520 15 HDG | 200                  | 0.48        | 1   | RO 7520 20 HDG | 200                  | 0.63        | 1   |
| RO 7525 15 HDG | 250                  | 0.52        | 1   | RO 7525 20 HDG | 250                  | 0.70        | 1   |
| RO 7530 15 HDG | 300                  | 0.57        | 1   | RO 7530 20 HDG | 300                  | 0.76        | 1   |
| RO 7535 15 HDG | 350                  | 0.62        | 1   | RO 7535 20 HDG | 350                  | 0.82        | 1   |
| RO 7540 15 HDG | 400                  | 0.66        | 1   | RO 7540 20 HDG | 400                  | 0.88        | 1   |
| RO 7545 15 HDG | 450                  | 0.71        | 1   | RO 7545 20 HDG | 450                  | 0.95        | 1   |
| RO 7550 15 HDG | 500                  | 0.76        | 1   | RO 7550 20 HDG | 500                  | 1.01        | 1   |
| RO 7555 15 HDG | 550                  | 0.81        | 1   | RO 7555 20 HDG | 550                  | 1.07        | 1   |
| RO 7560 15 HDG | 600                  | 0.85        | 1   | RO 7560 20 HDG | 600                  | 1.14        | 1   |
| RO 7565 15 HDG | 650                  | 0.90        | 1   | RO 7565 20 HDG | 650                  | 1.20        | 1   |
| RO 7570 15 HDG | 700                  | 0.95        | 1   | RO 7570 20 HDG | 700                  | 1.26        | 1   |
| RO 7575 15 HDG | 750                  | 0.99        | 1   | RO 7575 20 HDG | 750                  | 1.32        | 1   |
| RO 7580 15 HDG | 800                  | 1.04        | 1   | RO 7580 20 HDG | 800                  | 1.39        | 1   |
| RO 7590 15 HDG | 900                  | 1.14        | 1   | RO 7590 20 HDG | 900                  | 1.51        | 1   |

## Stop End (Blind End)

Sonlandırma - Зарпнушка





Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8



## Hot-Dip Galvanized

| SON... H75      |                    |           |     | 1.5mm           |                    |           |     |
|-----------------|--------------------|-----------|-----|-----------------|--------------------|-----------|-----|
| CODE            | Width<br>a=b<br>mm | kg<br>1pc | pcs | CODE            | Width<br>a=b<br>mm | kg<br>1pc | pcs |
| SON 7510 15 HDG | 100                | 0.21      | 1   | SON 7510 20 HDG | 100                | 0.28      | 1   |
| SON 7515 15 HDG | 150                | 0.26      | 1   | SON 7515 20 HDG | 150                | 0.34      | 1   |
| SON 7520 15 HDG | 200                | 0.31      | 1   | SON 7520 20 HDG | 200                | 0.41      | 1   |
| SON 7525 15 HDG | 250                | 0.35      | 1   | SON 7525 20 HDG | 250                | 0.47      | 1   |
| SON 7530 15 HDG | 300                | 0.40      | 1   | SON 7530 20 HDG | 300                | 0.53      | 1   |
| SON 7540 15 HDG | 400                | 0.49      | 1   | SON 7540 20 HDG | 400                | 0.66      | 1   |
| SON 7545 15 HDG | 450                | 0.54      | 1   | SON 7545 20 HDG | 450                | 0.72      | 1   |
| SON 7550 15 HDG | 500                | 0.59      | 1   | SON 7550 20 HDG | 500                | 0.78      | 1   |
| SON 7560 15 HDG | 600                | 0.68      | 1   | SON 7560 20 HDG | 600                | 0.91      | 1   |
| SON 7570 15 HDG | 700                | 0.78      | 1   | SON 7570 20 HDG | 700                | 1.03      | 1   |
| SON 7575 15 HDG | 750                | 0.82      | 1   | SON 7575 20 HDG | 750                | 1.10      | 1   |
| SON 7580 15 HDG | 800                | 0.87      | 1   | SON 7580 20 HDG | 800                | 1.16      | 1   |
| SON 7590 15 HDG | 900                | 0.97      | 1   | SON 7590 20 HDG | 900                | 1.29      | 1   |
| SON 7500 15 HDG | 1000               | 1.06      | 1   | SON 7500 20 HDG | 1000               | 1.41      | 1   |
| SON 7502 15 HDG | 1200               | 1.25      | 1   | SON 7502 20 HDG | 1200               | 1.66      | 1   |

## RO H75 HDG

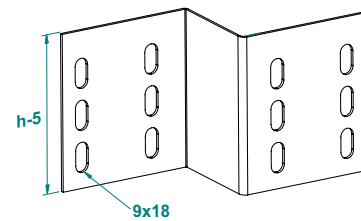

## SON H75 HDG

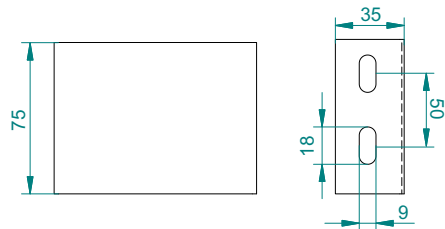

## APPLICATIONS

Cable routing

## MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:



Steel, strip-galv. acc. to the Sendzimir method  
to TS-EN 10346:2011 (PG)  
SS- stainless steel AISI 304L and AISI 316L (SS)  
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0



## Left Reducer Connection (set)

Parçalı Redüksiyon (Sol) - Редукционные планки, левосторонние

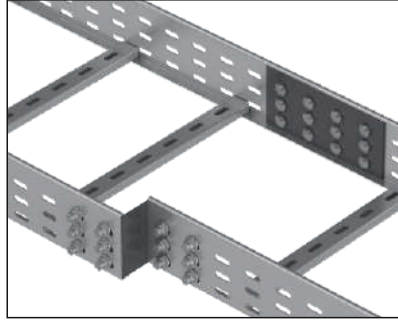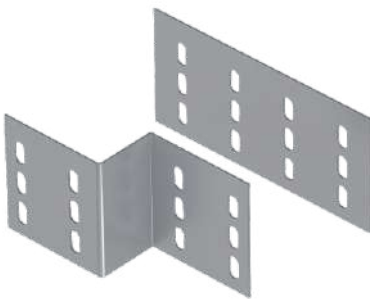

Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8



## Hot-Dip Galvanized

| RL... H75      |                      | 1.5mm       |     |
|----------------|----------------------|-------------|-----|
| CODE           | Reduction<br>a<br>mm | kg<br>1 set | pcs |
| RL 7505 15 HDG | 50                   | 0.33        | 1   |
| RL 7510 15 HDG | 100                  | 0.38        | 1   |
| RL 7515 15 HDG | 150                  | 0.43        | 1   |
| RL 7520 15 HDG | 200                  | 0.48        | 1   |
| RL 7525 15 HDG | 250                  | 0.52        | 1   |
| RL 7530 15 HDG | 300                  | 0.57        | 1   |
| RL 7535 15 HDG | 350                  | 0.62        | 1   |
| RL 7540 15 HDG | 400                  | 0.66        | 1   |
| RL 7545 15 HDG | 450                  | 0.71        | 1   |
| RL 7550 15 HDG | 500                  | 0.76        | 1   |
| RL 7555 15 HDG | 550                  | 0.81        | 1   |
| RL 7560 15 HDG | 600                  | 0.85        | 1   |
| RL 7565 15 HDG | 650                  | 0.90        | 1   |
| RL 7570 15 HDG | 700                  | 0.95        | 1   |
| RL 7575 15 HDG | 750                  | 0.99        | 1   |
| RL 7580 15 HDG | 800                  | 1.04        | 1   |
| RL 7590 15 HDG | 900                  | 1.14        | 1   |

| RL... H75      |                      | 2.0mm       |     |
|----------------|----------------------|-------------|-----|
| CODE           | Reduction<br>a<br>mm | kg<br>1 set | pcs |
| RL 7505 20 HDG | 50                   | 0.44        | 1   |
| RL 7510 20 HDG | 100                  | 0.51        | 1   |
| RL 7515 20 HDG | 150                  | 0.57        | 1   |
| RL 7520 20 HDG | 200                  | 0.63        | 1   |
| RL 7525 20 HDG | 250                  | 0.70        | 1   |
| RL 7530 20 HDG | 300                  | 0.76        | 1   |
| RL 7535 20 HDG | 350                  | 0.82        | 1   |
| RL 7540 20 HDG | 400                  | 0.88        | 1   |
| RL 7545 20 HDG | 450                  | 0.95        | 1   |
| RL 7550 20 HDG | 500                  | 1.01        | 1   |
| RL 7555 20 HDG | 550                  | 1.07        | 1   |
| RL 7560 20 HDG | 600                  | 1.14        | 1   |
| RL 7565 20 HDG | 650                  | 1.20        | 1   |
| RL 7570 20 HDG | 700                  | 1.26        | 1   |
| RL 7575 20 HDG | 750                  | 1.32        | 1   |
| RL 7580 20 HDG | 800                  | 1.39        | 1   |
| RL 7590 20 HDG | 900                  | 1.51        | 1   |

## Right Reducer Connection (set)

Parçalı Redüksiyon (Sağ) - Редукционные планки, правосторонние

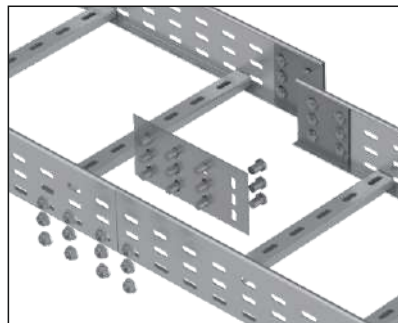

Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

## Hot-Dip Galvanized



| RG... H75      |                      | 1.5mm       |     |
|----------------|----------------------|-------------|-----|
| CODE           | Reduction<br>a<br>mm | kg<br>1 set | pcs |
| RG 7505 15 HDG | 50                   | 0.33        | 1   |
| RG 7510 15 HDG | 100                  | 0.38        | 1   |
| RG 7515 15 HDG | 150                  | 0.43        | 1   |
| RG 7520 15 HDG | 200                  | 0.48        | 1   |
| RG 7525 15 HDG | 250                  | 0.52        | 1   |
| RG 7530 15 HDG | 300                  | 0.57        | 1   |
| RG 7535 15 HDG | 350                  | 0.62        | 1   |
| RG 7540 15 HDG | 400                  | 0.66        | 1   |
| RG 7545 15 HDG | 450                  | 0.71        | 1   |
| RG 7550 15 HDG | 500                  | 0.76        | 1   |
| RG 7555 15 HDG | 550                  | 0.81        | 1   |
| RG 7560 15 HDG | 600                  | 0.85        | 1   |
| RG 7565 15 HDG | 650                  | 0.90        | 1   |
| RG 7570 15 HDG | 700                  | 0.95        | 1   |
| RG 7575 15 HDG | 750                  | 0.99        | 1   |
| RG 7580 15 HDG | 800                  | 1.04        | 1   |
| RG 7590 15 HDG | 900                  | 1.14        | 1   |

| RG... H75      |                      | 2.0mm       |     |
|----------------|----------------------|-------------|-----|
| CODE           | Reduction<br>a<br>mm | kg<br>1 set | pcs |
| RG 7505 20 HDG | 50                   | 0.44        | 1   |
| RG 7510 20 HDG | 100                  | 0.51        | 1   |
| RG 7515 20 HDG | 150                  | 0.57        | 1   |
| RG 7520 20 HDG | 200                  | 0.63        | 1   |
| RG 7525 20 HDG | 250                  | 0.70        | 1   |
| RG 7530 20 HDG | 300                  | 0.76        | 1   |
| RG 7535 20 HDG | 350                  | 0.82        | 1   |
| RG 7540 20 HDG | 400                  | 0.88        | 1   |
| RG 7545 20 HDG | 450                  | 0.95        | 1   |
| RG 7550 20 HDG | 500                  | 1.01        | 1   |
| RG 7555 20 HDG | 550                  | 1.07        | 1   |
| RG 7560 20 HDG | 600                  | 1.14        | 1   |
| RG 7565 20 HDG | 650                  | 1.20        | 1   |
| RG 7570 20 HDG | 700                  | 1.26        | 1   |
| RG 7575 20 HDG | 750                  | 1.32        | 1   |
| RG 7580 20 HDG | 800                  | 1.39        | 1   |
| RG 7590 20 HDG | 900                  | 1.51        | 1   |

## RL H75 HDG

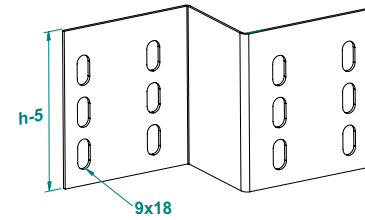

## RG H75 HDG

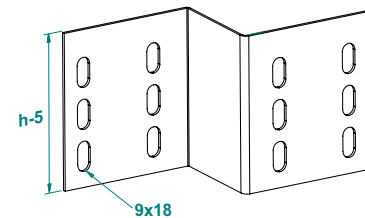

## APPLICATIONS

Cable routing

## MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method

to TS-EN 10346:2011 (PG)

SS- stainless steel AISI 304L and AISI 316L (SS)

EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0

## Adjustable Vertical Connector

Dikey Seviye Degistirme Eki - Шарнирный соединитель



BDD 275

BDD 375

### Hot-Dip Galvanized


| BDD 2 ... H75  |                   | 1.5mm       |             |     |
|----------------|-------------------|-------------|-------------|-----|
| CODE           | Length<br>L<br>mm | kg<br>ad/pc | kg<br>ad/pc | pcs |
| BDD 275 15 HDG | 250               | 0.36        |             | 50  |
|                |                   | 2.0mm       |             |     |
| BDD 275 20 HDG | 250               | 0.48        |             | 50  |
|                |                   | 2.5mm       |             |     |
| BDD 275 25 HDG | 250               | 0.60        |             | 50  |

Important!  
To install cable tray - bend use Screw Sets  
CFS M6 or CFS M8

| BDD 3 ... H75  |                   | 1.5mm       |             |     |
|----------------|-------------------|-------------|-------------|-----|
| CODE           | Length<br>L<br>mm | kg<br>ad/pc | kg<br>ad/pc | pcs |
| BDD 375 15 HDG | 250               | 0.40        |             | 50  |
|                |                   | 2.0mm       |             |     |
| BDD 375 20 HDG | 250               | 0.53        |             | 50  |
|                |                   | 2.5mm       |             |     |
| BDD 375 25 HDG | 250               | 0.66        |             | 50  |

## Adjustable Horizontal Connector - Long Type

Yatay seviye degistirme eki - Uzun - Угловой соединитель - длинный

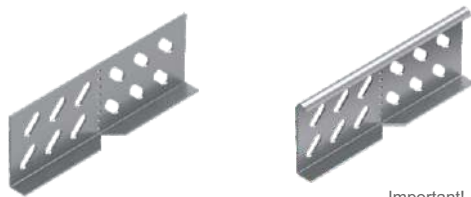

### Pre - Galvanized

| BYD 2 ... H75  |                   | 1.5mm    |          |     |
|----------------|-------------------|----------|----------|-----|
| CODE           | Length<br>L<br>mm | kg<br>1m | kg<br>1m | pcs |
| BYD 275 15 HDG | 175               | 0.20     |          | 1   |
|                |                   | 2.0mm    |          |     |
| BYD 275 20 HDG | 175               | 0.27     |          | 1   |
|                |                   | 2.5mm    |          |     |
| BYD 275 25 HDG | 175               | 0.33     |          | 50  |

Important!  
To install cable tray - bend use Screw Sets  
CFS M6 or CFS M8

| BYD 3 ... H75  |                   | 1.5mm    |          |     |
|----------------|-------------------|----------|----------|-----|
| CODE           | Length<br>L<br>mm | kg<br>1m | kg<br>1m | pcs |
| BYD 375 15 HDG | 175               | 0.22     |          | 1   |
|                |                   | 2.0mm    |          |     |
| BYD 375 20 HDG | 175               | 0.29     |          | 1   |
|                |                   | 2.5mm    |          |     |
| BYD 375 25 HDG | 175               | 0.37     |          | 50  |

## Seperator

Seperator - Перегородка



SEP 1

SEP 2

### Pre - Galvanized


| SEP 1 ... H75  |                   | 1.0mm             |          |          |
|----------------|-------------------|-------------------|----------|----------|
| CODE           | Height<br>H<br>mm | Length<br>L<br>mm | kg<br>1m | kg<br>1m |
| SEP 175 10 HDG | 70                | 3000              | 0.67     | 1        |
|                |                   |                   | 1.5mm    |          |
| SEP 175 15 HDG | 70                | 3000              | 1.01     | 1        |
|                |                   |                   | 2.0mm    |          |
| SEP 175 20 HDG | 70                | 3000              | 1.34     | 1        |

Important!  
To install cable tray - bend use Screw Sets  
CFS M6 or CFS M8


| SEP 2 ... H75  |                   | 1.0mm             |          |          |
|----------------|-------------------|-------------------|----------|----------|
| CODE           | Height<br>H<br>mm | Length<br>L<br>mm | kg<br>1m | kg<br>1m |
| SEP 275 10 HDG | 70                | 3000              | 0.75     | 1        |
|                |                   |                   | 1.5mm    |          |
| SEP 275 15 HDG | 70                | 3000              | 1.12     | 1        |
|                |                   |                   | 2.0mm    |          |
| SEP 275 20 HDG | 70                | 3000              | 1.50     | 1        |



BDD 275




BDD 375

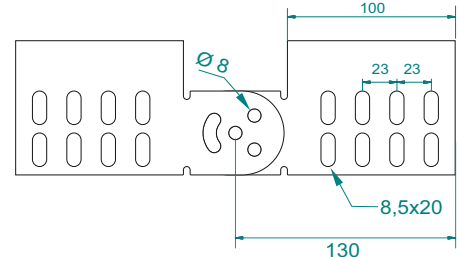

BYD 275







BYD 375

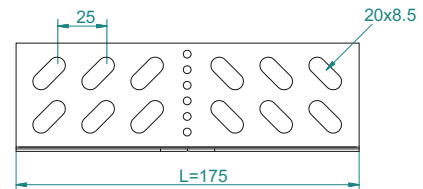

SEP 1 HDG

SEP 2 HDG

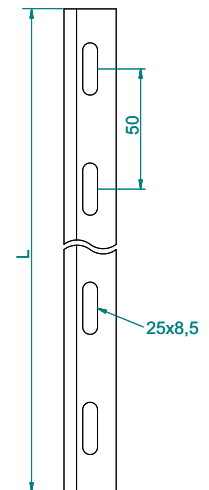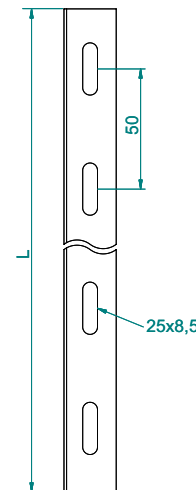

### APPLICATIONS

Cable routing

### MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method

to TS-EN 10346:2011 (PG)

SS- stainless steel AISI 304L and AISI 316L (SS)

EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0