


Cable Ladder Systems of Side Height 80



Cable Ladder

Kablo Merdiveni SKM Serisi - Кабельлесты

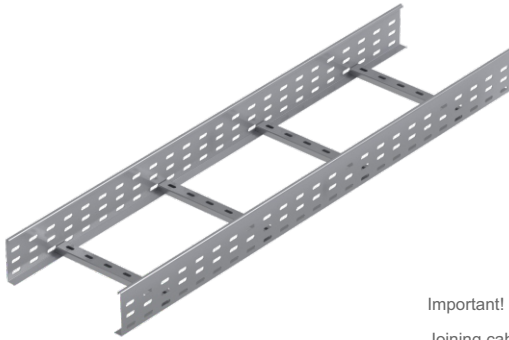

Important!

Joining cable ladder sections together only through the use of couplers 2 pcs for 1 length To install cable ladder-straight use Screw sets CFS M6 or CFS M8


Hot-Dip Galvanized

SKM ... H80		1.5mm		
CODE	Width a mm	Length L mm	KG 1m	pcs
SKM 810 15 HDG	100	3000	2.99	2
SKM 815 15 HDG	150	3000	3.13	2
SKM 820 15 HDG	200	3000	3.26	2
SKM 825 15 HDG	250	3000	3.40	2
SKM 830 15 HDG	300	3000	3.54	2
SKM 840 15 HDG	400	3000	3.81	2
SKM 845 15 HDG	450	3000	3.95	2
SKM 850 15 HDG	500	3000	4.09	2
SKM 860 15 HDG	600	3000	4.36	2
SKM 870 15 HDG	700	3000	4.64	2
SKM 875 15 HDG	750	3000	4.77	2
SKM 880 15 HDG	800	3000	4.91	2
SKM 890 15 HDG	900	3000	5.19	2
SKM 800 15 HDG	1000	3000	5.46	2
SKM 802 15 HDG	1200	3000	6.01	2

SKM ... H80		2.0mm		
CODE	Width a mm	Length L mm	KG 1m	pcs
SKM 810 20 HDG	100	3000	3.98	2
SKM 815 20 HDG	150	3000	4.17	2
SKM 820 20 HDG	200	3000	4.35	2
SKM 825 20 HDG	250	3000	4.53	2
SKM 830 20 HDG	300	3000	4.71	2
SKM 840 20 HDG	400	3000	5.08	2
SKM 845 20 HDG	450	3000	5.26	2
SKM 850 20 HDG	500	3000	5.45	2
SKM 860 20 HDG	600	3000	5.81	2
SKM 870 20 HDG	700	3000	6.18	2
SKM 875 20 HDG	750	3000	6.36	2
SKM 880 20 HDG	800	3000	6.55	2
SKM 890 20 HDG	900	3000	6.91	2
SKM 800 20 HDG	1000	3000	7.28	2
SKM 802 20 HDG	1200	3000	8.01	2

Fixing Unit for Cable Ladder

Merdiveni Sabitleme Elemanı - Фиксатор кабельлесты, боковой



Hot-Dip Galvanized


MT/1		3.0mm		
CODE	Size h mm	Thickness T mm	KG ad/pc	pcs
MT/1 HDG	35x50	3,0	0,040	100

Stainless Steel - SS 304

MT/1		2.5mm		
CODE	Size h mm	Thickness T mm	KG ad/pc	pcs
MT/1 S4	35x50	2,5	0,032	100

Straight Connector (Coupler)

Birleştirme Elemanı - Прямой соединитель



Hot-Dip Galvanized

KBE 2 ... H80		1.5mm		
CODE	Height h mm	Length L mm	KG ad/pc	pcs
KBE 280 15 HDG	70	175	0.20	100
		2.0mm		
KBE 280 20 HDG	70	175	0.27	100
		2.5mm		
KBE 280 25 HDG	70	175	0.33	100

To install one length; use 2 pieces of KBE connector
8 sets of CFS bolts and nuts. (M6 or M8)



KBE 3 ... H80		1.5mm		
CODE	Height h mm	Length L mm	KG ad/pc	pcs
KBE 380 15 HDG	85	175	0.22	100
		2.0mm		
KBE 380 20 HDG	85	175	0.29	100
		2.5mm		
KBE 380 25 HDG	85	175	0.37	100

Dacromet

CFS		M6		
CODE	Size mm	Length mm	KG 1 Set	pcs
CFS M6 HDG	M6	15	0,008	500


CFS		M8		
CODE	Size mm	Length mm	KG 1 Set	pcs
CFS M8 HDG	M8	15	0,014	500

SKM H80 HDG

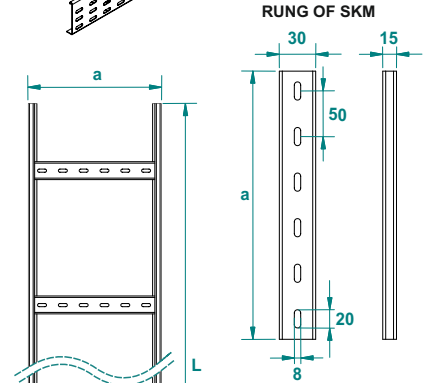
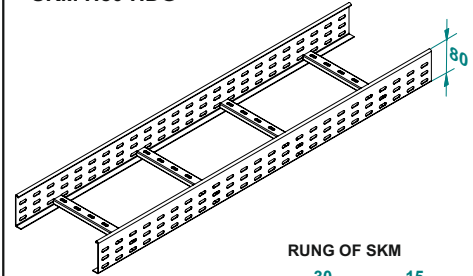


Width	Cross Section
100	83
150	125,5
200	168
300	253
400	338
500	423
600	508
750	635,5
900	763
1000	848
1200	1018

MT/1




KBE 2 H80 HDG



CFS

Round head square neck bolt & Flanged nut



APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method


SS- stainless steel AISI 304L and AISI 316L (SS)

EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0

Cable Ladder

Kablo Merdiveni UKM Serisi - Кабельлесты

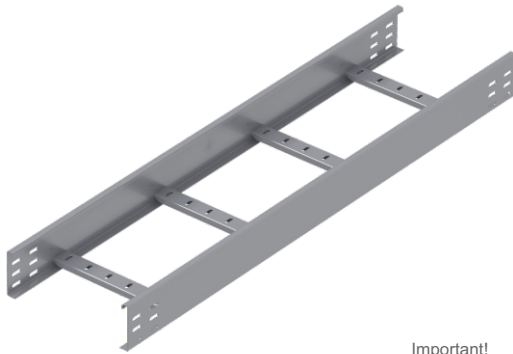

Important!

Joining cable ladder sections together only through the use of couplers 2 pcs for 1 length To install cable ladder-straight use Screw sets CFS M6 or CFS M8

Hot-Dip Galvanized



UKM ... H80				1.5mm	
CODE	Width a mm	Length L mm	kg 1m	pcs	
UKM 810 15 HDG	100	3000	3.25	2	
UKM 815 15 HDG	150	3000	3.41	2	
UKM 820 15 HDG	200	3000	3.56	2	
UKM 825 15 HDG	250	3000	3.71	2	
UKM 830 15 HDG	300	3000	3.87	2	
UKM 840 15 HDG	400	3000	4.17	2	
UKM 845 15 HDG	450	3000	4.33	2	
UKM 850 15 HDG	500	3000	4.48	2	
UKM 860 15 HDG	600	3000	4.79	2	
UKM 870 15 HDG	700	3000	5.09	2	
UKM 875 15 HDG	750	3000	5.24	2	
UKM 880 15 HDG	800	3000	5.40	2	
UKM 890 15 HDG	900	3000	5.70	2	
UKM 800 15 HDG	1000	3000	6.01	2	
UKM 802 15 HDG	1200	3000	6.62	2	

UKM ... H100				2.5mm	
CODE	Width a mm	Length L mm	kg 1m	pcs	
UKM 810 25 HDG	100	3000	5.42	2	
UKM 815 25 HDG	150	3000	5.68	2	
UKM 820 25 HDG	200	3000	5.93	2	
UKM 825 25 HDG	250	3000	6.19	2	
UKM 830 25 HDG	300	3000	6.44	2	
UKM 840 25 HDG	400	3000	6.95	2	
UKM 845 25 HDG	450	3000	7.21	2	
UKM 850 25 HDG	500	3000	7.46	2	
UKM 860 25 HDG	600	3000	7.97	2	
UKM 870 25 HDG	700	3000	8.48	2	
UKM 875 25 HDG	750	3000	8.74	2	
UKM 880 25 HDG	800	3000	8.99	2	
UKM 890 25 HDG	900	3000	9.50	2	
UKM 800 25 HDG	1000	3000	10.01	2	
UKM 802 25 HDG	1200	3000	11.03	2	

UKM ... H80				2.0mm	
CODE	Width a mm	Length L mm	kg 1m	pcs	
UKM 810 20 HDG	100	3000	4.34	2	
UKM 815 20 HDG	150	3000	4.54	2	
UKM 820 20 HDG	200	3000	4.75	2	
UKM 825 20 HDG	250	3000	4.95	2	
UKM 830 20 HDG	300	3000	5.15	2	
UKM 840 20 HDG	400	3000	5.56	2	
UKM 845 20 HDG	450	3000	5.77	2	
UKM 850 20 HDG	500	3000	5.97	2	
UKM 860 20 HDG	600	3000	6.38	2	
UKM 870 20 HDG	700	3000	6.79	2	
UKM 875 20 HDG	750	3000	6.99	2	
UKM 880 20 HDG	800	3000	7.20	2	
UKM 890 20 HDG	900	3000	7.60	2	
UKM 800 20 HDG	1000	3000	8.10	2	
UKM 802 20 HDG	1200	3000	8.83	2	


UKM ... H100				3.0mm	
CODE	Width a mm	Length L mm	kg 1m	pcs	
UKM 810 30 HDG	100	3000	6.50	2	
UKM 815 30 HDG	150	3000	6.81	2	
UKM 820 30 HDG	200	3000	7.12	2	
UKM 825 30 HDG	250	3000	7.42	2	
UKM 830 30 HDG	300	3000	7.73	2	
UKM 840 30 HDG	400	3000	8.34	2	
UKM 845 30 HDG	450	3000	8.65	2	
UKM 850 30 HDG	500	3000	8.95	2	
UKM 860 30 HDG	600	3000	9.57	2	
UKM 870 30 HDG	700	3000	10.18	2	
UKM 875 30 HDG	750	3000	10.48	2	
UKM 880 30 HDG	800	3000	10.79	2	
UKM 890 30 HDG	900	3000	11.40	2	
UKM 800 30 HDG	1000	3000	12.02	2	
UKM 802 30 HDG	1200	3000	13.24	2	

UKM H80 HDG (L3000)

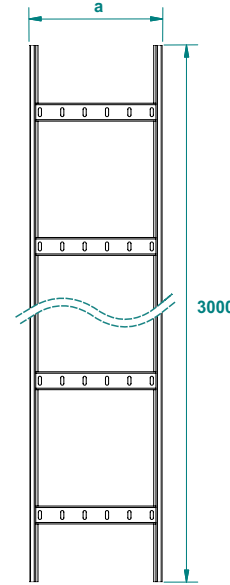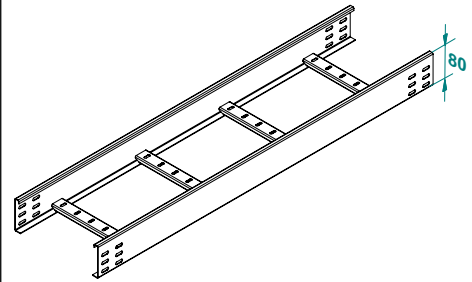


Width	Cross Section
100	83
150	125,5
200	168
300	253
400	338
500	423
600	508
750	635,5
900	763
1000	848
1200	1018

RUNG OF UKM

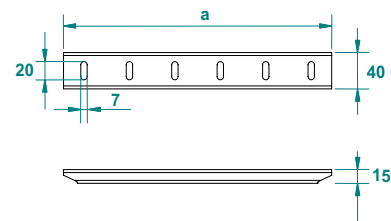

Fixing Unit for Cable Ladder


Merdiveni Sabitleme Elemanı - Фиксатор кабельлесты, боковой

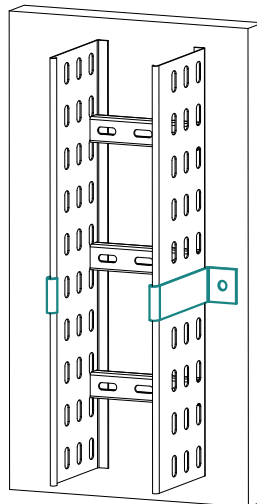

Hot-Dip Galvanized

MT/2 ... H100				1.5mm	
CODE	Height h mm	Fixing Hole D mm	kg 1m	pcs	
MT/2 80 HDG	85	11	0.11	100	

MT/2

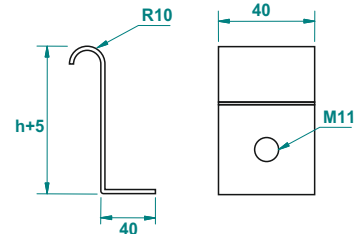

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: **1.5 2.0**


Cable Ladder Systems of Side Height 80



MTK
MADE IN TURKEY

Cable Ladder

Kablo Merdiveni UKM Serisi - Кабельлесты

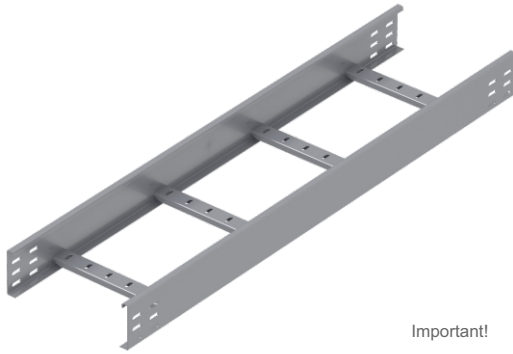

Important!


Joining cable ladder sections together only through the use of couplers 2 pcs for 1 length To install cable ladder-straight use Screw sets CFS M6 or CFS M8

Hot-Dip Galvanized

UKM ... H80					1.5mm				
CODE	Width a mm	Length L mm	KG 1m	pcs	CODE	Width a mm	Length L mm	KG 1m	pcs
UKM 810.60 15 HDG	100	6000	3.25	2	UKM 810.60 20 HDG	100	6000	4.34	2
UKM 815.60 15 HDG	150	6000	3.41	2	UKM 815.60 20 HDG	150	6000	4.54	2
UKM 820.60 15 HDG	200	6000	3.56	2	UKM 820.60 20 HDG	200	6000	4.75	2
UKM 825.60 15 HDG	250	6000	3.71	2	UKM 825.60 20 HDG	250	6000	4.95	2
UKM 830.60 15 HDG	300	6000	3.87	2	UKM 830.60 20 HDG	300	6000	5.15	2
UKM 840.60 15 HDG	400	6000	4.17	2	UKM 840.60 20 HDG	400	6000	5.56	2
UKM 845.60 15 HDG	450	6000	4.33	2	UKM 845.60 20 HDG	450	6000	5.77	2
UKM 850.60 15 HDG	500	6000	4.48	2	UKM 850.60 20 HDG	500	6000	5.97	2
UKM 860.60 15 HDG	600	6000	4.79	2	UKM 860.60 20 HDG	600	6000	6.38	2
UKM 870.60 15 HDG	700	6000	5.09	2	UKM 870.60 20 HDG	700	6000	6.79	2
UKM 875.60 15 HDG	750	6000	5.24	2	UKM 875.60 20 HDG	750	6000	6.99	2
UKM 880.60 15 HDG	800	6000	5.40	2	UKM 880.60 20 HDG	800	6000	7.20	2
UKM 890.60 15 HDG	900	6000	5.70	2	UKM 890.60 20 HDG	900	6000	7.60	2
UKM 800.60 15 HDG	1000	6000	6.01	2	UKM 800.60 20 HDG	1000	6000	8.01	2
UKM 802.60 15 HDG	1200	6000	6.62	2	UKM 802.60 20 HDG	1200	6000	8.83	2
					2.0mm				
CODE	Width a mm	Length L mm	KG 1m	pcs	CODE	Width a mm	Length L mm	KG 1m	pcs
UKM 810.60 25 HDG	100	6000	5.42	2	UKM 810.60 30 HDG	100	6000	6.50	2
UKM 815.60 25 HDG	150	6000	5.68	2	UKM 815.60 30 HDG	150	6000	6.81	2
UKM 820.60 25 HDG	200	6000	5.93	2	UKM 820.60 30 HDG	200	6000	7.12	2
UKM 825.60 25 HDG	250	6000	6.19	2	UKM 825.60 30 HDG	250	6000	7.42	2
UKM 830.60 25 HDG	300	6000	6.44	2	UKM 830.60 30 HDG	300	6000	7.73	2
UKM 840.60 25 HDG	400	6000	6.95	2	UKM 840.60 30 HDG	400	6000	8.34	2
UKM 845.60 25 HDG	450	6000	7.21	2	UKM 845.60 30 HDG	450	6000	8.65	2
UKM 850.60 25 HDG	500	6000	7.46	2	UKM 850.60 30 HDG	500	6000	8.95	2
UKM 860.60 25 HDG	600	6000	7.97	2	UKM 860.60 30 HDG	600	6000	9.57	2
UKM 870.60 25 HDG	700	6000	8.48	2	UKM 870.60 30 HDG	700	6000	10.18	2
UKM 875.60 25 HDG	750	6000	8.74	2	UKM 875.60 30 HDG	750	6000	10.48	2
UKM 880.60 25 HDG	800	6000	8.99	2	UKM 880.60 30 HDG	800	6000	10.79	2
UKM 890.60 25 HDG	900	6000	9.50	2	UKM 890.60 30 HDG	900	6000	11.40	2
UKM 800.60 25 HDG	1000	6000	10.01	2	UKM 800.60 30 HDG	1000	6000	12.02	2
UKM 802.60 25 HDG	1200	6000	11.03	2	UKM 802.60 30 HDG	1200	6000	13.24	2

Beam Fixing Unit For Cable Ladder (Set)


Merdiveni / Demire Sabitleme Elemanı (Takım) - Фиксатор кабельлесты на балку

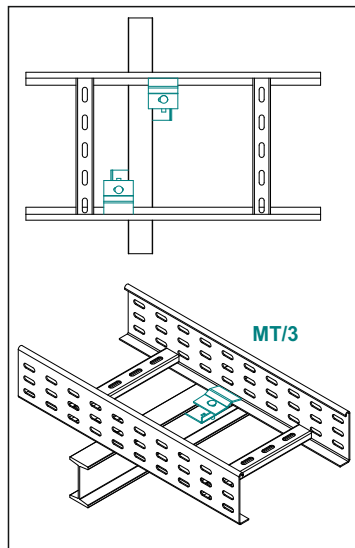


Stainless Steel - AISI 304L

MT/3					2.0mm				
CODE	Bolt Metric mm	Thickness T mm	KG ad/pc	pcs	CODE	Bolt Metric mm	Thickness T mm	KG ad/pc	pcs
MT/3 S4	M6x30	2,0	0,12	100					

UKM H80 HDG (L6000)

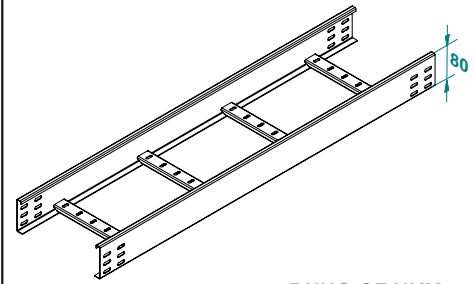


RUNG OF UKM

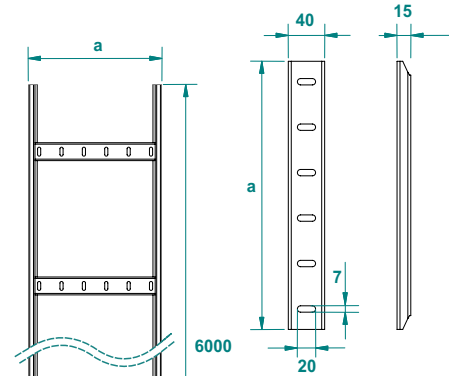

Width	Cross Section
100	83
150	125,5
200	168
300	253
400	338
500	423
600	508
750	635,5
900	763
1000	848
1200	1018

MT/3

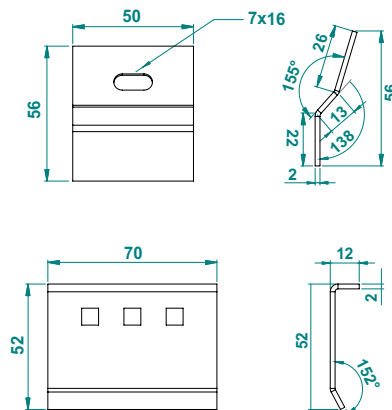

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)


Available finishes:

Steel, strip-galv. acc. to the Sendzimir method to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0

90° Horizontal Bend of Cable Ladder

90° Merdiven Yatay Dönüş Elemanı - Угол кабельроста горизонтальный 90°

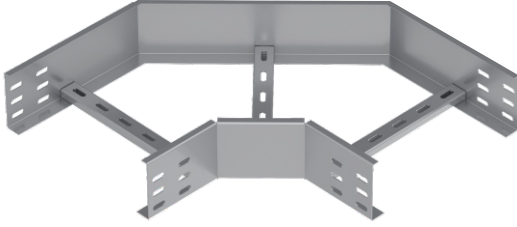

Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8


Hot-Dip Galvanized

M90... H80		1.5mm		
CODE	Width a=b mm	Radius R mm	KG 1m	pcs
M90 810 15 HDG	100	150	1.61	1
M90 815 15 HDG	150	150	1.87	1
M90 820 15 HDG	200	150	2.06	1
M90 825 15 HDG	250	150	2.32	1
M90 830 15 HDG	300	150	2.51	1
M90 840 15 HDG	400	150	3.03	1
M90 845 15 HDG	450	150	3.28	1
M90 850 15 HDG	500	150	3.48	1
M90 860 15 HDG	600	150	3.93	1
M90 870 15 HDG	700	150	4.39	1
M90 875 15 HDG	750	150	5.40	1
M90 880 15 HDG	800	150	5.70	1
M90 890 15 HDG	900	150	6.17	1
M90 800 15 HDG	1000	150	7.68	1
M90 802 15 HDG	1200	150	8.91	1

M90... H80		2.0mm		
CODE	Width a=b mm	Radius R mm	KG 1m	pcs
M90 810 20 HDG	100	150	2.14	1
M90 815 20 HDG	150	150	2.49	1
M90 820 20 HDG	200	150	2.74	1
M90 825 20 HDG	250	150	3.09	1
M90 830 20 HDG	300	150	3.34	1
M90 840 20 HDG	400	150	4.03	1
M90 845 20 HDG	450	150	4.38	1
M90 850 20 HDG	500	150	4.63	1
M90 860 20 HDG	600	150	5.23	1
M90 870 20 HDG	700	150	5.85	1
M90 875 20 HDG	750	150	7.20	1
M90 880 20 HDG	800	150	7.60	1
M90 890 20 HDG	900	150	8.22	1
M90 800 20 HDG	1000	150	10.23	1
M90 802 20 HDG	1200	150	11.87	1

90° Horizontal Bend of Cable Ladder Radius:300

90° Merdiven Yatay Dönüş Elemanı R:300 - Угол кабельроста горизонтальный 90° радиус:300

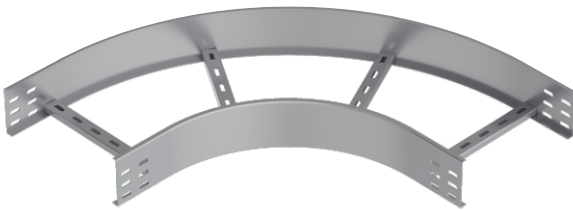

Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized



M90R2... H80		1.5mm		
CODE	Width a=b mm	Radius R mm	KG pc	pcs
M90R2 810 15 HDG	100	300	2.73	1
M90R2 815 15 HDG	150	300	3.03	1
M90R2 820 15 HDG	200	300	3.32	1
M90R2 825 15 HDG	250	300	3.62	1
M90R2 830 15 HDG	300	300	3.92	1
M90R2 840 15 HDG	400	300	4.52	1
M90R2 845 15 HDG	450	300	4.82	1
M90R2 850 15 HDG	500	300	5.12	1
M90R2 860 15 HDG	600	300	6.27	1
M90R2 870 15 HDG	700	300	6.96	1
M90R2 875 15 HDG	750	300	7.30	1
M90R2 880 15 HDG	800	300	7.65	1
M90R2 890 15 HDG	900	300	8.34	1
M90R2 800 15 HDG	1000	300	9.95	1
M90R2 802 15 HDG	1200	300	11.51	1

M90R2... H80		2.0mm		
CODE	Width a=b mm	Radius R mm	KG 1m	pcs
M90R2 810 20 HDG	100	300	3.63	1
M90R2 815 20 HDG	150	300	4.03	1
M90R2 820 20 HDG	200	300	4.43	1
M90R2 825 20 HDG	250	300	4.83	1
M90R2 830 20 HDG	300	300	5.23	1
M90R2 840 20 HDG	400	300	6.03	1
M90R2 845 20 HDG	450	300	6.43	1
M90R2 850 20 HDG	500	300	6.82	1
M90R2 860 20 HDG	600	300	8.36	1
M90R2 870 20 HDG	700	300	9.28	1
M90R2 875 20 HDG	750	300	9.74	1
M90R2 880 20 HDG	800	300	10.20	1
M90R2 890 20 HDG	900	300	11.12	1
M90R2 800 20 HDG	1000	300	13.26	1
M90R2 802 20 HDG	1200	300	15.35	1

M90 H80 HDG

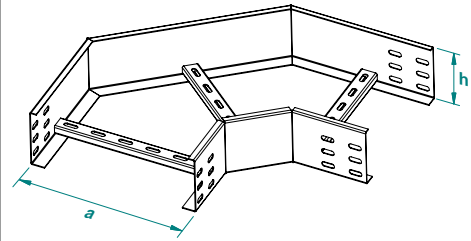

M90R2 H80 HDG

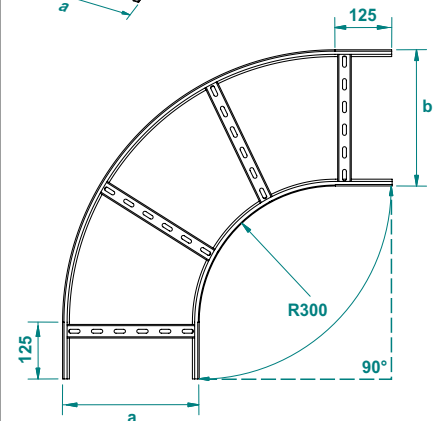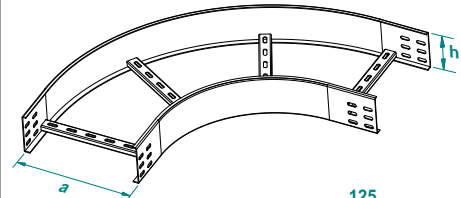

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method

to TS-EN 10346:2011 (PG)


SS- stainless steel AISI 304L and AISI 316L (SS)

EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: **1.5 2.0**

90° Horizontal Bend of Cable Ladder Radius:450

90° Merdiven Yatay Dönüş Elemanı R:450 - Угол кабельроста горизонтальный 90° радиус:450

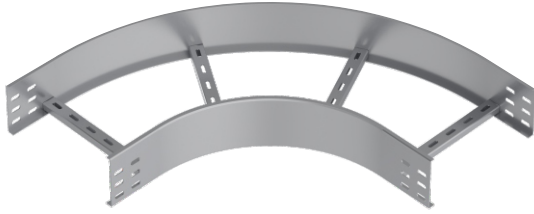

Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8


Hot-Dip Galvanized

M90R3... H80		1.5mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
M90R3 810 15 HDG	100	450	3.42	1	
M90R3 815 15 HDG	150	450	3.72	1	
M90R3 820 15 HDG	200	450	4.02	1	
M90R3 825 15 HDG	250	450	4.55	1	
M90R3 830 15 HDG	300	450	4.89	1	
M90R3 840 15 HDG	400	450	5.58	1	
M90R3 845 15 HDG	450	450	5.93	1	
M90R3 850 15 HDG	500	450	6.27	1	
M90R3 860 15 HDG	600	450	6.96	1	
M90R3 870 15 HDG	700	450	8.30	1	
M90R3 875 15 HDG	750	450	8.69	1	
M90R3 880 15 HDG	800	450	9.08	1	
M90R3 890 15 HDG	900	450	9.86	1	
M90R3 800 15 HDG	1000	450	10.64	1	
M90R3 802 15 HDG	1200	450	13.31	1	

M90R3... H80		2.0mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
M90R3 810 20 HDG	100	450	4.56	1	
M90R3 815 20 HDG	150	450	4.96	1	
M90R3 820 20 HDG	200	450	5.36	1	
M90R3 825 20 HDG	250	450	6.06	1	
M90R3 830 20 HDG	300	450	6.52	1	
M90R3 840 20 HDG	400	450	7.44	1	
M90R3 845 20 HDG	450	450	7.90	1	
M90R3 850 20 HDG	500	450	8.36	1	
M90R3 860 20 HDG	600	450	9.28	1	
M90R3 870 20 HDG	700	450	11.06	1	
M90R3 875 20 HDG	750	450	11.58	1	
M90R3 880 20 HDG	800	450	12.10	1	
M90R3 890 20 HDG	900	450	13.15	1	
M90R3 800 20 HDG	1000	450	14.19	1	
M90R3 802 20 HDG	1200	450	17.74	1	

90° Horizontal Bend of Cable Ladder Radius:600

90° Merdiven Yatay Dönüş Elemanı R:600 - Угол кабельроста горизонтальный 90° радиус:600

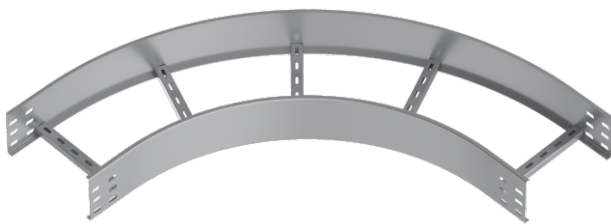

Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized



M90R4... H80		1.5mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
M90R4 810 15 HDG	100	600	4.20	1	
M90R4 815 15 HDG	150	600	4.55	1	
M90R4 820 15 HDG	200	600	4.89	1	
M90R4 825 15 HDG	250	600	5.24	1	
M90R4 830 15 HDG	300	600	5.58	1	
M90R4 840 15 HDG	400	600	6.64	1	
M90R4 845 15 HDG	450	600	7.03	1	
M90R4 850 15 HDG	500	600	7.42	1	
M90R4 860 15 HDG	600	600	8.21	1	
M90R4 870 15 HDG	700	600	8.99	1	
M90R4 875 15 HDG	750	600	10.07	1	
M90R4 880 15 HDG	800	600	10.51	1	
M90R4 890 15 HDG	900	600	11.38	1	
M90R4 800 15 HDG	1000	600	12.25	1	
M90R4 802 15 HDG	1200	600	15.10	1	

M90R4... H80		2.0mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
M90R4 810 20 HDG	100	600	5.60	1	
M90R4 815 20 HDG	150	600	6.06	1	
M90R4 820 20 HDG	200	600	6.52	1	
M90R4 825 20 HDG	250	600	6.98	1	
M90R4 830 20 HDG	300	600	7.44	1	
M90R4 840 20 HDG	400	600	8.86	1	
M90R4 845 20 HDG	450	600	9.38	1	
M90R4 850 20 HDG	500	600	9.90	1	
M90R4 860 20 HDG	600	600	10.94	1	
M90R4 870 20 HDG	700	600	11.98	1	
M90R4 875 20 HDG	750	600	13.42	1	
M90R4 880 20 HDG	800	600	14.01	1	
M90R4 890 20 HDG	900	600	15.17	1	
M90R4 800 20 HDG	1000	600	16.34	1	
M90R4 802 20 HDG	1200	600	20.14	1	

M90R3 H80 HDG

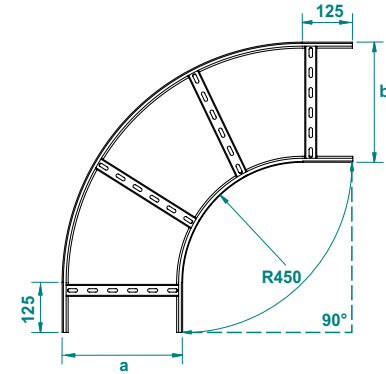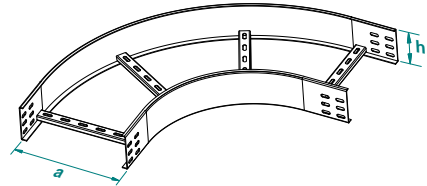

M90R4 H80 HDG

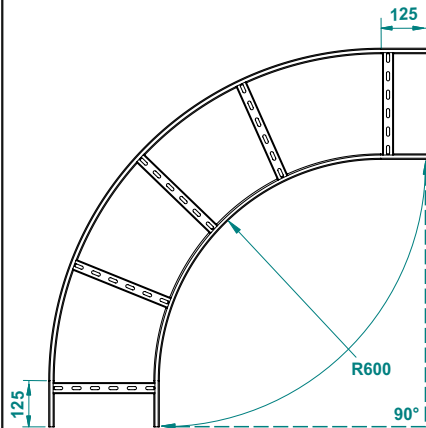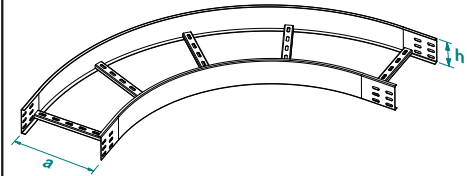

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)


Available finishes:

Steel, strip-galv. acc. to the Sendzimir method to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0

60° Horizontal Bend of Cable Ladder

60° Merdiven Yatay Dönüş Elemanı - Угол кабельроста горизонтальный 60°

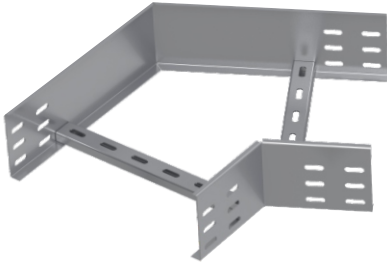

Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8


Hot-Dip Galvanized

M60... H80		1.5mm	
CODE	Width a=b mm	Radius R mm	kg 1pc
M60 810 15 HDG	100	150	1.39
M60 815 15 HDG	150	150	1.54
M60 820 15 HDG	200	150	1.70
M60 825 15 HDG	250	150	1.85
M60 830 15 HDG	300	150	2.00
M60 840 15 HDG	400	150	2.31
M60 845 15 HDG	450	150	2.46
M60 850 15 HDG	500	150	2.62
M60 860 15 HDG	600	150	3.42
M60 870 15 HDG	700	150	3.81
M60 875 15 HDG	750	150	4.00
M60 880 15 HDG	800	150	4.19
M60 890 15 HDG	900	150	4.58
M60 800 15 HDG	1000	150	5.96
M60 802 15 HDG	1200	150	6.90

M60... H80		2.0mm	
CODE	Width a=b mm	Radius R mm	kg 1pc
M60 810 20 HDG	100	150	1.85
M60 815 20 HDG	150	150	2.05
M60 820 20 HDG	200	150	2.26
M60 825 20 HDG	250	150	2.46
M60 830 20 HDG	300	150	2.67
M60 840 20 HDG	400	150	3.08
M60 845 20 HDG	450	150	3.28
M60 850 20 HDG	500	150	3.49
M60 860 20 HDG	600	150	4.55
M60 870 20 HDG	700	150	5.07
M60 875 20 HDG	750	150	5.33
M60 880 20 HDG	800	150	5.59
M60 890 20 HDG	900	150	6.11
M60 800 20 HDG	1000	150	7.95
M60 802 20 HDG	1200	150	9.20

60° Horizontal Bend of Cable Ladder Radius:300

60° Merdiven Yatay Dönüş Elemanı R:300 - Угол кабельроста горизонтальный 60° радиус:300

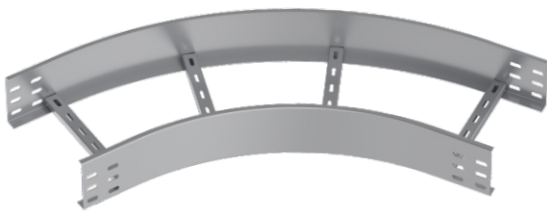

Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized



M60R2... H80		1.5mm	
CODE	Width a=b mm	Radius R mm	kg 1pc
M60R2 810 15 HDG	100	300	2.09
M60R2 815 15 HDG	150	300	2.31
M60R2 820 15 HDG	200	300	2.52
M60R2 825 15 HDG	250	300	2.74
M60R2 830 15 HDG	300	300	2.95
M60R2 840 15 HDG	400	300	3.38
M60R2 845 15 HDG	450	300	3.60
M60R2 850 15 HDG	500	300	3.81
M60R2 860 15 HDG	600	300	4.79
M60R2 870 15 HDG	700	300	5.32
M60R2 875 15 HDG	750	300	5.58
M60R2 880 15 HDG	800	300	5.84
M60R2 890 15 HDG	900	300	6.36
M60R2 800 15 HDG	1000	300	7.80
M60R2 802 15 HDG	1200	300	9.02

M60R2... H80		2.0mm	
CODE	Width a=b mm	Radius R mm	kg 1pc
M60R2 810 20 HDG	100	300	2.79
M60R2 815 20 HDG	150	300	3.08
M60R2 820 20 HDG	200	300	3.36
M60R2 825 20 HDG	250	300	3.65
M60R2 830 20 HDG	300	300	3.94
M60R2 840 20 HDG	400	300	4.51
M60R2 845 20 HDG	450	300	4.80
M60R2 850 20 HDG	500	300	5.08
M60R2 860 20 HDG	600	300	6.39
M60R2 870 20 HDG	700	300	7.09
M60R2 875 20 HDG	750	300	7.43
M60R2 880 20 HDG	800	300	7.78
M60R2 890 20 HDG	900	300	8.48
M60R2 800 20 HDG	1000	300	10.40
M60R2 802 20 HDG	1200	300	12.03

M60 H80 HDG

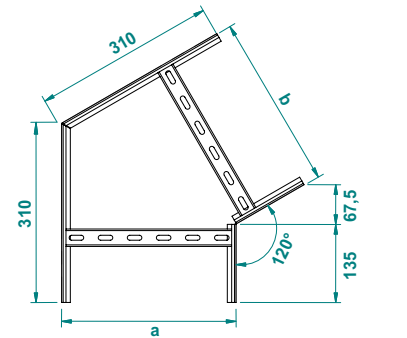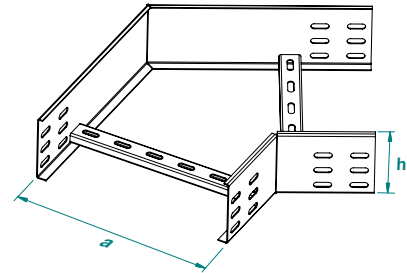

M60R2 H80 HDG

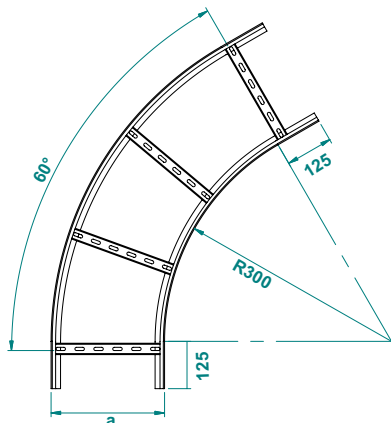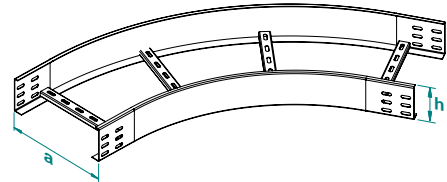

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method
to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0


Cable Ladder Systems of Side Height 80



MTK
MADE IN TURKEY

60° Horizontal Bend of Cable Ladder Radius:450

60° Merdiven Yatay Dönüş Elemanı R:450 - Угол кабельроста горизонтальный 60° радиус:450

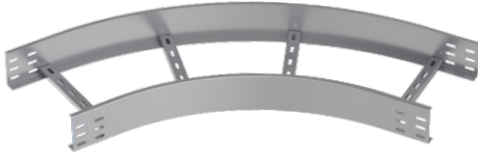

Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8


Hot-Dip Galvanized

M60R3... H80		1.5mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
M60R3 810 15 HDG	100	450	2.56	1	
M60R3 815 15 HDG	150	450	2.77	1	
M60R3 820 15 HDG	200	450	2.99	1	
M60R3 825 15 HDG	250	450	3.43	1	
M60R3 830 15 HDG	300	450	3.69	1	
M60R3 840 15 HDG	400	450	4.21	1	
M60R3 845 15 HDG	450	450	4.47	1	
M60R3 850 15 HDG	500	450	4.73	1	
M60R3 860 15 HDG	600	450	5.26	1	
M60R3 870 15 HDG	700	450	5.78	1	
M60R3 875 15 HDG	750	450	6.04	1	
M60R3 880 15 HDG	800	450	6.30	1	
M60R3 890 15 HDG	900	450	7.65	1	
M60R3 800 15 HDG	1000	450	8.26	1	
M60R3 802 15 HDG	1200	450	9.49	1	

M60R3... H80		2.0mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
M60R3 810 20 HDG	100	450	3.41	1	
M60R3 815 20 HDG	150	450	3.69	1	
M60R3 820 20 HDG	200	450	3.98	1	
M60R3 825 20 HDG	250	450	4.57	1	
M60R3 830 20 HDG	300	450	4.92	1	
M60R3 840 20 HDG	400	450	5.62	1	
M60R3 845 20 HDG	450	450	5.96	1	
M60R3 850 20 HDG	500	450	6.31	1	
M60R3 860 20 HDG	600	450	7.01	1	
M60R3 870 20 HDG	700	450	7.70	1	
M60R3 875 20 HDG	750	450	8.05	1	
M60R3 880 20 HDG	800	450	8.40	1	
M60R3 890 20 HDG	900	450	10.19	1	
M60R3 800 20 HDG	1000	450	11.01	1	
M60R3 802 20 HDG	1200	450	12.65	1	

60° Horizontal Bend of Cable Ladder Radius:600

60° Merdiven Yatay Dönüş Elemanı R:600 - Угол кабельроста горизонтальный 60° радиус:600

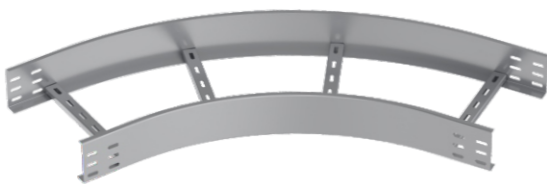

Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized



M60R4... H80		1.5mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
M60R4 810 15 HDG	100	600	3.11	1	
M60R4 815 15 HDG	150	600	3.37	1	
M60R4 820 15 HDG	200	600	3.63	1	
M60R4 825 15 HDG	250	600	3.89	1	
M60R4 830 15 HDG	300	600	4.15	1	
M60R4 840 15 HDG	400	600	4.68	1	
M60R4 845 15 HDG	450	600	4.94	1	
M60R4 850 15 HDG	500	600	5.20	1	
M60R4 860 15 HDG	600	600	6.27	1	
M60R4 870 15 HDG	700	600	6.88	1	
M60R4 875 15 HDG	750	600	7.19	1	
M60R4 880 15 HDG	800	600	7.50	1	
M60R4 890 15 HDG	900	600	8.11	1	
M60R4 800 15 HDG	1000	600	9.64	1	
M60R4 802 15 HDG	1200	600	11.05	1	

M60R4... H80		2.0mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
M60R4 810 20 HDG	100	600	4.15	1	
M60R4 815 20 HDG	150	600	4.49	1	
M60R4 820 20 HDG	200	600	4.84	1	
M60R4 825 20 HDG	250	600	5.19	1	
M60R4 830 20 HDG	300	600	5.54	1	
M60R4 840 20 HDG	400	600	6.23	1	
M60R4 845 20 HDG	450	600	6.58	1	
M60R4 850 20 HDG	500	600	6.93	1	
M60R4 860 20 HDG	600	600	8.36	1	
M60R4 870 20 HDG	700	600	9.18	1	
M60R4 875 20 HDG	750	600	9.58	1	
M60R4 880 20 HDG	800	600	9.99	1	
M60R4 890 20 HDG	900	600	10.81	1	
M60R4 800 20 HDG	1000	600	12.85	1	
M60R4 802 20 HDG	1200	600	14.73	1	

M60R3 H80 HDG

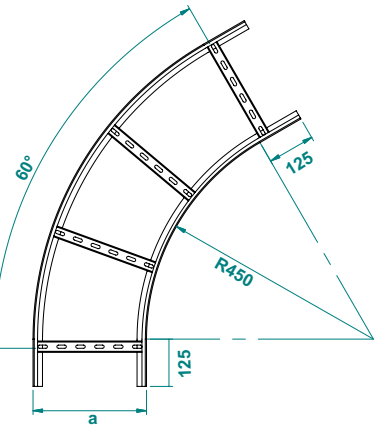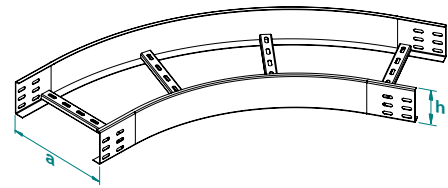

M60R4 H80 HDG

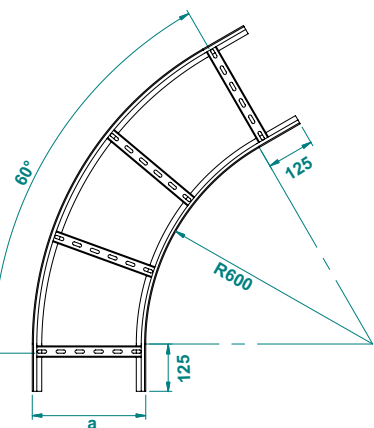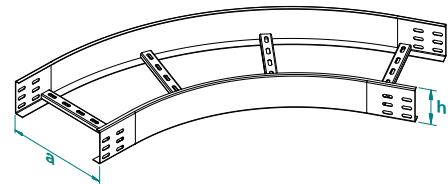

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method

to TS-EN 10346:2011 (PG)


SS- stainless steel AISI 304L and AISI 316L (SS)

EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0

45° Horizontal Bend of Cable Ladder

45° Merdiven Yatay Dönüş Elemanı - Угол кабельроста горизонтальный 45°

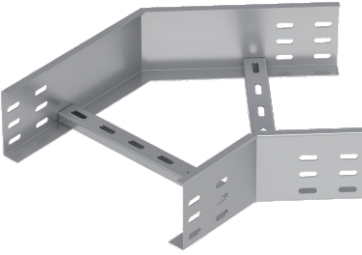

Hot-Dip Galvanized

M45... H80		1.5mm			
CODE	Width a=b mm	Radius R mm	KG 1pc	pcs	
M45 810 15 HDG	100	150	1.01	1	
M45 815 15 HDG	150	150	1.16	1	
M45 820 15 HDG	200	150	1.30	1	
M45 825 15 HDG	250	150	1.43	1	
M45 830 15 HDG	300	150	1.57	1	
M45 840 15 HDG	400	150	1.84	1	
M45 845 15 HDG	450	150	1.99	1	
M45 850 15 HDG	500	150	2.13	1	
M45 860 15 HDG	600	150	2.48	1	
M45 870 15 HDG	700	150	2.70	1	
M45 875 15 HDG	750	150	2.87	1	
M45 880 15 HDG	800	150	3.00	1	
M45 890 15 HDG	900	150	3.25	1	
M45 800 15 HDG	1000	150	4.45	1	
M45 802 15 HDG	1200	150	5.17	1	


Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

M45... H80		2.0mm			
CODE	Width a=b mm	Radius R mm	KG 1pc	pcs	
M45 810 20 HDG	100	150	1.34	1	
M45 815 20 HDG	150	150	1.54	1	
M45 820 20 HDG	200	150	1.73	1	
M45 825 20 HDG	250	150	1.91	1	
M45 830 20 HDG	300	150	2.09	1	
M45 840 20 HDG	400	150	2.45	1	
M45 845 20 HDG	450	150	2.66	1	
M45 850 20 HDG	500	150	2.84	1	
M45 860 20 HDG	600	150	3.31	1	
M45 870 20 HDG	700	150	3.60	1	
M45 875 20 HDG	750	150	3.82	1	
M45 880 20 HDG	800	150	4.00	1	
M45 890 20 HDG	900	150	4.33	1	
M45 800 20 HDG	1000	150	5.94	1	
M45 802 20 HDG	1200	150	6.89	1	

45° Horizontal Bend of Cable Ladder

45° Merdiven Yatay Dönüş Elemanı - Угол кабельроста горизонтальный 45°

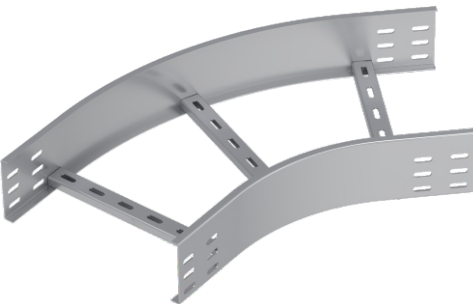

Hot-Dip Galvanized



M45R2... H80		1.5mm			
CODE	Width a=b mm	Radius R mm	KG 1pc	pcs	
M45R2 810 15 HDG	100	300	1.73	1	
M45R2 815 15 HDG	150	300	1.88	1	
M45R2 820 15 HDG	200	300	2.22	1	
M45R2 825 15 HDG	250	300	2.41	1	
M45R2 830 15 HDG	300	300	2.61	1	
M45R2 840 15 HDG	400	300	3.00	1	
M45R2 845 15 HDG	450	300	3.19	1	
M45R2 850 15 HDG	500	300	3.39	1	
M45R2 860 15 HDG	600	300	3.78	1	
M45R2 870 15 HDG	700	300	4.17	1	
M45R2 875 15 HDG	750	300	4.37	1	
M45R2 880 15 HDG	800	300	4.56	1	
M45R2 890 15 HDG	900	300	4.95	1	
M45R2 800 15 HDG	1000	300	6.26	1	
M45R2 802 15 HDG	1200	300	7.23	1	

Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

M45R2... H80		2.0mm			
CODE	Width a=b mm	Radius R mm	KG 1pc	pcs	
M45R2 810 20 HDG	100	300	2.31	1	
M45R2 815 20 HDG	150	300	2.51	1	
M45R2 820 20 HDG	200	300	2.95	1	
M45R2 825 20 HDG	250	300	3.21	1	
M45R2 830 20 HDG	300	300	3.47	1	
M45R2 840 20 HDG	400	300	4.00	1	
M45R2 845 20 HDG	450	300	4.26	1	
M45R2 850 20 HDG	500	300	4.52	1	
M45R2 860 20 HDG	600	300	5.04	1	
M45R2 870 20 HDG	700	300	5.56	1	
M45R2 875 20 HDG	750	300	5.82	1	
M45R2 880 20 HDG	800	300	6.08	1	
M45R2 890 20 HDG	900	300	6.60	1	
M45R2 800 20 HDG	1000	300	8.35	1	
M45R2 802 20 HDG	1200	300	9.64	1	

M45 H80 HDG

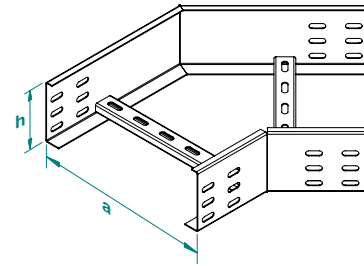

M45R2 H80 HDG

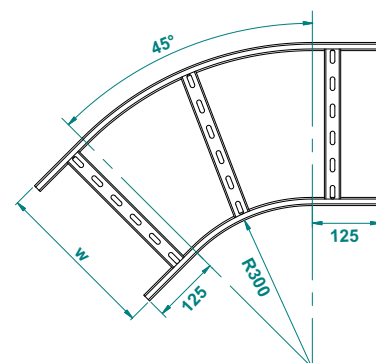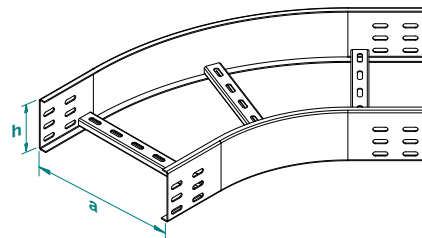

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0


Cable Ladder Systems of Side Height 80



MTK
MADE IN TURKEY

45° Horizontal Bend of Cable Ladder Radius:450

45° Merdiven Yatay Dönüş Elemanı R:450 - Угол кабельроста горизонтальный 45° радиус:450

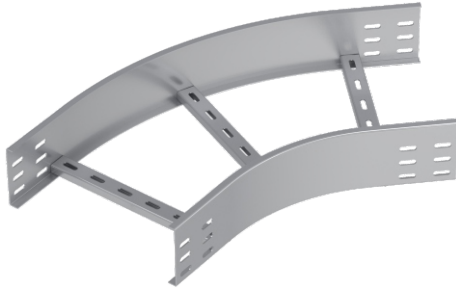

Important!


To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized

M45R3... H80					M45R3... H80				
1.5mm					2.0mm				
CODE	Width a=b mm	Radius R mm	KG 1pc	pcs	CODE	Width a=b mm	Radius R mm	KG 1pc	pcs
M45R3 810 15 HDG	100	450	2.17	1	M45R3 810 20 HDG	100	450	2.89	1
M45R3 815 15 HDG	150	450	2.37	1	M45R3 815 20 HDG	150	450	3.15	1
M45R3 820 15 HDG	200	450	2.56	1	M45R3 820 20 HDG	200	450	3.42	1
M45R3 825 15 HDG	250	450	2.76	1	M45R3 825 20 HDG	250	450	3.68	1
M45R3 830 15 HDG	300	450	2.95	1	M45R3 830 20 HDG	300	450	3.94	1
M45R3 840 15 HDG	400	450	3.35	1	M45R3 840 20 HDG	400	450	4.46	1
M45R3 845 15 HDG	450	450	3.54	1	M45R3 845 20 HDG	450	450	4.72	1
M45R3 850 15 HDG	500	450	3.74	1	M45R3 850 20 HDG	500	450	4.98	1
M45R3 860 15 HDG	600	450	4.13	1	M45R3 860 20 HDG	600	450	5.50	1
M45R3 870 15 HDG	700	450	5.16	1	M45R3 870 20 HDG	700	450	6.88	1
M45R3 875 15 HDG	750	450	5.40	1	M45R3 875 20 HDG	750	450	7.20	1
M45R3 880 15 HDG	800	450	5.64	1	M45R3 880 20 HDG	800	450	7.52	1
M45R3 890 15 HDG	900	450	6.13	1	M45R3 890 20 HDG	900	450	8.17	1
M45R3 800 15 HDG	1000	450	6.61	1	M45R3 800 20 HDG	1000	450	8.81	1
M45R3 802 15 HDG	1200	450	7.58	1	M45R3 802 20 HDG	1200	450	10.10	1

45° Horizontal Bend of Cable Ladder Radius:600

45° Merdiven Yatay Dönüş Elemanı R:600 - Угол кабельроста горизонтальный 45° радиус:600

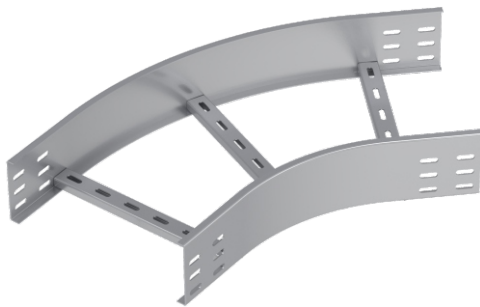



Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8



Hot-Dip Galvanized

M45R4... H80					M45R4... H80				
1.5mm					2.0mm				
CODE	Width a=b mm	Radius R mm	KG 1pc	pcs	CODE	Width a=b mm	Radius R mm	KG 1pc	pcs
M45R4 810 15 HDG	100	600	2.52	1	M45R4 810 20 HDG	100	600	3.36	1
M45R4 815 15 HDG	150	600	2.71	1	M45R4 815 20 HDG	150	600	3.62	1
M45R4 820 15 HDG	200	600	2.91	1	M45R4 820 20 HDG	200	600	3.88	1
M45R4 825 15 HDG	250	600	3.11	1	M45R4 825 20 HDG	250	600	4.14	1
M45R4 830 15 HDG	300	600	3.30	1	M45R4 830 20 HDG	300	600	4.40	1
M45R4 840 15 HDG	400	600	4.06	1	M45R4 840 20 HDG	400	600	5.41	1
M45R4 845 15 HDG	450	600	4.30	1	M45R4 845 20 HDG	450	600	5.73	1
M45R4 850 15 HDG	500	600	4.54	1	M45R4 850 20 HDG	500	600	6.05	1
M45R4 860 15 HDG	600	600	5.02	1	M45R4 860 20 HDG	600	600	6.70	1
M45R4 870 15 HDG	700	600	5.51	1	M45R4 870 20 HDG	700	600	7.34	1
M45R4 875 15 HDG	750	600	5.75	1	M45R4 875 20 HDG	750	600	7.66	1
M45R4 880 15 HDG	800	600	5.99	1	M45R4 880 20 HDG	800	600	7.99	1
M45R4 890 15 HDG	900	600	6.47	1	M45R4 890 20 HDG	900	600	8.63	1
M45R4 800 15 HDG	1000	600	7.88	1	M45R4 800 20 HDG	1000	600	10.50	1
M45R4 802 15 HDG	1200	600	9.02	1	M45R4 802 20 HDG	1200	600	12.03	1

M45R3 H80 HDG

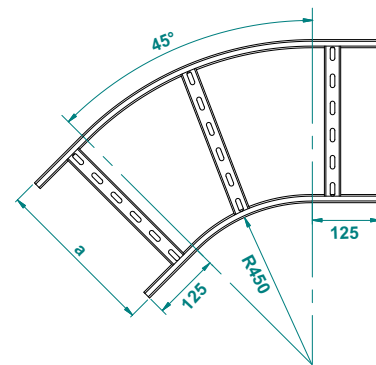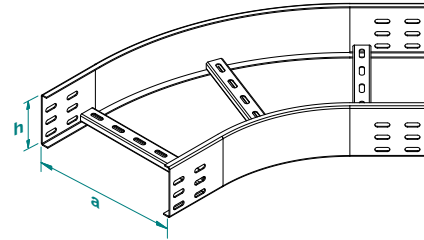

M45R4 H80 HDG

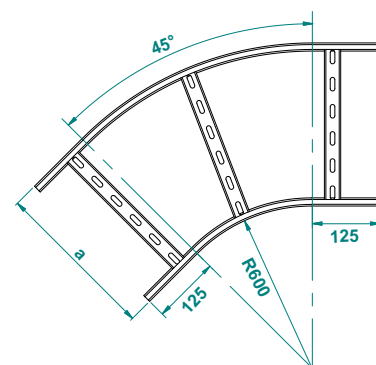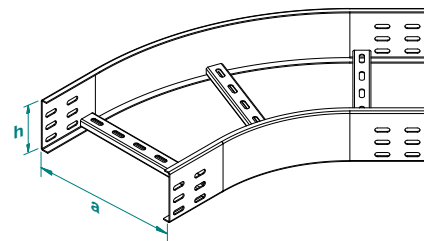

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method
to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: **1.5 2.0**


Cable Ladder Systems of Side Height 80



MTK
MADE IN TURKEY

30° Horizontal Bend of Cable Ladder

30° Merdiven Yatay Dönüş Elemanı - Угол кабельроста горизонтальный 30°

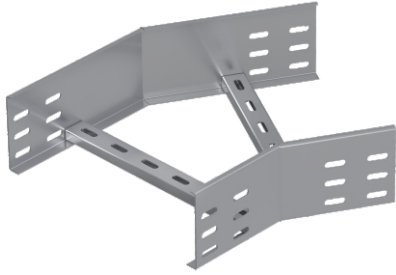

Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized

M30... H80		1.5mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
M30 810 15 HDG	100	150	0.97	1	
M30 815 15 HDG	150	150	1.09	1	
M30 820 15 HDG	200	150	1.20	1	
M30 825 15 HDG	250	150	1.32	1	
M30 830 15 HDG	300	150	1.45	1	
M30 840 15 HDG	400	150	1.68	1	
M30 845 15 HDG	450	150	1.80	1	
M30 850 15 HDG	500	150	1.91	1	
M30 860 15 HDG	600	150	2.15	1	
M30 870 15 HDG	700	150	2.39	1	
M30 875 15 HDG	750	150	2.50	1	
M30 880 15 HDG	800	150	2.62	1	
M30 890 15 HDG	900	150	2.86	1	
M30 800 15 HDG	1000	150	3.09	1	
M30 802 15 HDG	1200	150	3.57	1	

M30... H80		2.0mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
M30 810 20 HDG	100	150	1.29	1	
M30 815 20 HDG	150	150	1.45	1	
M30 820 20 HDG	200	150	1.60	1	
M30 825 20 HDG	250	150	1.76	1	
M30 830 20 HDG	300	150	1.93	1	
M30 840 20 HDG	400	150	2.24	1	
M30 845 20 HDG	450	150	2.40	1	
M30 850 20 HDG	500	150	2.55	1	
M30 860 20 HDG	600	150	2.86	1	
M30 870 20 HDG	700	150	3.19	1	
M30 875 20 HDG	750	150	3.33	1	
M30 880 20 HDG	800	150	3.50	1	
M30 890 20 HDG	900	150	3.81	1	
M30 800 20 HDG	1000	150	4.12	1	
M30 802 20 HDG	1200	150	4.76	1	

30° Horizontal Bend of Cable Ladder Radius:300

30° Merdiven Yatay Dönüş Elemanı R:300 - Угол кабельроста горизонтальный 30° радиус:300



Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized



M30R2... H80		1.5mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
M30R2 810 15 HDG	100	300	1.46	1	
M30R2 815 15 HDG	150	300	1.59	1	
M30R2 820 15 HDG	200	300	1.72	1	
M30R2 825 15 HDG	250	300	1.85	1	
M30R2 830 15 HDG	300	300	1.99	1	
M30R2 840 15 HDG	400	300	2.25	1	
M30R2 845 15 HDG	450	300	2.38	1	
M30R2 850 15 HDG	500	300	2.51	1	
M30R2 860 15 HDG	600	300	3.32	1	
M30R2 870 15 HDG	700	300	3.67	1	
M30R2 875 15 HDG	750	300	3.85	1	
M30R2 880 15 HDG	800	300	4.02	1	
M30R2 890 15 HDG	900	300	4.38	1	
M30R2 800 15 HDG	1000	300	4.73	1	
M30R2 802 15 HDG	1200	300	5.43	1	

M30R2... H80		2.0mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
M30R2 810 20 HDG	100	300	1.95	1	
M30R2 815 20 HDG	150	300	2.12	1	
M30R2 820 20 HDG	200	300	2.30	1	
M30R2 825 20 HDG	250	300	2.47	1	
M30R2 830 20 HDG	300	300	2.65	1	
M30R2 840 20 HDG	400	300	2.99	1	
M30R2 845 20 HDG	450	300	3.17	1	
M30R2 850 20 HDG	500	300	3.34	1	
M30R2 860 20 HDG	600	300	4.42	1	
M30R2 870 20 HDG	700	300	4.89	1	
M30R2 875 20 HDG	750	300	5.13	1	
M30R2 880 20 HDG	800	300	5.36	1	
M30R2 890 20 HDG	900	300	5.83	1	
M30R2 800 20 HDG	1000	300	6.30	1	
M30R2 802 20 HDG	1200	300	7.24	1	

M30 H80 HDG

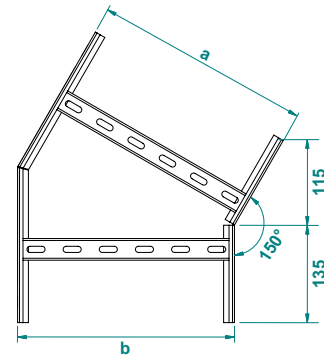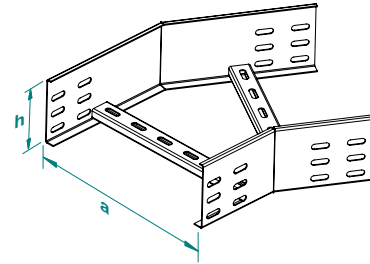

M30R2 H80 HDG

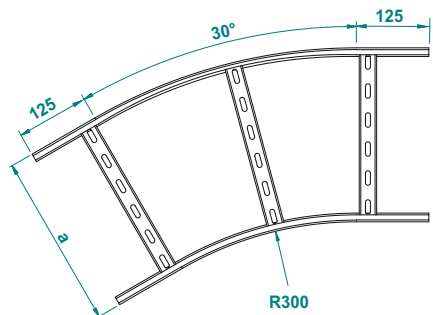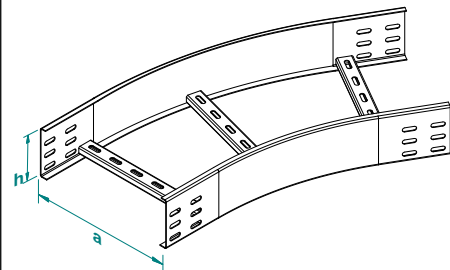

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0

Cable Ladder Systems of Side Height 80



MTK
MADE IN TURKEY

30° Horizontal Bend of Cable Ladder Radius:450

30° Merdiven Yatay Dönüş Elemanı R:450 - Угол кабельроста горизонтальный 30° радиус:450



Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8


Hot-Dip Galvanized

M30R3... H80		1.5mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
M30R3 810 15 HDG	100	450	1.69	1	
M30R3 815 15 HDG	150	450	1.83	1	
M30R3 820 15 HDG	200	450	1.96	1	
M30R3 825 15 HDG	250	450	2.32	1	
M30R3 830 15 HDG	300	450	2.49	1	
M30R3 840 15 HDG	400	450	2.84	1	
M30R3 845 15 HDG	450	450	3.02	1	
M30R3 850 15 HDG	500	450	3.20	1	
M30R3 860 15 HDG	600	450	3.55	1	
M30R3 870 15 HDG	700	450	3.90	1	
M30R3 875 15 HDG	750	450	4.08	1	
M30R3 880 15 HDG	800	450	4.25	1	
M30R3 890 15 HDG	900	450	4.61	1	
M30R3 800 15 HDG	1000	450	4.96	1	
M30R3 802 15 HDG	1200	450	5.66	1	

M30R3... H80		2.0mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
M30R3 810 20 HDG	100	450	2.26	1	
M30R3 815 20 HDG	150	450	2.43	1	
M30R3 820 20 HDG	200	450	2.61	1	
M30R3 825 20 HDG	250	450	3.09	1	
M30R3 830 20 HDG	300	450	3.32	1	
M30R3 840 20 HDG	400	450	3.79	1	
M30R3 845 20 HDG	450	450	4.03	1	
M30R3 850 20 HDG	500	450	4.26	1	
M30R3 860 20 HDG	600	450	4.73	1	
M30R3 870 20 HDG	700	450	5.20	1	
M30R3 875 20 HDG	750	450	5.44	1	
M30R3 880 20 HDG	800	450	5.67	1	
M30R3 890 20 HDG	900	450	6.14	1	
M30R3 800 20 HDG	1000	450	6.61	1	
M30R3 802 20 HDG	1200	450	7.55	1	

30° Horizontal Bend of Cable Ladder Radius:600

30° Merdiven Yatay Dönüş Elemanı R:600 - Угол кабельроста горизонтальный 30° радиус:600

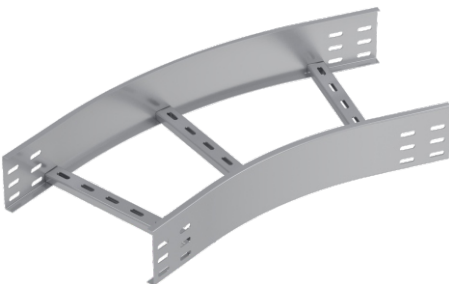

Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized



M30R4... H80		1.5mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
M30R4 810 15 HDG	100	600	2.02	1	
M30R4 815 15 HDG	150	600	2.19	1	
M30R4 820 15 HDG	200	600	2.37	1	
M30R4 825 15 HDG	250	600	2.55	1	
M30R4 830 15 HDG	300	600	2.72	1	
M30R4 840 15 HDG	400	600	3.08	1	
M30R4 845 15 HDG	450	600	3.25	1	
M30R4 850 15 HDG	500	600	3.43	1	
M30R4 860 15 HDG	600	600	3.78	1	
M30R4 870 15 HDG	700	600	4.13	1	
M30R4 875 15 HDG	750	600	4.31	1	
M30R4 880 15 HDG	800	600	4.49	1	
M30R4 890 15 HDG	900	600	4.84	1	
M30R4 800 15 HDG	1000	600	5.19	1	
M30R4 802 15 HDG	1200	600	7.00	1	

M30R4... H80		2.0mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
M30R4 810 20 HDG	100	600	2.69	1	
M30R4 815 20 HDG	150	600	2.92	1	
M30R4 820 20 HDG	200	600	3.16	1	
M30R4 825 20 HDG	250	600	3.39	1	
M30R4 830 20 HDG	300	600	3.63	1	
M30R4 840 20 HDG	400	600	4.10	1	
M30R4 845 20 HDG	450	600	4.33	1	
M30R4 850 20 HDG	500	600	4.57	1	
M30R4 860 20 HDG	600	600	5.04	1	
M30R4 870 20 HDG	700	600	5.51	1	
M30R4 875 20 HDG	750	600	5.74	1	
M30R4 880 20 HDG	800	600	5.98	1	
M30R4 890 20 HDG	900	600	6.45	1	
M30R4 800 20 HDG	1000	600	6.92	1	
M30R4 802 20 HDG	1200	600	9.33	1	

M30R3 H80 HDG

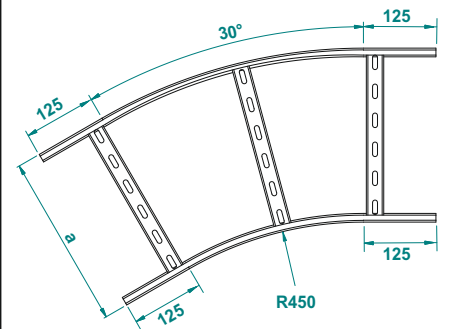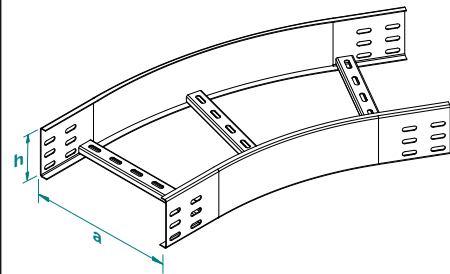

M30R4 H80 HDG

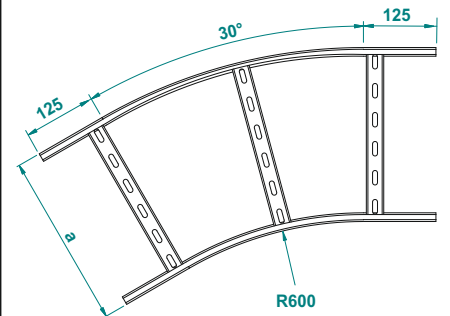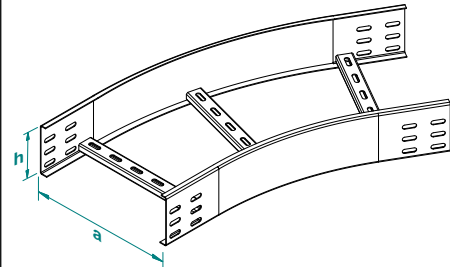

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method
to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0


Cable Ladder Systems of Side Height 80



MTK
MADE IN TURKEY

Tee Horizontal Bend of Cable Ladder

"T" Merdiven Yatay Dönüş Elemanı - T-отвод кабельроста горизонтальный

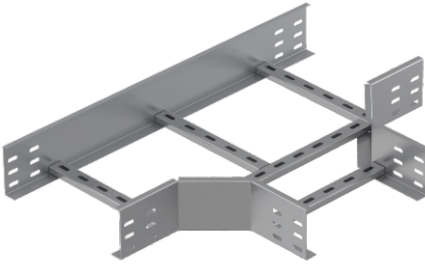

Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8


Hot-Dip Galvanized

MT... H80		1.5mm			
CODE	Width a=b=c mm	Radius R mm	kg 1pc	pcs	
MT 810 15 HDG	100	150	2.08	1	
MT 815 15 HDG	150	150	2.27	1	
MT 820 15 HDG	200	150	2.46	1	
MT 825 15 HDG	250	150	3.19	1	
MT 830 15 HDG	300	150	3.46	1	
MT 840 15 HDG	400	150	4.01	1	
MT 845 15 HDG	450	150	4.29	1	
MT 850 15 HDG	500	150	4.56	1	
MT 860 15 HDG	600	150	5.11	1	
MT 870 15 HDG	700	150	6.31	1	
MT 875 15 HDG	750	150	6.63	1	
MT 880 15 HDG	800	150	6.94	1	
MT 890 15 HDG	900	150	7.57	1	
MT 800 15 HDG	1000	150	9.11	1	
MT 802 15 HDG	1200	150	10.62	1	

MT... H80		2.0mm			
CODE	Width a=b=c mm	Radius R mm	kg 1pc	pcs	
MT 810 20 HDG	100	150	2.77	1	
MT 815 20 HDG	150	150	3.03	1	
MT 820 20 HDG	200	150	3.28	1	
MT 825 20 HDG	250	150	4.25	1	
MT 830 20 HDG	300	150	4.62	1	
MT 840 20 HDG	400	150	5.35	1	
MT 845 20 HDG	450	150	5.71	1	
MT 850 20 HDG	500	150	6.08	1	
MT 860 20 HDG	600	150	6.81	1	
MT 870 20 HDG	700	150	8.42	1	
MT 875 20 HDG	750	150	8.84	1	
MT 880 20 HDG	800	150	9.26	1	
MT 890 20 HDG	900	150	10.10	1	
MT 800 20 HDG	1000	150	12.15	1	
MT 802 20 HDG	1200	150	14.15	1	

Tee Horizontal Bend of Cable Ladder Radius:300

"T" Merdiven Yatay Dönüş Elemanı R:300 - T-отвод кабельроста горизонтальный радиус:300

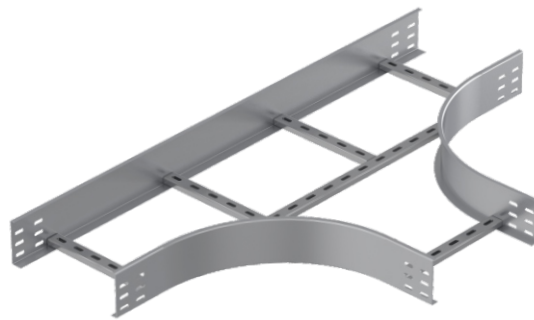

Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized



MTR2... H80		1.5mm			
CODE	Width a=b=c mm	Radius R mm	kg 1pc	pcs	
MTR2 810 15 HDG	100	300	4.55	1	
MTR2 815 15 HDG	150	300	4.99	1	
MTR2 820 15 HDG	200	300	5.43	1	
MTR2 825 15 HDG	250	300	5.64	1	
MTR2 830 15 HDG	300	300	5.99	1	
MTR2 840 15 HDG	400	300	6.73	1	
MTR2 845 15 HDG	450	300	7.08	1	
MTR2 850 15 HDG	500	300	7.43	1	
MTR2 860 15 HDG	600	300	8.87	1	
MTR2 870 15 HDG	700	300	9.75	1	
MTR2 875 15 HDG	750	300	10.14	1	
MTR2 880 15 HDG	800	300	10.54	1	
MTR2 890 15 HDG	900	300	11.33	1	
MTR2 800 15 HDG	1000	300	13.82	1	
MTR2 802 15 HDG	1200	300	15.58	1	

MTR2... H80		2.0mm			
CODE	Width a=b=c mm	Radius R mm	kg 1pc	pcs	
MTR2 810 20 HDG	100	300	6.06	1	
MTR2 815 20 HDG	150	300	6.65	1	
MTR2 820 20 HDG	200	300	7.24	1	
MTR2 825 20 HDG	250	300	7.52	1	
MTR2 830 20 HDG	300	300	7.99	1	
MTR2 840 20 HDG	400	300	8.98	1	
MTR2 845 20 HDG	450	300	9.44	1	
MTR2 850 20 HDG	500	300	9.91	1	
MTR2 860 20 HDG	600	300	11.82	1	
MTR2 870 20 HDG	700	300	13.00	1	
MTR2 875 20 HDG	750	300	13.52	1	
MTR2 880 20 HDG	800	300	14.05	1	
MTR2 890 20 HDG	900	300	15.10	1	
MTR2 800 20 HDG	1000	300	18.42	1	
MTR2 802 20 HDG	1200	300	20.77	1	

MT H80 HDG

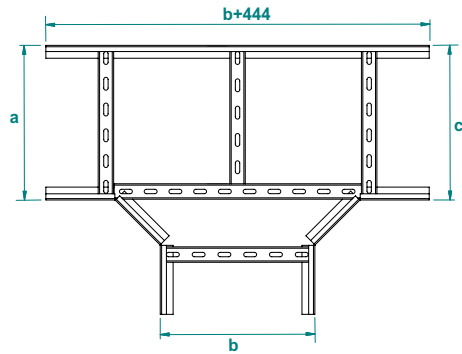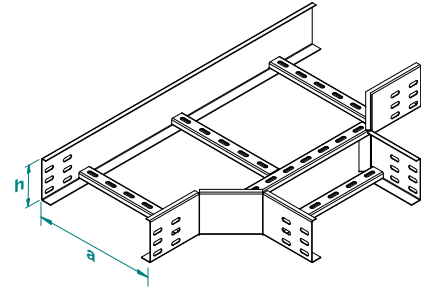

MTR2 H80 HDG

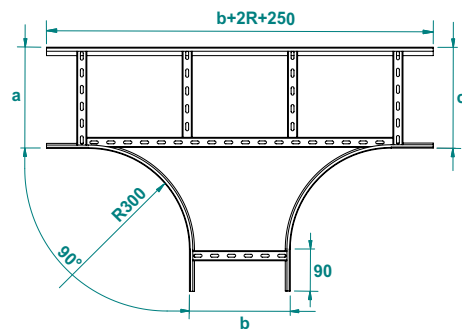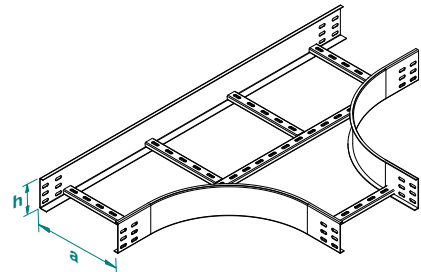

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0


Cable Ladder Systems of Side Height 80



MTK
MADE IN TURKEY

Tee Horizontal Bend of Cable Ladder Radius:450

"T" Merdiven Yatay Dönüş Elemanı R:450 - T-отвод кабельроста горизонтальный радиус:450

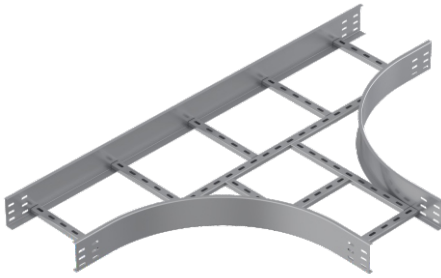

Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8


Hot-Dip Galvanized

MTR3... H80		1.5mm			
CODE	Width a=b=c mm	Radius R mm	kg 1pc	pcs	
MTR3 810 15 HDG	100	450	5.86	1	
MTR3 815 15 HDG	150	450	6.21	1	
MTR3 820 15 HDG	200	450	7.07	1	
MTR3 825 15 HDG	250	450	8.11	1	
MTR3 830 15 HDG	300	450	8.73	1	
MTR3 840 15 HDG	400	450	9.61	1	
MTR3 845 15 HDG	450	450	10.05	1	
MTR3 850 15 HDG	500	450	10.49	1	
MTR3 860 15 HDG	600	450	11.88	1	
MTR3 870 15 HDG	700	450	12.86	1	
MTR3 875 15 HDG	750	450	13.16	1	
MTR3 880 15 HDG	800	450	13.97	1	
MTR3 890 15 HDG	900	450	15.22	1	
MTR3 800 15 HDG	1000	450	17.02	1	
MTR3 802 15 HDG	1200	450	19.24	1	

MTR3... H80		2.0mm			
CODE	Width a=b=c mm	Radius R mm	kg 1pc	pcs	
MTR3 810 20 HDG	100	450	7.82	1	
MTR3 815 20 HDG	150	450	8.28	1	
MTR3 820 20 HDG	200	450	9.42	1	
MTR3 825 20 HDG	250	450	10.81	1	
MTR3 830 20 HDG	300	450	11.64	1	
MTR3 840 20 HDG	400	450	12.82	1	
MTR3 845 20 HDG	450	450	13.40	1	
MTR3 850 20 HDG	500	450	13.99	1	
MTR3 860 20 HDG	600	450	15.84	1	
MTR3 870 20 HDG	700	450	17.14	1	
MTR3 875 20 HDG	750	450	17.54	1	
MTR3 880 20 HDG	800	450	18.62	1	
MTR3 890 20 HDG	900	450	20.29	1	
MTR3 800 20 HDG	1000	450	22.69	1	
MTR3 802 20 HDG	1200	450	25.65	1	

Tee Horizontal Bend of Cable Ladder Radius:600

"T" Merdiven Yatay Dönüş Elemanı R:600 - T-отвод кабельроста горизонтальный радиус:600

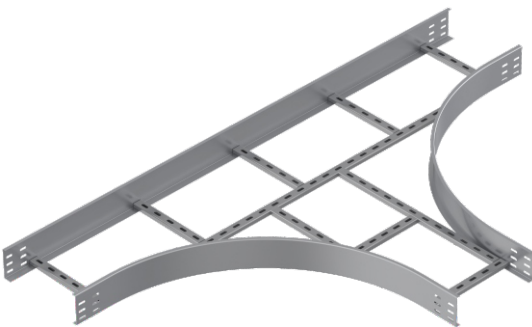

Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized



MTR4... H80		1.5mm			
CODE	Width a=b=c mm	Radius R mm	kg 1pc	pcs	
MTR4 810 15 HDG	100	600	7.46	1	
MTR4 815 15 HDG	150	600	8.72	1	
MTR4 820 15 HDG	200	600	9.17	1	
MTR4 825 15 HDG	250	600	9.59	1	
MTR4 830 15 HDG	300	600	10.42	1	
MTR4 840 15 HDG	400	600	11.62	1	
MTR4 845 15 HDG	450	600	12.11	1	
MTR4 850 15 HDG	500	600	12.59	1	
MTR4 860 15 HDG	600	600	13.57	1	
MTR4 870 15 HDG	700	600	14.54	1	
MTR4 875 15 HDG	750	600	15.03	1	
MTR4 880 15 HDG	800	600	16.11	1	
MTR4 890 15 HDG	900	600	17.82	1	
MTR4 800 15 HDG	1000	600	18.89	1	
MTR4 802 15 HDG	1200	600	21.02	1	

MTR4... H80		2.0mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
MTR4 810 20 HDG	100	600	9.94	1	
MTR4 815 20 HDG	150	600	11.63	1	
MTR4 820 20 HDG	200	600	12.22	1	
MTR4 825 20 HDG	250	600	12.78	1	
MTR4 830 20 HDG	300	600	13.89	1	
MTR4 840 20 HDG	400	600	15.49	1	
MTR4 845 20 HDG	450	600	16.14	1	
MTR4 850 20 HDG	500	600	16.79	1	
MTR4 860 20 HDG	600	600	18.09	1	
MTR4 870 20 HDG	700	600	19.39	1	
MTR4 875 20 HDG	750	600	20.03	1	
MTR4 880 20 HDG	800	600	21.48	1	
MTR4 890 20 HDG	900	600	23.76	1	
MTR4 800 20 HDG	1000	600	25.18	1	
MTR4 802 20 HDG	1200	600	28.02	1	

MTR3 H80 HDG

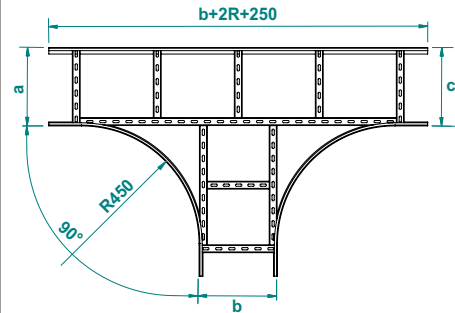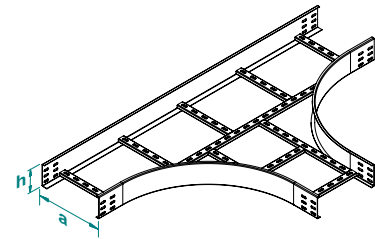

MTR4 H80 HDG

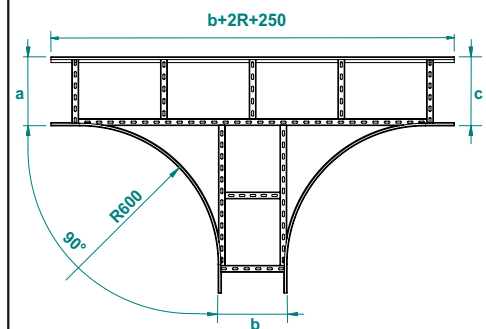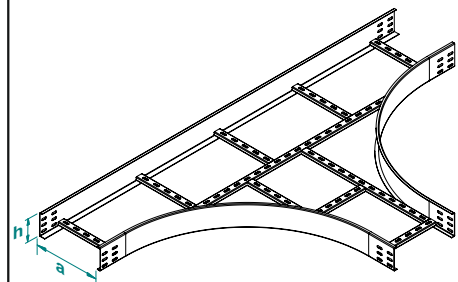

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method
to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0


Cable Ladder Systems of Side Height 80



MTK
MADE IN TURKEY

Cross Bend of Cable Ladder

Dörtlülü Merdiven Dönüş Elemanı - Крестовина кабельроста

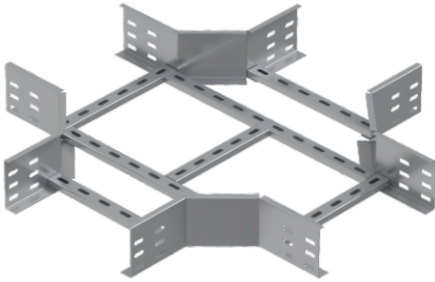

Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8


Hot-Dip Galvanized

MD... H80		1.5mm			
CODE	Width a=b=c=d mm	Radius R mm	kg 1pc	pcs	
MD 810 15 HDG	100	150	2.50	1	
MD 815 15 HDG	150	150	2.67	1	
MD 820 15 HDG	200	150	2.83	1	
MD 825 15 HDG	250	150	3.66	1	
MD 830 15 HDG	300	150	4.15	1	
MD 840 15 HDG	400	150	4.73	1	
MD 845 15 HDG	450	150	5.02	1	
MD 850 15 HDG	500	150	5.30	1	
MD 860 15 HDG	600	150	6.50	1	
MD 870 15 HDG	700	150	7.74	1	
MD 875 15 HDG	750	150	8.19	1	
MD 880 15 HDG	800	150	8.52	1	
MD 890 15 HDG	900	150	10.17	1	
MD 800 15 HDG	1000	150	11.16	1	
MD 802 15 HDG	1200	150	14.74	1	

MD... H80		2.0mm			
CODE	Width a=b=c=d mm	Radius R mm	kg 1pc	pcs	
MD 810 20 HDG	100	150	3.33	1	
MD 815 20 HDG	150	150	3.55	1	
MD 820 20 HDG	200	150	3.77	1	
MD 825 20 HDG	250	150	4.87	1	
MD 830 20 HDG	300	150	5.53	1	
MD 840 20 HDG	400	150	6.30	1	
MD 845 20 HDG	450	150	6.69	1	
MD 850 20 HDG	500	150	7.07	1	
MD 860 20 HDG	600	150	8.66	1	
MD 870 20 HDG	700	150	10.31	1	
MD 875 20 HDG	750	150	10.92	1	
MD 880 20 HDG	800	150	11.36	1	
MD 890 20 HDG	900	150	13.55	1	
MD 800 20 HDG	1000	150	14.87	1	
MD 802 20 HDG	1200	150	19.65	1	

Cross Bend of Cable Ladder Radius:300

Dörtlülü Merdiven Dönüş Elemanı R:300 - Крестовина кабельроста радиус:300

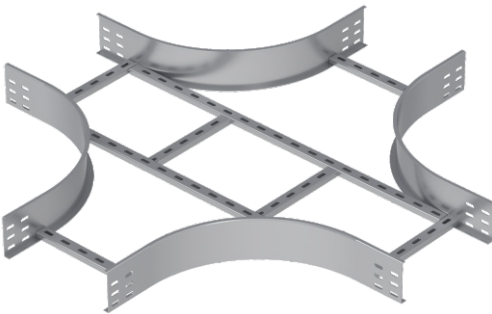

Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized



MDR2... H80		1.5mm			
CODE	Width a=b=c=d mm	Radius R mm	kg 1pc	pcs	
MDR2 810 15 HDG	100	300	5.91	1	
MDR2 815 15 HDG	150	300	6.19	1	
MDR2 820 15 HDG	200	300	6.74	1	
MDR2 825 15 HDG	250	300	7.11	1	
MDR2 830 15 HDG	300	300	7.47	1	
MDR2 840 15 HDG	400	300	8.30	1	
MDR2 845 15 HDG	450	300	8.67	1	
MDR2 850 15 HDG	500	300	9.03	1	
MDR2 860 15 HDG	600	300	11.79	1	
MDR2 870 15 HDG	700	300	12.71	1	
MDR2 875 15 HDG	750	300	13.17	1	
MDR2 880 15 HDG	800	300	13.72	1	
MDR2 890 15 HDG	900	300	15.10	1	
MDR2 800 15 HDG	1000	300	18.95	1	
MDR2 802 15 HDG	1200	300	21.02	1	

MDR2... H80		2.0mm			
CODE	Width a=b=c=d mm	Radius R mm	kg 1pc	pcs	
MDR2 810 20 HDG	100	300	7.88	1	
MDR2 815 20 HDG	150	300	8.25	1	
MDR2 820 20 HDG	200	300	8.98	1	
MDR2 825 20 HDG	250	300	9.47	1	
MDR2 830 20 HDG	300	300	9.96	1	
MDR2 840 20 HDG	400	300	11.06	1	
MDR2 845 20 HDG	450	300	11.55	1	
MDR2 850 20 HDG	500	300	12.04	1	
MDR2 860 20 HDG	600	300	15.72	1	
MDR2 870 20 HDG	700	300	16.94	1	
MDR2 875 20 HDG	750	300	17.56	1	
MDR2 880 20 HDG	800	300	18.29	1	
MDR2 890 20 HDG	900	300	20.13	1	
MDR2 800 20 HDG	1000	300	25.27	1	
MDR2 802 20 HDG	1200	300	28.03	1	

MD H80 HDG

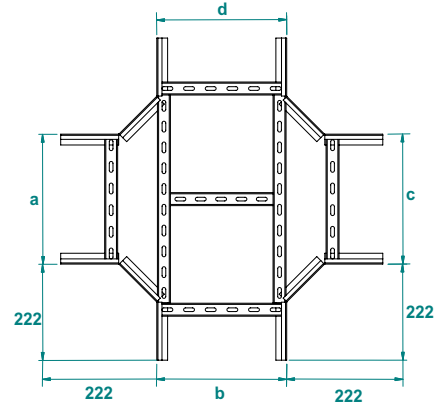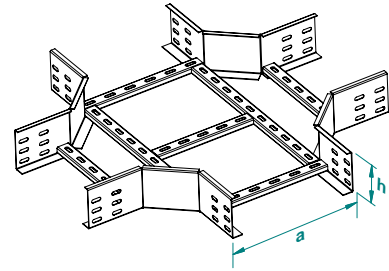

MDR2 H80 HDG

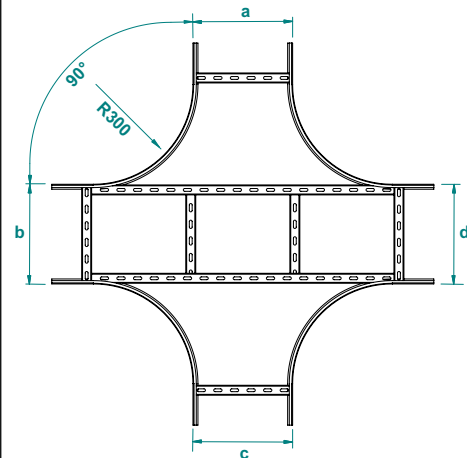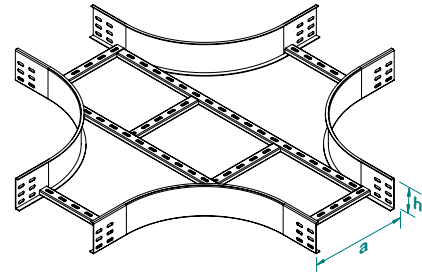

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method

to TS-EN 10346:2011 (PG)

SS- stainless steel AISI 304L and AISI 316L (SS)

EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0


Cable Ladder Systems of Side Height 80



MTK
MADE IN TURKEY

Cross Bend of Cable Ladder Radius:450

Dörtlülü Merdiven Dönüş Elemanı R:450 - Крестовина кабельроста радиус:450

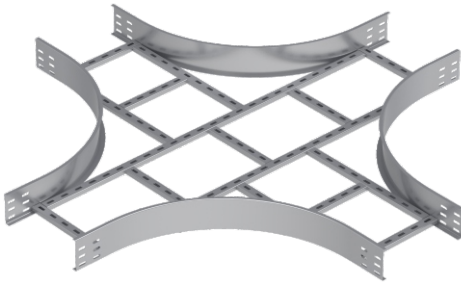

Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8


Hot-Dip Galvanized

MDR3... H80		1.5mm	
CODE	Width a=b=c=d mm	Radius R mm	kg 1pc
MDR3 810 15 HDG	100	450	7.62
MDR3 815 15 HDG	150	450	9.22
MDR3 820 15 HDG	200	450	9.73
MDR3 825 15 HDG	250	450	11.06
MDR3 830 15 HDG	300	450	11.75
MDR3 840 15 HDG	400	450	12.76
MDR3 845 15 HDG	450	450	13.27
MDR3 850 15 HDG	500	450	15.01
MDR3 860 15 HDG	600	450	16.11
MDR3 870 15 HDG	700	450	17.77
MDR3 875 15 HDG	750	450	18.36
MDR3 880 15 HDG	800	450	19.79
MDR3 890 15 HDG	900	450	22.50
MDR3 800 15 HDG	1000	450	23.78
MDR3 802 15 HDG	1200	450	27.32

MDR3... H80		2.0mm	
CODE	Width a=b=c=d mm	Radius R mm	kg 1pc
MDR3 810 20 HDG	100	450	10.15
MDR3 815 20 HDG	150	450	12.30
MDR3 820 20 HDG	200	450	12.97
MDR3 825 20 HDG	250	450	14.75
MDR3 830 20 HDG	300	450	15.66
MDR3 840 20 HDG	400	450	17.01
MDR3 845 20 HDG	450	450	17.69
MDR3 850 20 HDG	500	450	20.01
MDR3 860 20 HDG	600	450	21.48
MDR3 870 20 HDG	700	450	23.69
MDR3 875 20 HDG	750	450	24.48
MDR3 880 20 HDG	800	450	26.38
MDR3 890 20 HDG	900	450	29.99
MDR3 800 20 HDG	1000	450	31.71
MDR3 802 20 HDG	1200	450	36.42

Cross Bend of Cable Ladder Radius:600

Dörtlülü Merdiven Dönüş Elemanı R:600 - Крестовина кабельроста радиус:600

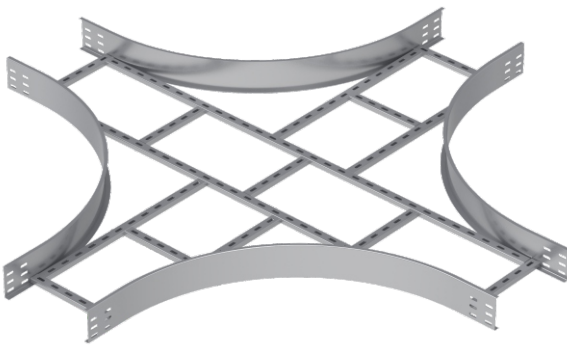

Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized



MDR4... H80		1.5mm	
CODE	Width a=b=c=d mm	Radius R mm	kg 1pc
MDR4 810 15 HDG	100	600	9.87
MDR4 815 15 HDG	150	600	11.99
MDR4 820 15 HDG	200	600	12.54
MDR4 825 15 HDG	250	600	13.00
MDR4 830 15 HDG	300	600	14.28
MDR4 840 15 HDG	400	600	15.57
MDR4 845 15 HDG	450	600	16.12
MDR4 850 15 HDG	500	600	18.14
MDR4 860 15 HDG	600	600	19.33
MDR4 870 15 HDG	700	600	20.53
MDR4 875 15 HDG	750	600	21.72
MDR4 880 15 HDG	800	600	23.37
MDR4 890 15 HDG	900	600	26.50
MDR4 800 15 HDG	1000	600	27.87
MDR4 802 15 HDG	1200	600	30.68

MDR4... H80		2.0mm	
CODE	Width a=b=c=d mm	Radius R mm	kg 1pc
MDR4 810 20 HDG	100	600	13.16
MDR4 815 20 HDG	150	600	15.98
MDR4 820 20 HDG	200	600	16.71
MDR4 825 20 HDG	250	600	17.33
MDR4 830 20 HDG	300	600	19.04
MDR4 840 20 HDG	400	600	20.75
MDR4 845 20 HDG	450	600	21.49
MDR4 850 20 HDG	500	600	24.18
MDR4 860 20 HDG	600	600	25.78
MDR4 870 20 HDG	700	600	27.37
MDR4 875 20 HDG	750	600	28.96
MDR4 880 20 HDG	800	600	31.16
MDR4 890 20 HDG	900	600	35.33
MDR4 800 20 HDG	1000	600	37.16
MDR4 802 20 HDG	1200	600	40.90

MDR3 H80 HDG

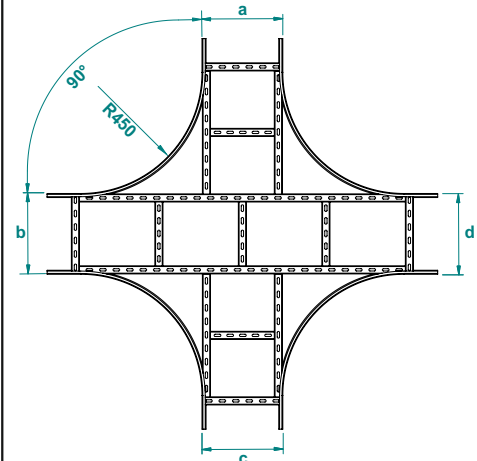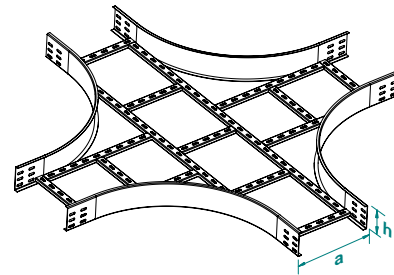

MDR4 H80 HDG

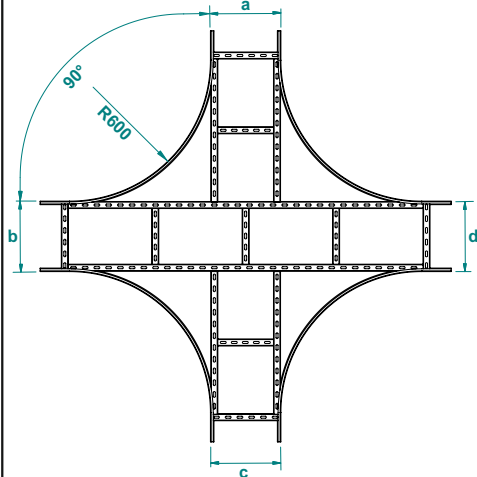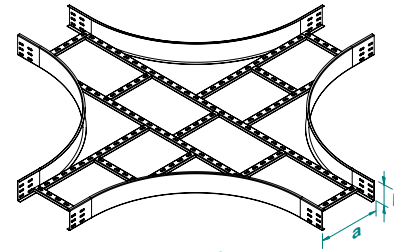

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method

to TS-EN 10346:2011 (PG)

SS- stainless steel AISI 304L and AISI 316L (SS)

EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0


Cable Ladder Systems of Side Height 80



MTK
MADE IN TURKEY

Middle Reducer Bend of Cable Ladder

Merdiven Ortadan Redüksiyon - Редукционный переходник кабельроста, симметричный

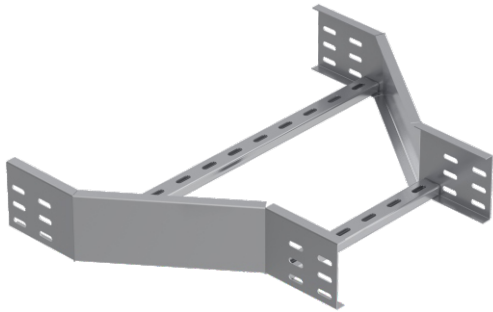

Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized


ROSM... H80		1.5mm			
CODE	Width W1 mm	Width W2 mm	kg 1pc		
ROSM 815.10 15 HDG	150	100	1.57	1	
ROSM 820.15 15 HDG	200	150	1.65	1	
ROSM 820.10 15 HDG	200	100	1.61	1	
ROSM 825.20 15 HDG	250	200	1.73	1	
ROSM 825.15 15 HDG	250	150	1.69	1	
ROSM 825.10 15 HDG	250	100	1.65	1	
ROSM 830.25 15 HDG	300	250	1.81	1	
ROSM 830.20 15 HDG	300	200	1.77	1	
ROSM 830.15 15 HDG	300	150	1.73	1	
ROSM 830.10 15 HDG	300	100	1.69	1	
ROSM 840.30 15 HDG	400	300	1.94	1	
ROSM 840.25 15 HDG	400	250	1.89	1	
ROSM 840.20 15 HDG	400	200	1.85	1	
ROSM 840.15 15 HDG	400	150	1.81	1	
ROSM 840.10 15 HDG	400	100	1.77	1	
ROSM 845.40 15 HDG	450	400	2.06	1	
ROSM 845.30 15 HDG	450	300	1.98	1	
ROSM 845.25 15 HDG	450	250	1.94	1	
ROSM 845.20 15 HDG	450	200	1.89	1	
ROSM 845.15 15 HDG	450	150	1.85	1	
ROSM 845.10 15 HDG	450	100	1.81	1	
ROSM 850.45 15 HDG	500	450	2.14	1	
ROSM 850.40 15 HDG	500	400	2.10	1	
ROSM 850.30 15 HDG	500	300	2.02	1	
ROSM 850.25 15 HDG	500	250	1.98	1	
ROSM 850.20 15 HDG	500	200	1.94	1	
ROSM 850.15 15 HDG	500	150	1.89	1	
ROSM 850.10 15 HDG	500	100	1.85	1	
ROSM 860.50 15 HDG	600	500	2.27	1	
ROSM 860.45 15 HDG	600	450	2.22	1	
ROSM 860.40 15 HDG	600	400	2.18	1	
ROSM 860.30 15 HDG	600	300	2.10	1	
ROSM 860.25 15 HDG	600	250	2.06	1	
ROSM 860.20 15 HDG	600	200	2.02	1	
ROSM 860.15 15 HDG	600	150	1.98	1	
ROSM 860.10 15 HDG	600	100	1.94	1	
ROSM 875.60 15 HDG	750	600	2.47	1	
ROSM 875.50 15 HDG	750	500	2.39	1	
ROSM 875.45 15 HDG	750	450	2.35	1	
ROSM 875.40 15 HDG	750	400	2.31	1	
ROSM 875.30 15 HDG	750	300	2.22	1	
ROSM 875.20 15 HDG	750	200	2.14	1	
ROSM 875.15 15 HDG	750	150	2.10	1	
ROSM 890.75 15 HDG	900	750	2.72	1	
ROSM 890.60 15 HDG	900	600	2.60	1	
ROSM 890.45 15 HDG	900	450	2.47	1	
ROSM 890.30 15 HDG	900	300	2.35	1	
ROSM 890.15 15 HDG	900	150	3.33	1	
ROSM 802.90 15 HDG	1200	900	3.09	1	
ROSM 802.75 15 HDG	1200	750	2.97	1	
ROSM 802.60 15 HDG	1200	600	2.84	1	
ROSM 802.30 15 HDG	1200	300	4.92	1	
ROSM 802.15 15 HDG	1200	150	5.07	1	

ROSM... H80		2.0mm			
CODE	Width W1 mm	Width W2 mm	kg 1pc		
ROSM 815.10 20 HDG	150	100	2.09	1	
ROSM 820.15 20 HDG	200	150	2.20	1	
ROSM 820.10 20 HDG	200	100	2.14	1	
ROSM 825.20 20 HDG	250	200	2.31	1	
ROSM 825.15 20 HDG	250	150	2.25	1	
ROSM 825.10 20 HDG	250	100	2.20	1	
ROSM 830.25 20 HDG	300	250	2.41	1	
ROSM 830.20 20 HDG	300	200	2.36	1	
ROSM 830.15 20 HDG	300	150	2.31	1	
ROSM 830.10 20 HDG	300	100	2.25	1	
ROSM 840.30 20 HDG	400	300	2.58	1	
ROSM 840.25 20 HDG	400	250	2.52	1	
ROSM 840.20 20 HDG	400	200	2.47	1	
ROSM 840.15 20 HDG	400	150	2.41	1	
ROSM 840.10 20 HDG	400	100	2.36	1	
ROSM 845.40 20 HDG	450	400	2.74	1	
ROSM 845.30 20 HDG	450	300	2.63	1	
ROSM 845.25 20 HDG	450	250	2.58	1	
ROSM 845.20 20 HDG	450	200	2.52	1	
ROSM 845.15 20 HDG	450	150	2.47	1	
ROSM 845.10 20 HDG	450	100	2.41	1	
ROSM 850.45 20 HDG	500	450	2.85	1	
ROSM 850.40 20 HDG	500	400	2.80	1	
ROSM 850.30 20 HDG	500	300	2.69	1	
ROSM 850.25 20 HDG	500	250	2.63	1	
ROSM 850.20 20 HDG	500	200	2.58	1	
ROSM 850.15 20 HDG	500	150	2.52	1	
ROSM 850.10 20 HDG	500	100	2.47	1	
ROSM 860.50 20 HDG	600	500	3.02	1	
ROSM 860.45 20 HDG	600	450	2.96	1	
ROSM 860.40 20 HDG	600	400	2.91	1	
ROSM 8160.30 20 HDG	600	300	2.80	1	
ROSM 860.25 20 HDG	600	250	2.74	1	
ROSM 860.20 20 HDG	600	200	2.69	1	
ROSM 860.15 20 HDG	600	150	2.63	1	
ROSM 860.10 20 HDG	600	100	2.58	1	
ROSM 875.60 20 HDG	750	600	3.29	1	
ROSM 875.50 20 HDG	750	500	3.18	1	
ROSM 875.45 20 HDG	750	450	3.13	1	
ROSM 875.40 20 HDG	750	400	3.07	1	
ROSM 875.30 20 HDG	750	300	2.96	1	
ROSM 875.20 20 HDG	750	200	2.85	1	
ROSM 875.15 20 HDG	750	150	2.80	1	
ROSM 890.75 20 HDG	900	750	3.62	1	
ROSM 890.60 20 HDG	900	600	3.46	1	
ROSM 890.45 20 HDG	900	450	3.29	1	
ROSM 890.30 20 HDG	900	300	3.13	1	
ROSM 890.15 20 HDG	900	150	4.44	1	
ROSM 802.90 20 HDG	1200	900	4.12	1	
ROSM 802.75 20 HDG	1200	750	3.95	1	
ROSM 802.60 20 HDG	1200	600	3.79	1	
ROSM 802.30 20 HDG	1200	300	6.55	1	
ROSM 802.15 20 HDG	1200	150	6.76	1	

ROSM H80 HDG

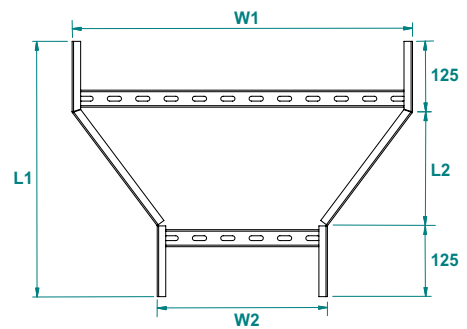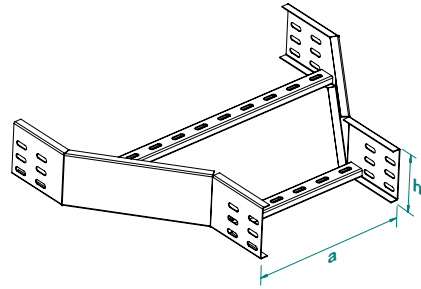

	L1	L2
100-600	450 mm	200 mm
700-1200	650 mm	400 mm

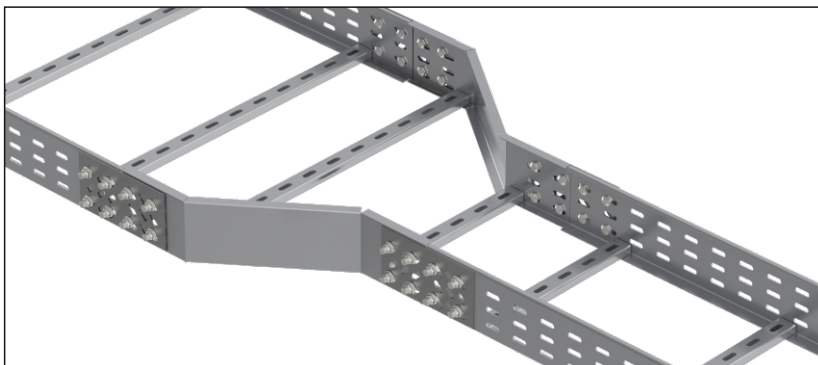

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: **1.5 2.0**


Cable Ladder Systems of Side Height 80



MTK
MADE IN TURKEY

Left Reducer Bend of Cable Ladder

Merdiven Soldan Redüksiyon - Редукционный переходник кабельроста, левосторонний

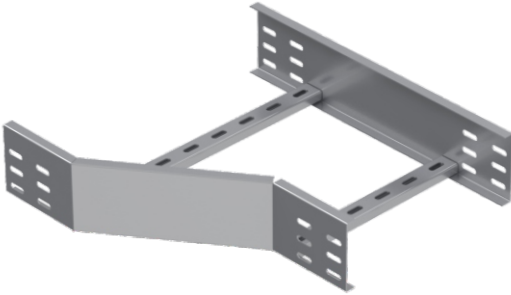


Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8



Hot-Dip Galvanized

RLSM... H80				1.5mm	
CODE	Width W1 mm	Width W1 mm	kg 1pc		pcs
RLSM 815.10 15 HDG	150	100	1.57	1	
RLSM 820.15 15 HDG	200	150	1.65	1	
RLSM 820.10 15 HDG	200	100	1.61	1	
RLSM 825.20 15 HDG	250	200	1.73	1	
RLSM 825.15 15 HDG	250	150	1.69	1	
RLSM 825.10 15 HDG	250	100	1.65	1	
RLSM 830.25 15 HDG	300	250	1.81	1	
RLSM 830.20 15 HDG	300	200	1.77	1	
RLSM 830.15 15 HDG	300	150	1.73	1	
RLSM 830.10 15 HDG	300	100	1.69	1	
RLSM 840.30 15 HDG	400	300	1.94	1	
RLSM 840.25 15 HDG	400	250	1.89	1	
RLSM 840.20 15 HDG	400	200	1.85	1	
RLSM 840.15 15 HDG	400	150	1.81	1	
RLSM 840.10 15 HDG	400	100	1.77	1	
RLSM 845.40 15 HDG	450	400	2.06	1	
RLSM 845.30 15 HDG	450	300	1.98	1	
RLSM 845.25 15 HDG	450	250	1.94	1	
RLSM 845.20 15 HDG	450	200	1.89	1	
RLSM 845.15 15 HDG	450	150	1.85	1	
RLSM 845.10 15 HDG	450	100	1.81	1	
RLSM 850.45 15 HDG	500	450	2.14	1	
RLSM 850.40 15 HDG	500	400	2.10	1	
RLSM 850.30 15 HDG	500	300	2.02	1	
RLSM 850.25 15 HDG	500	250	1.98	1	
RLSM 850.20 15 HDG	500	200	1.94	1	
RLSM 850.15 15 HDG	500	150	1.89	1	
RLSM 850.10 15 HDG	500	100	1.85	1	
RLSM 860.50 15 HDG	600	500	2.27	1	
RLSM 860.45 15 HDG	600	450	2.22	1	
RLSM 860.40 15 HDG	600	400	2.18	1	
RLSM 860.30 15 HDG	600	300	2.10	1	
RLSM 860.25 15 HDG	600	250	2.06	1	
RLSM 860.20 15 HDG	600	200	2.02	1	
RLSM 860.15 15 HDG	600	150	1.98	1	
RLSM 860.10 15 HDG	600	100	1.94	1	
RLSM 875.60 15 HDG	750	600	2.47	1	
RLSM 875.50 15 HDG	750	500	2.39	1	
RLSM 875.45 15 HDG	750	450	2.35	1	
RLSM 875.40 15 HDG	750	400	2.31	1	
RLSM 875.30 15 HDG	750	300	2.22	1	
RLSM 175.20 15 HDG	750	200	2.14	1	
RLSM 175.15 15 HDG	750	150	2.10	1	
RLSM 190.75 15 HDG	900	750	2.72	1	
RLSM 190.60 15 HDG	900	600	2.60	1	
RLSM 190.45 15 HDG	900	450	2.47	1	
RLSM 190.30 15 HDG	900	300	2.35	1	
RLSM 190.15 15 HDG	900	150	3.33	1	
RLSM 102.90 15 HDG	1200	900	3.09	1	
RLSM 102.75 15 HDG	1200	750	2.97	1	
RLSM 102.60 15 HDG	1200	600	2.84	1	
RLSM 102.30 15 HDG	1200	300	4.92	1	
RLSM 102.15 15 HDG	1200	150	5.07	1	

RLSM... H80				2.0mm	
CODE	Width W1 mm	Width W1 mm	kg 1pc		pcs
RLSM 815.10 20 HDG	150	100	2.09	1	
RLSM 820.15 20 HDG	200	150	2.20	1	
RLSM 820.10 20 HDG	200	100	2.14	1	
RLSM 825.20 20 HDG	250	200	2.31	1	
RLSM 825.15 20 HDG	250	150	2.25	1	
RLSM 825.10 20 HDG	250	100	2.20	1	
RLSM 830.25 20 HDG	300	250	2.41	1	
RLSM 830.20 20 HDG	300	200	2.36	1	
RLSM 830.15 20 HDG	300	150	2.31	1	
RLSM 830.10 20 HDG	300	100	2.25	1	
RLSM 840.30 20 HDG	400	300	2.58	1	
RLSM 840.25 20 HDG	400	250	2.52	1	
RLSM 840.20 20 HDG	400	200	2.47	1	
RLSM 840.15 20 HDG	400	150	2.41	1	
RLSM 840.10 20 HDG	400	100	2.36	1	
RLSM 845.40 20 HDG	450	400	2.74	1	
RLSM 845.30 20 HDG	450	300	2.63	1	
RLSM 845.25 20 HDG	450	250	2.58	1	
RLSM 845.20 20 HDG	450	200	2.52	1	
RLSM 845.15 20 HDG	450	150	2.47	1	
RLSM 845.10 20 HDG	450	100	2.41	1	
RLSM 850.45 20 HDG	500	450	2.85	1	
RLSM 850.40 20 HDG	500	400	2.80	1	
RLSM 850.30 20 HDG	500	300	2.69	1	
RLSM 850.25 20 HDG	500	250	2.63	1	
RLSM 850.20 20 HDG	500	200	2.58	1	
RLSM 850.15 20 HDG	500	150	2.52	1	
RLSM 850.10 20 HDG	500	100	2.47	1	
RLSM 860.50 20 HDG	600	500	3.02	1	
RLSM 860.45 20 HDG	600	450	2.96	1	
RLSM 860.40 20 HDG	600	400	2.91	1	
RLSM 860.30 20 HDG	600	300	2.80	1	
RLSM 860.25 20 HDG	600	250	2.74	1	
RLSM 860.20 20 HDG	600	200	2.69	1	
RLSM 860.15 20 HDG	600	150	2.63	1	
RLSM 860.10 20 HDG	600	100	2.58	1	
RLSM 875.60 20 HDG	750	600	3.29	1	
RLSM 875.50 20 HDG	750	500	3.18	1	
RLSM 875.45 20 HDG	750	450	3.13	1	
RLSM 875.40 20 HDG	750	400	3.07	1	
RLSM 875.30 20 HDG	750	300	2.96	1	
RLSM 875.20 20 HDG	750	200	2.85	1	
RLSM 875.15 20 HDG	750	150	2.80	1	
RLSM 890.75 20 HDG	900	750	3.62	1	
RLSM 890.60 20 HDG	900	600	3.46	1	
RLSM 890.45 20 HDG	900	450	3.29	1	
RLSM 890.30 20 HDG	900	300	3.13	1	
RLSM 890.15 20 HDG	900	150	4.44	1	
RLSM 802.90 20 HDG	1200	900	4.12	1	
RLSM 802.75 20 HDG	1200	750	3.95	1	
RLSM 802.60 20 HDG	1200	600	3.79	1	
RLSM 802.30 20 HDG	1200	300	6.55	1	
RLSM 802.15 20 HDG	1200	150	6.76	1	

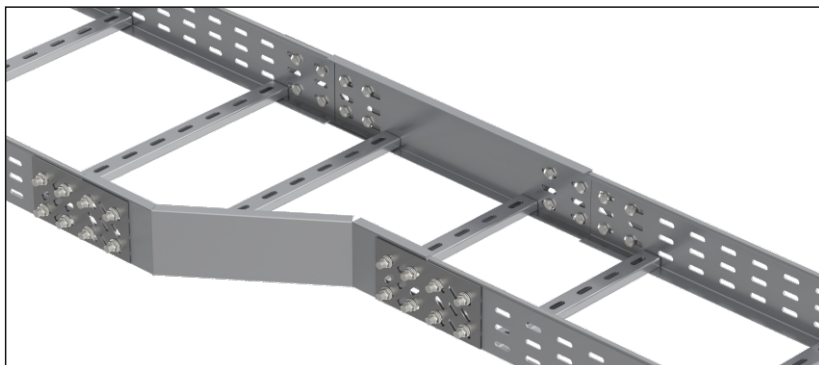

RLSM H80 HDG

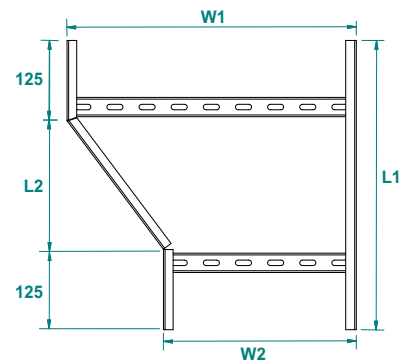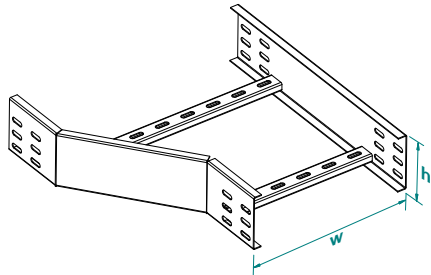

	L1	L2
100-600	450 mm	200 mm
700-1200	650 mm	400 mm

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: **1.5 2.0**


Cable Ladder Systems of Side Height 80



MTK
MADE IN TURKEY

Right Reducer Bend of Cable Ladder

Merdiven Sağdan Redüksiyon - Редукционный переходник кабельроста, правосторонний

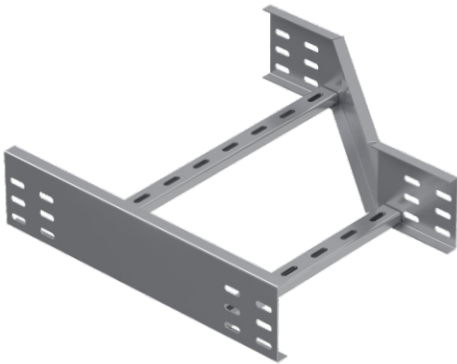


Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8



Hot-Dip Galvanized

RGSM... H80		1.5mm	
CODE	Width W1 mm	Width W1 mm	kg 1pc
RGSM 815.10 15 HDG	150	100	1.57 1
RGSM 820.15 15 HDG	200	150	1.65 1
RGSM 820.10 15 HDG	200	100	1.61 1
RGSM 825.20 15 HDG	250	200	1.73 1
RGSM 825.15 15 HDG	250	150	1.69 1
RGSM 825.10 15 HDG	250	100	1.65 1
RGSM 830.25 15 HDG	300	250	1.81 1
RGSM 830.20 15 HDG	300	200	1.77 1
RGSM 830.15 15 HDG	300	150	1.73 1
RGSM 830.10 15 HDG	300	100	1.69 1
RGSM 840.30 15 HDG	400	300	1.94 1
RGSM 840.25 15 HDG	400	250	1.89 1
RGSM 840.20 15 HDG	400	200	1.85 1
RGSM 840.15 15 HDG	400	150	1.81 1
RGSM 840.10 15 HDG	400	100	1.77 1
RGSM 845.40 15 HDG	450	400	2.06 1
RGSM 845.30 15 HDG	450	300	1.98 1
RGSM 845.25 15 HDG	450	250	1.94 1
RGSM 845.20 15 HDG	450	200	1.89 1
RGSM 845.15 15 HDG	450	150	1.85 1
RGSM 845.10 15 HDG	450	100	1.81 1
RGSM 850.45 15 HDG	500	450	2.14 1
RGSM 850.40 15 HDG	500	400	2.10 1
RGSM 850.30 15 HDG	500	300	2.02 1
RGSM 850.25 15 HDG	500	250	1.98 1
RGSM 850.20 15 HDG	500	200	1.94 1
RGSM 850.15 15 HDG	500	150	1.89 1
RGSM 850.10 15 HDG	500	100	1.85 1
RGSM 860.50 15 HDG	600	500	2.27 1
RGSM 860.45 15 HDG	600	450	2.22 1
RGSM 860.40 15 HDG	600	400	2.18 1
RGSM 860.30 15 HDG	600	300	2.10 1
RGSM 860.25 15 HDG	600	250	2.06 1
RGSM 860.20 15 HDG	600	200	2.02 1
RGSM 860.15 15 HDG	600	150	1.98 1
RGSM 860.10 15 HDG	600	100	1.94 1
RGSM 875.60 15 HDG	750	600	2.47 1
RGSM 875.50 15 HDG	750	500	2.39 1
RGSM 875.45 15 HDG	750	450	2.35 1
RGSM 875.40 15 HDG	750	400	2.31 1
RGSM 875.30 15 HDG	750	300	2.22 1
RGSM 875.20 15 HDG	750	200	2.14 1
RGSM 875.15 15 HDG	750	150	2.10 1
RGSM 890.75 15 HDG	900	750	2.72 1
RGSM 890.60 15 HDG	900	600	2.60 1
RGSM 890.45 15 HDG	900	450	2.47 1
RGSM 890.30 15 HDG	900	300	2.35 1
RGSM 890.15 15 HDG	900	150	3.33 1
RGSM 802.90 15 HDG	1200	900	3.09 1
RGSM 802.75 15 HDG	1200	750	2.97 1
RGSM 802.60 15 HDG	1200	600	2.84 1
RGSM 802.30 15 HDG	1200	300	4.92 1
RGSM 802.15 15 HDG	1200	150	5.07 1

RGSM... H80		2.0mm	
CODE	Width W1 mm	Width W1 mm	kg 1pc
RGSM 815.10 20 HDG	150	100	2.09 1
RGSM 820.15 20 HDG	200	150	2.20 1
RGSM 820.10 20 HDG	200	100	2.14 1
RGSM 825.20 20 HDG	250	200	2.31 1
RGSM 825.15 20 HDG	250	150	2.25 1
RGSM 825.10 20 HDG	250	100	2.20 1
RGSM 830.25 20 HDG	300	250	2.41 1
RGSM 830.20 20 HDG	300	200	2.36 1
RGSM 830.15 20 HDG	300	150	2.31 1
RGSM 830.10 20 HDG	300	100	2.25 1
RGSM 840.30 20 HDG	400	300	2.58 1
RGSM 840.25 20 HDG	400	250	2.52 1
RGSM 840.20 20 HDG	400	200	2.47 1
RGSM 840.15 20 HDG	400	150	2.41 1
RGSM 840.10 20 HDG	400	100	2.36 1
RGSM 845.40 20 HDG	450	400	2.74 1
RGSM 845.30 20 HDG	450	300	2.63 1
RGSM 845.25 20 HDG	450	250	2.58 1
RGSM 845.20 20 HDG	450	200	2.52 1
RGSM 845.15 20 HDG	450	150	2.47 1
RGSM 845.10 20 HDG	450	100	2.41 1
RGSM 850.45 20 HDG	500	450	2.85 1
RGSM 850.40 20 HDG	500	400	2.80 1
RGSM 850.30 20 HDG	500	300	2.69 1
RGSM 850.25 20 HDG	500	250	2.63 1
RGSM 850.20 20 HDG	500	200	2.58 1
RGSM 850.15 20 HDG	500	150	2.52 1
RGSM 850.10 20 HDG	500	100	2.47 1
RGSM 860.50 20 HDG	600	500	3.02 1
RGSM 860.45 20 HDG	600	450	2.96 1
RGSM 860.40 20 HDG	600	400	2.91 1
RGSM 860.30 20 HDG	600	300	2.80 1
RGSM 860.25 20 HDG	600	250	2.74 1
RGSM 860.20 20 HDG	600	200	2.69 1
RGSM 860.15 20 HDG	600	150	2.63 1
RGSM 860.10 20 HDG	600	100	2.58 1
RGSM 875.60 20 HDG	750	600	3.29 1
RGSM 875.50 20 HDG	750	500	3.18 1
RGSM 875.45 20 HDG	750	450	3.13 1
RGSM 875.40 20 HDG	750	400	3.07 1
RGSM 875.30 20 HDG	750	300	2.96 1
RGSM 875.20 20 HDG	750	200	2.85 1
RGSM 875.15 20 HDG	750	150	2.80 1
RGSM 890.75 20 HDG	900	750	3.62 1
RGSM 890.60 20 HDG	900	600	3.46 1
RGSM 890.45 20 HDG	900	450	3.29 1
RGSM 890.30 20 HDG	900	300	3.13 1
RGSM 890.15 20 HDG	900	150	4.44 1
RGSM 802.90 20 HDG	1200	900	4.12 1
RGSM 802.75 20 HDG	1200	750	3.95 1
RGSM 802.60 20 HDG	1200	600	3.79 1
RGSM 802.30 20 HDG	1200	300	6.55 1
RGSM 802.15 20 HDG	1200	150	6.76 1

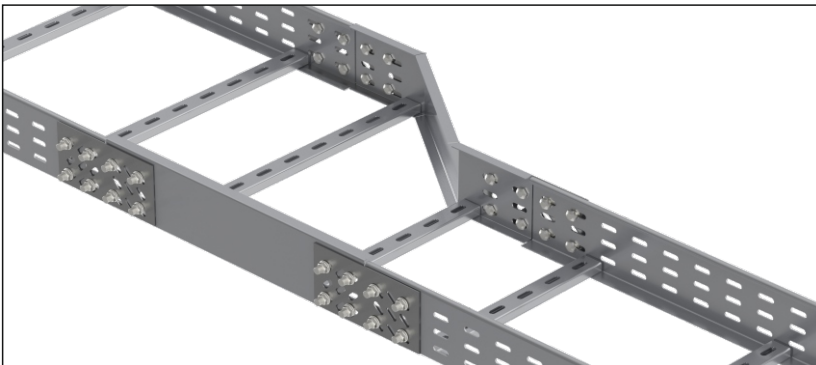

RGSM H80 HDG

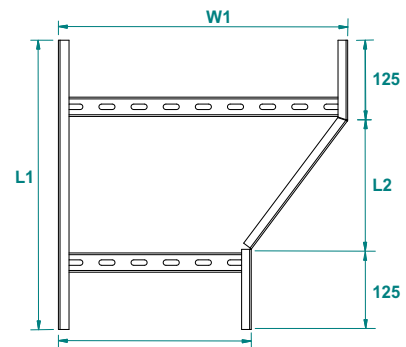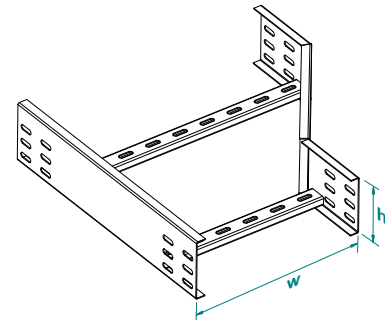

	L1	L2
100-600	450 mm	200 mm
700-1200	650 mm	400 mm

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method
to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0


Cable Ladder Systems of Side Height 80



MTK
MADE IN TURKEY

Vertical 90° Inside Bend of Cable Ladder (stable)

90° Dikey Merdiven İç Bükey Elemanı-(Sabit) - Арка фиксированная кабельроста, внутренняя 90°

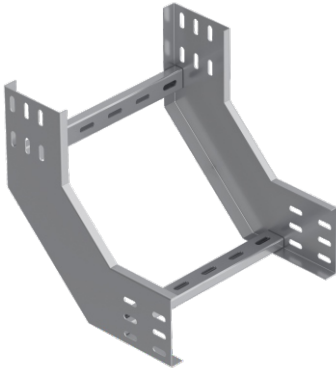

Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized

MIS... H80		1.5mm			
CODE	Width a=b mm	Radius R mm			
MIS 810 15 HDG	100	150	1.74	1	1
MIS 815 15 HDG	150	150	1.87	1	1
MIS 820 15 HDG	200	150	1.99	1	1
MIS 825 15 HDG	250	150	2.11	1	1
MIS 830 15 HDG	300	150	2.24	1	1
MIS 840 15 HDG	400	150	2.48	1	1
MIS 845 15 HDG	450	150	2.61	1	1
MIS 850 15 HDG	500	150	2.73	1	1
MIS 860 15 HDG	600	150	2.98	1	1
MIS 870 15 HDG	700	150	3.23	1	1
MIS 875 15 HDG	750	150	3.35	1	1
MIS 880 15 HDG	800	150	3.47	1	1
MIS 890 15 HDG	900	150	3.72	1	1
MIS 800 15 HDG	1000	150	3.97	1	1
MIS 802 15 HDG	1200	150	4.46	1	1

MIS... H80		2.0mm			
CODE	Width a=b mm	Radius R mm			
MIS 110 20 HDG	100	150	2.32	1	1
MIS 115 20 HDG	150	150	2.49	1	1
MIS 120 20 HDG	200	150	2.65	1	1
MIS 125 20 HDG	250	150	2.82	1	1
MIS 130 20 HDG	300	150	2.98	1	1
MIS 140 20 HDG	400	150	3.31	1	1
MIS 145 20 HDG	450	150	3.47	1	1
MIS 150 20 HDG	500	150	3.64	1	1
MIS 160 20 HDG	600	150	3.97	1	1
MIS 170 20 HDG	700	150	4.30	1	1
MIS 175 20 HDG	750	150	4.46	1	1
MIS 180 20 HDG	800	150	4.63	1	1
MIS 190 20 HDG	900	150	4.96	1	1
MIS 100 20 HDG	1000	150	5.29	1	1
MIS 102 20 HDG	1200	150	5.95	1	1

Vertical 90° Inside Bend of Cable Ladder (stable) Radius:300

90° Dikey Merdiven İç Bükey Elemanı-(Sabit) Radyus:300 - Арка фиксированная кабельроста, внутренняя 90° радиус:300



Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized



MISR2... H80		1.5mm			
CODE	Width a=b mm	Radius R mm			
MISR2 810 15 HDG	100	300	3.58	1	1
MISR2 815 15 HDG	150	300	3.72	1	1
MISR2 820 15 HDG	200	300	3.86	1	1
MISR2 825 15 HDG	250	300	3.99	1	1
MISR2 830 15 HDG	300	300	4.13	1	1
MISR2 840 15 HDG	400	300	4.41	1	1
MISR2 845 15 HDG	450	300	4.54	1	1
MISR2 850 15 HDG	500	300	4.68	1	1
MISR2 860 15 HDG	600	300	4.96	1	1
MISR2 870 15 HDG	700	300	5.23	1	1
MISR2 875 15 HDG	750	300	5.37	1	1
MISR2 880 15 HDG	800	300	5.51	1	1
MISR2 890 15 HDG	900	300	5.78	1	1
MISR2 800 15 HDG	1000	300	6.06	1	1
MISR2 802 15 HDG	1200	300	6.61	1	1

MISR2... H80		2.0mm			
CODE	Width a=b mm	Radius R mm			
MISR2 810 20 HDG	100	300	4.77	1	1
MISR2 815 20 HDG	150	300	4.96	1	1
MISR2 820 20 HDG	200	300	5.14	1	1
MISR2 825 20 HDG	250	300	5.32	1	1
MISR2 830 20 HDG	300	300	5.51	1	1
MISR2 840 20 HDG	400	300	5.87	1	1
MISR2 845 20 HDG	450	300	6.06	1	1
MISR2 850 20 HDG	500	300	6.24	1	1
MISR2 860 20 HDG	600	300	6.61	1	1
MISR2 870 20 HDG	700	300	6.98	1	1
MISR2 875 20 HDG	750	300	7.16	1	1
MISR2 880 20 HDG	800	300	7.34	1	1
MISR2 890 20 HDG	900	300	7.71	1	1
MISR2 800 20 HDG	1000	300	8.08	1	1
MISR2 802 20 HDG	1200	300	8.81	1	1

MIS H80 HDG

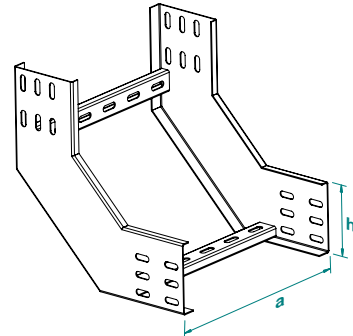

MISR2 H80 HDG

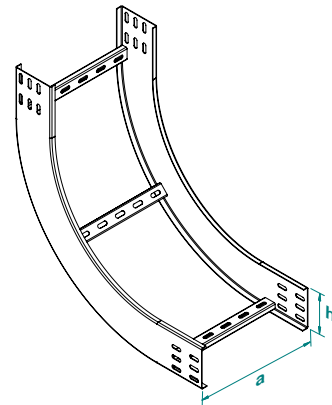

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method
to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: **1.5 2.0**

Cable Ladder Systems of Side Height 80



MTK
MADE IN TURKEY

Vertical 90° Inside Bend of Cable Ladder (stable) Radius:450

90° Dikey Merdiven İç Bükey Elemanı-(Sabit) Radyus:450 - 90° Dikey Merdiven İç Bükey Elemanı-(Sabit) Radyus:450



Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized

MISR3... H80		1.5mm			
CODE	Width a=b mm	Radius R mm	Kg 1pc	pcs	
MISR3 810 15 HDG	100	450	4.63	1	
MISR3 815 15 HDG	150	450	4.82	1	
MISR3 820 15 HDG	200	450	5.00	1	
MISR3 825 15 HDG	250	450	5.18	1	
MISR3 830 15 HDG	300	450	5.37	1	
MISR3 840 15 HDG	400	450	5.73	1	
MISR3 845 15 HDG	450	450	5.92	1	
MISR3 850 15 HDG	500	450	6.10	1	
MISR3 860 15 HDG	600	450	6.47	1	
MISR3 870 15 HDG	700	450	6.84	1	
MISR3 875 15 HDG	750	450	7.02	1	
MISR3 880 15 HDG	800	450	7.20	1	
MISR3 890 15 HDG	900	450	7.57	1	
MISR3 800 15 HDG	1000	450	7.94	1	
MISR3 802 15 HDG	1200	450	8.67	1	

MISR3... H80		2.0mm			
CODE	Width a=b mm	Radius R mm	Kg 1pc	pcs	
MISR3 810 20 HDG	100	450	6.17	1	
MISR3 815 20 HDG	150	450	6.42	1	
MISR3 820 20 HDG	200	450	6.66	1	
MISR3 825 20 HDG	250	450	6.91	1	
MISR3 830 20 HDG	300	450	7.15	1	
MISR3 840 20 HDG	400	450	7.64	1	
MISR3 845 20 HDG	450	450	7.89	1	
MISR3 850 20 HDG	500	450	8.13	1	
MISR3 860 20 HDG	600	450	8.62	1	
MISR3 870 20 HDG	700	450	9.11	1	
MISR3 875 20 HDG	750	450	9.36	1	
MISR3 880 20 HDG	800	450	9.60	1	
MISR3 890 20 HDG	900	450	10.09	1	
MISR3 800 20 HDG	1000	450	10.58	1	
MISR3 802 20 HDG	1200	450	11.56	1	

Vertical 90° Inside Bend of Cable Ladder (stable) Radius:600

90° Dikey Merdiven İç Bükey Elemanı-(Sabit) Radyus:600 - Арка фиксированная кабельроста, внутренняя 90° радиус:600



Important!


To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized


MISR4... H80		1.5mm			
CODE	Width a=b mm	Radius R mm	Kg 1pc	pcs	
MISR4 810 15 HDG	100	600	5.80	1	
MISR4 815 15 HDG	150	600	6.03	1	
MISR4 820 15 HDG	200	600	6.26	1	
MISR4 825 15 HDG	250	600	6.49	1	
MISR4 830 15 HDG	300	600	6.72	1	
MISR4 840 15 HDG	400	600	7.18	1	
MISR4 845 15 HDG	450	600	7.41	1	
MISR4 850 15 HDG	500	600	7.64	1	
MISR4 860 15 HDG	600	600	8.10	1	
MISR4 870 15 HDG	700	600	8.56	1	
MISR4 875 15 HDG	750	600	8.79	1	
MISR4 880 15 HDG	800	600	9.02	1	
MISR4 890 15 HDG	900	600	9.48	1	
MISR4 800 15 HDG	1000	600	9.94	1	
MISR4 802 15 HDG	1200	600	10.86	1	

MISR4... H80		2.0mm			
CODE	Width a=b mm	Radius R mm	Kg 1pc	pcs	
MISR4 110 20 HDG	100	600	7.74	1	
MISR4 115 20 HDG	150	600	8.04	1	
MISR4 120 20 HDG	200	600	8.35	1	
MISR4 125 20 HDG	250	600	8.66	1	
MISR4 130 20 HDG	300	600	8.96	1	
MISR4 140 20 HDG	400	600	9.57	1	
MISR4 145 20 HDG	450	600	9.88	1	
MISR4 150 20 HDG	500	600	10.19	1	
MISR4 160 20 HDG	600	600	10.80	1	
MISR4 170 20 HDG	700	600	11.41	1	
MISR4 175 20 HDG	750	600	11.72	1	
MISR4 180 20 HDG	800	600	12.02	1	
MISR4 190 20 HDG	900	600	12.64	1	
MISR4 100 20 HDG	1000	600	13.25	1	
MISR4 102 20 HDG	1200	600	14.47	1	

MISR3 H80 HDG

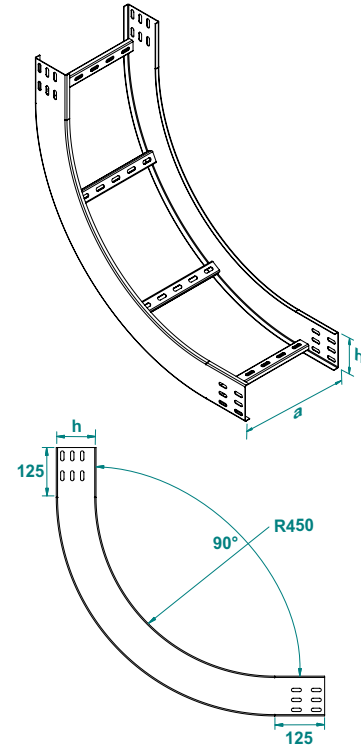

MISR4 H80 HDG

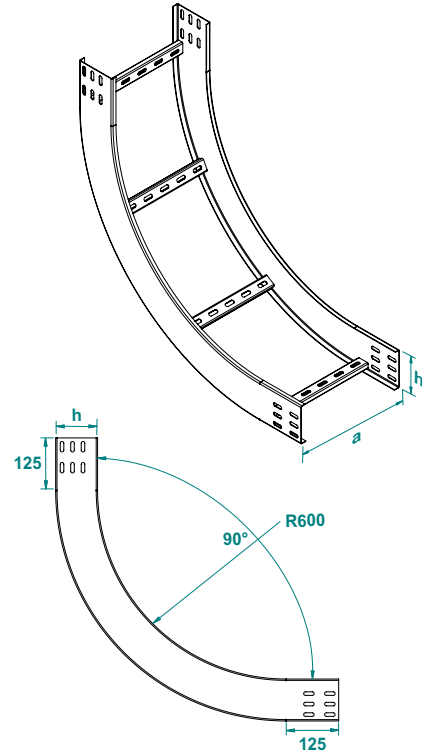

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method

to TS-EN 10346:2011 (PG)

SS- stainless steel AISI 304L and AISI 316L (SS)

EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0


Cable Ladder Systems of Side Height 80



MTK
MADE IN TURKEY

Vertical 60° Inside Bend of Cable Ladder (stable)

60° Dikey Merdiven İç Bükey Elemanı-(Sabit) - Арка фиксированная кабельроста, внутренняя 60°



Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8


Hot-Dip Galvanized

MIS60... H80		1.5mm			
CODE	Width a=b mm	Radius R mm	Kg 1pc	pcs	
MIS60 810 15 HDG	100	150	1.61	1	
MIS60 815 15 HDG	150	150	1.73	1	
MIS60 820 15 HDG	200	150	1.85	1	
MIS60 825 15 HDG	250	150	1.98	1	
MIS60 830 15 HDG	300	150	2.10	1	
MIS60 840 15 HDG	400	150	2.35	1	
MIS60 845 15 HDG	450	150	2.47	1	
MIS60 850 15 HDG	500	150	2.60	1	
MIS60 860 15 HDG	600	150	2.84	1	
MIS60 870 15 HDG	700	150	3.09	1	
MIS60 875 15 HDG	750	150	3.21	1	
MIS60 880 15 HDG	800	150	3.34	1	
MIS60 890 15 HDG	900	150	3.58	1	
MIS60 800 15 HDG	1000	150	3.83	1	
MIS60 802 15 HDG	1200	150	4.33	1	

MIS60... H80		2.0mm			
CODE	Width a=b mm	Radius R mm	Kg 1pc	pcs	
MIS60 810 20 HDG	100	150	2.14	1	
MIS60 815 20 HDG	150	150	2.31	1	
MIS60 820 20 HDG	200	150	2.47	1	
MIS60 825 20 HDG	250	150	2.63	1	
MIS60 830 20 HDG	300	150	2.80	1	
MIS60 840 20 HDG	400	150	3.13	1	
MIS60 845 20 HDG	450	150	3.29	1	
MIS60 850 20 HDG	500	150	3.46	1	
MIS60 860 20 HDG	600	150	3.79	1	
MIS60 870 20 HDG	700	150	4.12	1	
MIS60 875 20 HDG	750	150	4.28	1	
MIS60 880 20 HDG	800	150	4.45	1	
MIS60 890 20 HDG	900	150	4.78	1	
MIS60 800 20 HDG	1000	150	5.11	1	
MIS60 802 20 HDG	1200	150	5.77	1	

Vertical 60° Inside Bend of Cable Ladder (stable) Radius:300

60° Dikey Merdiven İç Bükey Elemanı-(Sabit) Radyus:300 - Арка фиксированная кабельроста, внутренняя 60° радиус:300

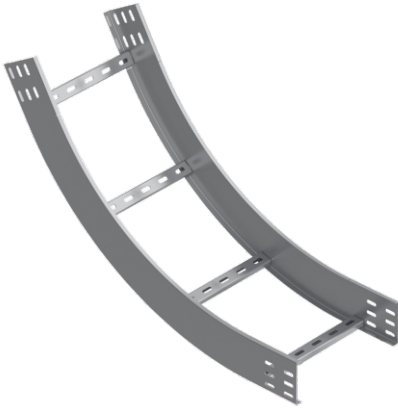

Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized


MIS60R2... H80		1.5mm			
CODE	Width a=b mm	Radius R mm	Kg 1pc	pcs	
MIS60R2 810 15 HDG	100	300	2.83	1	
MIS60R2 815 15 HDG	150	300	2.97	1	
MIS60R2 820 15 HDG	200	300	3.11	1	
MIS60R2 825 15 HDG	250	300	3.24	1	
MIS60R2 830 15 HDG	300	300	3.38	1	
MIS60R2 840 15 HDG	400	300	3.66	1	
MIS60R2 845 15 HDG	450	300	3.79	1	
MIS60R2 850 15 HDG	500	300	3.93	1	
MIS60R2 860 15 HDG	600	300	4.21	1	
MIS60R2 870 15 HDG	700	300	4.48	1	
MIS60R2 875 15 HDG	750	300	4.62	1	
MIS60R2 880 15 HDG	800	300	4.76	1	
MIS60R2 890 15 HDG	900	300	5.03	1	
MIS60R2 800 15 HDG	1000	300	5.31	1	
MIS60R2 802 15 HDG	1200	300	5.86	1	

MIS60R2... H80		2.0mm			
CODE	Width a=b mm	Radius R mm	Kg 1pc	pcs	
MIS60R2 810 20 HDG	100	300	3.77	1	
MIS60R2 815 20 HDG	150	300	3.96	1	
MIS60R2 820 20 HDG	200	300	4.14	1	
MIS60R2 825 20 HDG	250	300	4.32	1	
MIS60R2 830 20 HDG	300	300	4.51	1	
MIS60R2 840 20 HDG	400	300	4.87	1	
MIS60R2 845 20 HDG	450	300	5.06	1	
MIS60R2 850 20 HDG	500	300	5.24	1	
MIS60R2 860 20 HDG	600	300	5.61	1	
MIS60R2 870 20 HDG	700	300	5.98	1	
MIS60R2 875 20 HDG	750	300	6.16	1	
MIS60R2 880 20 HDG	800	300	6.34	1	
MIS60R2 890 20 HDG	900	300	6.71	1	
MIS60R2 800 20 HDG	1000	300	7.08	1	
MIS60R2 802 20 HDG	1200	300	7.81	1	

MIS60 H80 HDG

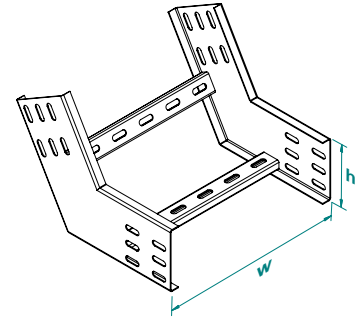

MIS60R2 H100 HDG

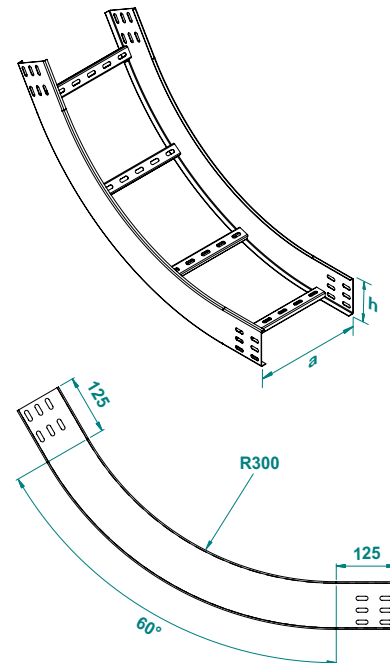

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method
to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0

Cable Ladder Systems of Side Height 80



MTK
MADE IN TURKEY

Vertical 60° Inside Bend of Cable Ladder (stable) Radius:450

60° Dikey Merdiven İç Bükey Elemanı-(Sabit) Radyus:450 - Арка фиксированная кабельроста, внутренняя 60° радиус:450



Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8


Hot-Dip Galvanized

MIS60R3... H80		1.5mm			
CODE	Width a=b mm	Radius R mm	Kg 1pc	pcs	
MIS60R3 810 15 HDG	100	450	3.52	1	
MIS60R3 815 15 HDG	150	450	3.66	1	
MIS60R3 820 15 HDG	200	450	3.80	1	
MIS60R3 825 15 HDG	250	450	3.93	1	
MIS60R3 830 15 HDG	300	450	4.07	1	
MIS60R3 840 15 HDG	400	450	4.35	1	
MIS60R3 845 15 HDG	450	450	4.48	1	
MIS60R3 850 15 HDG	500	450	4.62	1	
MIS60R3 860 15 HDG	600	450	4.90	1	
MIS60R3 870 15 HDG	700	450	5.17	1	
MIS60R3 875 15 HDG	750	450	5.31	1	
MIS60R3 880 15 HDG	800	450	5.45	1	
MIS60R3 890 15 HDG	900	450	5.72	1	
MIS60R3 800 15 HDG	1000	450	6.00	1	
MIS60R3 802 15 HDG	1200	450	6.55	1	

MIS60R3... H80		2.0mm			
CODE	Width a=b mm	Radius R mm	Kg 1pc	pcs	
MIS60R3 810 20 HDG	100	450	4.69	1	
MIS60R3 815 20 HDG	150	450	4.88	1	
MIS60R3 820 20 HDG	200	450	5.06	1	
MIS60R3 825 20 HDG	250	450	5.24	1	
MIS60R3 830 20 HDG	300	450	5.43	1	
MIS60R3 840 20 HDG	400	450	5.79	1	
MIS60R3 845 20 HDG	450	450	5.98	1	
MIS60R3 850 20 HDG	500	450	6.16	1	
MIS60R3 860 20 HDG	600	450	6.53	1	
MIS60R3 870 20 HDG	700	450	6.90	1	
MIS60R3 875 20 HDG	750	450	7.08	1	
MIS60R3 880 20 HDG	800	450	7.26	1	
MIS60R3 890 20 HDG	900	450	7.63	1	
MIS60R3 800 20 HDG	1000	450	8.00	1	
MIS60R3 802 20 HDG	1200	450	8.73	1	

Vertical 60° Inside Bend of Cable Ladder (stable) Radius:600

60° Dikey Merdiven İç Bükey Elemanı-(Sabit) Radyus:600 - Арка фиксированная кабельроста, внутренняя 60° радиус:600

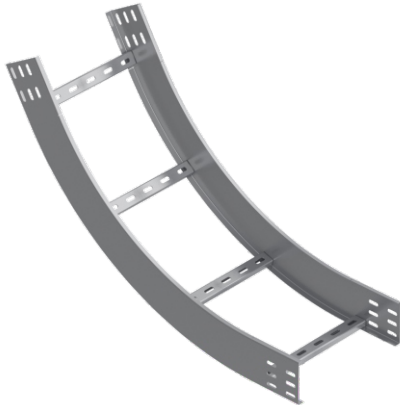

Important!


To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized


MIS60R4... H80		1.5mm			
CODE	Width a=b mm	Radius R mm	Kg 1pc	pcs	
MIS60R4 810 15 HDG	100	600	3.94	1	
MIS60R4 815 15 HDG	150	600	4.13	1	
MIS60R4 820 15 HDG	200	600	4.31	1	
MIS60R4 825 15 HDG	250	600	4.49	1	
MIS60R4 830 15 HDG	300	600	4.68	1	
MIS60R4 840 15 HDG	400	600	5.04	1	
MIS60R4 845 15 HDG	450	600	5.23	1	
MIS60R4 850 15 HDG	500	600	5.41	1	
MIS60R4 860 15 HDG	600	600	5.78	1	
MIS60R4 870 15 HDG	700	600	6.15	1	
MIS60R4 875 15 HDG	750	600	6.33	1	
MIS60R4 880 15 HDG	800	600	6.51	1	
MIS60R4 890 15 HDG	900	600	6.88	1	
MIS60R4 800 15 HDG	1000	600	7.25	1	
MIS60R4 802 15 HDG	1200	600	7.98	1	

MIS60R4... H80		2.0mm			
CODE	Width a=b mm	Radius R mm	Kg 1pc	pcs	
MISR4 810 20 HDG	100	600	5.25	1	
MISR4 815 20 HDG	150	600	5.50	1	
MISR4 820 20 HDG	200	600	5.74	1	
MISR4 825 20 HDG	250	600	5.99	1	
MISR4 830 20 HDG	300	600	6.23	1	
MISR4 840 20 HDG	400	600	6.72	1	
MISR4 845 20 HDG	450	600	6.97	1	
MISR4 850 20 HDG	500	600	7.21	1	
MISR4 860 20 HDG	600	600	7.70	1	
MISR4 870 20 HDG	700	600	8.19	1	
MISR4 875 20 HDG	750	600	8.44	1	
MISR4 880 20 HDG	800	600	8.68	1	
MISR4 890 20 HDG	900	600	9.17	1	
MISR4 800 20 HDG	1000	600	9.66	1	
MISR4 802 20 HDG	1200	600	10.64	1	

MIS60R3 H80 HDG

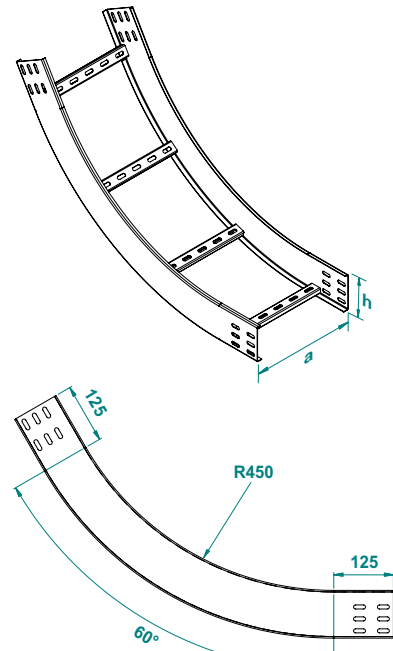

MIS60R4 H80 HDG

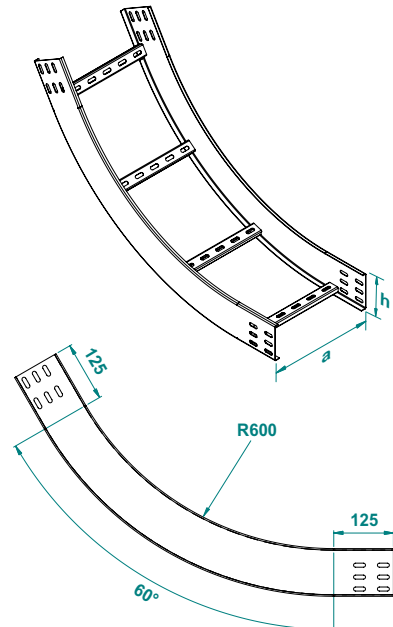

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method
to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: **1.5 2.0**

Cable Ladder Systems of Side Height 80



Vertical 45° Inside Bend of Cable Ladder (stable)

45° Dikey Merdiven İç Bükey Elemanı-(Sabit) - Арка фиксированная кабельроста, внутренняя 45°



Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8


Hot-Dip Galvanized

MIS45... H80		1.5mm	
CODE	Width a=b mm	Radius R mm	kg 1pc
MIS45 810 15 HDG	100	150	0.98
MIS45 815 15 HDG	150	150	1.06
MIS45 820 15 HDG	200	150	1.15
MIS45 825 15 HDG	250	150	1.23
MIS45 830 15 HDG	300	150	1.31
MIS45 840 15 HDG	400	150	1.48
MIS45 845 15 HDG	450	150	1.56
MIS45 850 15 HDG	500	150	1.64
MIS45 860 15 HDG	600	150	1.81
MIS45 870 15 HDG	700	150	1.97
MIS45 875 15 HDG	750	150	2.05
MIS45 880 15 HDG	800	150	2.14
MIS45 890 15 HDG	900	150	2.30
MIS45 800 15 HDG	1000	150	2.47
MIS45 802 15 HDG	1200	150	2.80

MIS45... H80		2.0mm	
CODE	Width a=b mm	Radius R mm	kg 1pc
MIS45 810 20 HDG	100	150	1.31
MIS45 815 20 HDG	150	150	1.42
MIS45 820 20 HDG	200	150	1.53
MIS45 825 20 HDG	250	150	1.64
MIS45 830 20 HDG	300	150	1.75
MIS45 840 20 HDG	400	150	1.97
MIS45 845 20 HDG	450	150	2.08
MIS45 850 20 HDG	500	150	2.19
MIS45 860 20 HDG	600	150	2.41
MIS45 870 20 HDG	700	150	2.63
MIS45 875 20 HDG	750	150	2.74
MIS45 880 20 HDG	800	150	2.85
MIS45 890 20 HDG	900	150	3.07
MIS45 800 20 HDG	1000	150	3.29
MIS45 802 20 HDG	1200	150	3.73

Vertical 45° Inside Bend of Cable Ladder (stable) Radius:300

45° Dikey Merdiven İç Bükey Elemanı-(Sabit) Radyus:300 - Арка фиксированная кабельроста, внутренняя 45° радиус:300

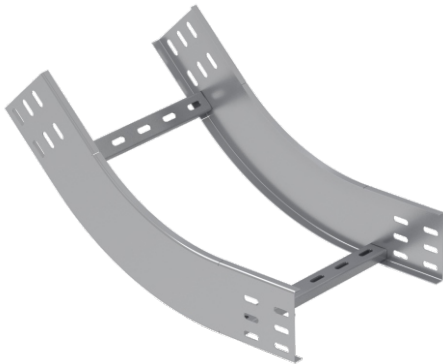

Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized



MIS45R2... H80		1.5mm	
CODE	Width a=b mm	Radius R mm	kg 1pc
MIS45R2 810 15 HDG	100	300	1.99
MIS45R2 815 15 HDG	150	300	2.08
MIS45R2 820 15 HDG	200	300	2.17
MIS45R2 825 15 HDG	250	300	2.26
MIS45R2 830 15 HDG	300	300	2.36
MIS45R2 840 15 HDG	400	300	2.54
MIS45R2 845 15 HDG	450	300	2.63
MIS45R2 850 15 HDG	500	300	2.72
MIS45R2 860 15 HDG	600	300	2.91
MIS45R2 870 15 HDG	700	300	3.09
MIS45R2 875 15 HDG	750	300	3.18
MIS45R2 880 15 HDG	800	300	3.27
MIS45R2 890 15 HDG	900	300	3.46
MIS45R2 800 15 HDG	1000	300	3.64
MIS45R2 802 15 HDG	1200	300	4.01

MIS45R2... H80		2.0mm	
CODE	Width a=b mm	Radius R mm	kg 1pc
MIS45R2 810 20 HDG	100	300	2.65
MIS45R2 815 20 HDG	150	300	2.77
MIS45R2 820 20 HDG	200	300	2.89
MIS45R2 825 20 HDG	250	300	3.02
MIS45R2 830 20 HDG	300	300	3.14
MIS45R2 840 20 HDG	400	300	3.38
MIS45R2 845 20 HDG	450	300	3.51
MIS45R2 850 20 HDG	500	300	3.63
MIS45R2 860 20 HDG	600	300	3.87
MIS45R2 870 20 HDG	700	300	4.12
MIS45R2 875 20 HDG	750	300	4.24
MIS45R2 880 20 HDG	800	300	4.36
MIS45R2 890 20 HDG	900	300	4.61
MIS45R2 800 20 HDG	1000	300	4.85
MIS45R2 802 20 HDG	1200	300	5.34

MIS45 H80HDG

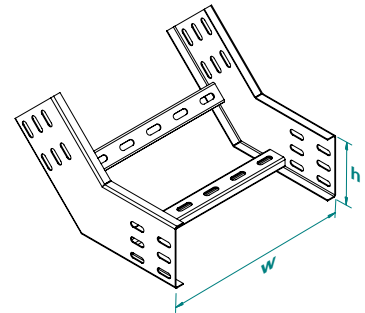

MIS45R2 H80 HDG

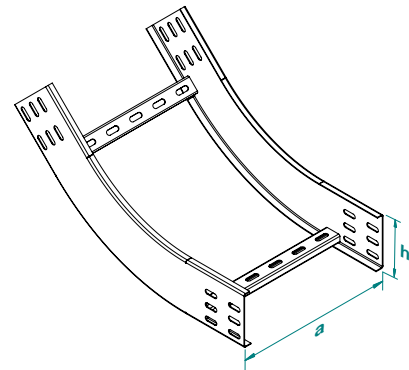

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method
to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0


Cable Ladder Systems of Side Height 80



MTK
MADE IN TURKEY

Vertical 45° Inside Bend of Cable Ladder (stable) Radius:450

45° Dikey Merdiven İç Bükey Elemanı-(Sabit) Radyus:450 - Арка фиксированная кабельроста, внутренняя 45° радиус:450

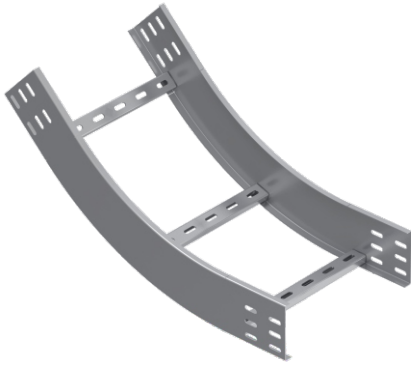

Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8


Hot-Dip Galvanized

MIS45R3... H80		1.5mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
MIS45R3 810 15 HDG	100	450	2.50	1	
MIS45R3 815 15 HDG	150	450	2.64	1	
MIS45R3 820 15 HDG	200	450	2.78	1	
MIS45R3 825 15 HDG	250	450	2.91	1	
MIS45R3 830 15 HDG	300	450	3.05	1	
MIS45R3 840 15 HDG	400	450	3.33	1	
MIS45R3 845 15 HDG	450	450	3.46	1	
MIS45R3 850 15 HDG	500	450	3.60	1	
MIS45R3 860 15 HDG	600	450	3.88	1	
MIS45R3 870 15 HDG	700	450	4.15	1	
MIS45R3 875 15 HDG	750	450	4.29	1	
MIS45R3 880 15 HDG	800	450	4.43	1	
MIS45R3 890 15 HDG	900	450	4.70	1	
MIS45R3 800 15 HDG	1000	450	4.98	1	
MIS45R3 802 15 HDG	1200	450	5.53	1	

MIS45R3... H80		2.0mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
MIS45R3 810 20 HDG	100	450	3.33	1	
MIS45R3 815 20 HDG	150	450	3.52	1	
MIS45R3 820 20 HDG	200	450	3.70	1	
MIS45R3 825 20 HDG	250	450	3.88	1	
MIS45R3 830 20 HDG	300	450	4.07	1	
MIS45R3 840 20 HDG	400	450	4.43	1	
MIS45R3 845 20 HDG	450	450	4.62	1	
MIS45R3 850 20 HDG	500	450	4.80	1	
MIS45R3 860 20 HDG	600	450	5.17	1	
MIS45R3 870 20 HDG	700	450	5.54	1	
MIS45R3 875 20 HDG	750	450	5.72	1	
MIS45R3 880 20 HDG	800	450	5.90	1	
MIS45R3 890 20 HDG	900	450	6.27	1	
MIS45R3 800 20 HDG	1000	450	6.64	1	
MIS45R3 802 20 HDG	1200	450	7.37	1	

Vertical 45° Inside Bend of Cable Ladder (stable) Radius:600

45° Dikey Merdiven İç Bükey Elemanı-(Sabit) Radyus:600 - Арка фиксированная кабельроста, внутренняя 45° радиус:600

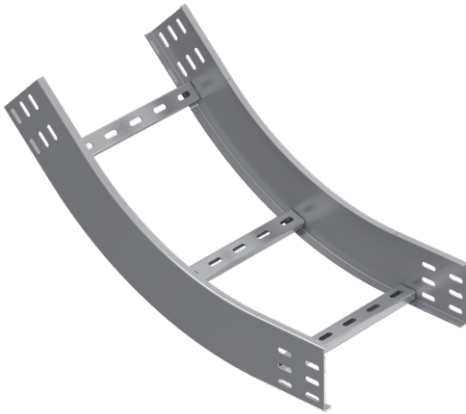

Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized



MIS45R4... H80		1.5mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
MIS45R4 810 15 HDG	100	600	3.10	1	
MIS45R4 815 15 HDG	150	600	3.24	1	
MIS45R4 820 15 HDG	200	600	3.38	1	
MIS45R4 825 15 HDG	250	600	3.51	1	
MIS45R4 830 15 HDG	300	600	3.65	1	
MIS45R4 840 15 HDG	400	600	3.93	1	
MIS45R4 845 15 HDG	450	600	4.06	1	
MIS45R4 850 15 HDG	500	600	4.20	1	
MIS45R4 860 15 HDG	600	600	4.48	1	
MIS45R4 870 15 HDG	700	600	4.75	1	
MIS45R4 875 15 HDG	750	600	4.89	1	
MIS45R4 880 15 HDG	800	600	5.03	1	
MIS45R4 890 15 HDG	900	600	5.30	1	
MIS45R4 800 15 HDG	1000	600	5.58	1	
MIS45R4 802 15 HDG	1200	600	6.13	1	

MIS45R4... H80		2.0mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
MIS45R4 810 20 HDG	100	600	4.13	1	
MIS45R4 815 20 HDG	150	600	4.32	1	
MIS45R4 820 20 HDG	200	600	4.50	1	
MIS45R4 825 20 HDG	250	600	4.68	1	
MIS45R4 830 20 HDG	300	600	4.87	1	
MIS45R4 840 20 HDG	400	600	5.23	1	
MIS45R4 845 20 HDG	450	600	5.42	1	
MIS45R4 850 20 HDG	500	600	5.60	1	
MIS45R4 860 20 HDG	600	600	5.97	1	
MIS45R4 870 20 HDG	700	600	6.34	1	
MIS45R4 875 20 HDG	750	600	6.52	1	
MIS45R4 880 20 HDG	800	600	6.70	1	
MIS45R4 890 20 HDG	900	600	7.07	1	
MIS45R4 800 20 HDG	1000	600	7.44	1	
MIS45R4 802 20 HDG	1200	600	8.17	1	

MIS45R3 H80 HDG

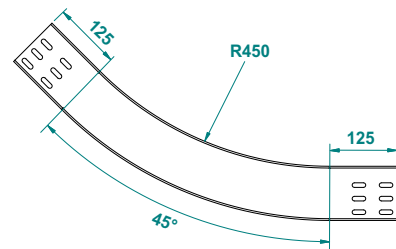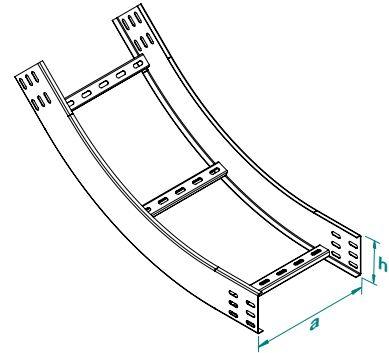

MIS45R4 H80 HDG

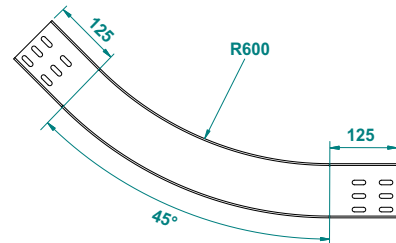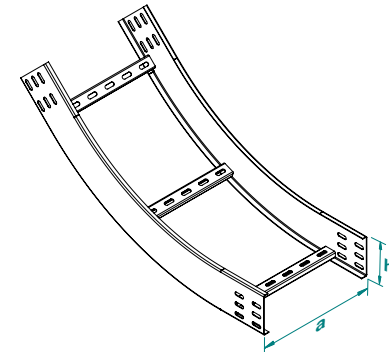

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method

to TS-EN 10346:2011 (PG)

SS- stainless steel AISI 304L and AISI 316L (SS)

EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0


Cable Ladder Systems of Side Height 80



MTK
MADE IN TURKEY

Vertical 30° Inside Bend of Cable Ladder (stable)

30° Dikey Merdiven İç Bükey Elemanı-(Sabit) - Арка фиксированная кабельроста, внутренняя 30°

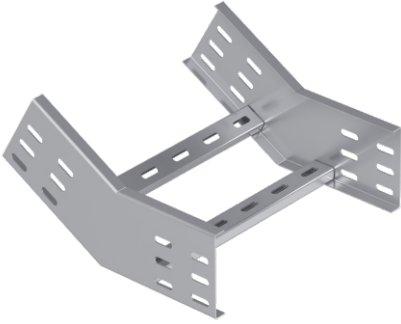

Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8


Hot-Dip Galvanized

MIS30... H80		1.5mm	
CODE	Width a=b mm	Radius R mm	kg 1pc
MIS30 810 15 HDG	100	150	0.98
MIS30 815 15 HDG	150	150	1.06
MIS30 820 15 HDG	200	150	1.15
MIS30 825 15 HDG	250	150	1.23
MIS30 830 15 HDG	300	150	1.31
MIS30 840 15 HDG	400	150	1.48
MIS30 845 15 HDG	450	150	1.56
MIS30 850 15 HDG	500	150	1.64
MIS30 860 15 HDG	600	150	1.81
MIS30 870 15 HDG	700	150	1.97
MIS30 875 15 HDG	750	150	2.05
MIS30 880 15 HDG	800	150	2.14
MIS30 890 15 HDG	900	150	2.30
MIS30 800 15 HDG	1000	150	2.47
MIS30 802 15 HDG	1200	150	2.80

MIS30... H80		2.0mm	
CODE	Width a=b mm	Radius R mm	kg 1pc
MIS30 810 20 HDG	100	150	1.31
MIS30 815 20 HDG	150	150	1.42
MIS30 820 20 HDG	200	150	1.53
MIS30 825 20 HDG	250	150	1.64
MIS30 830 20 HDG	300	150	1.75
MIS30 840 20 HDG	400	150	1.97
MIS30 845 20 HDG	450	150	2.08
MIS30 850 20 HDG	500	150	2.19
MIS30 860 20 HDG	600	150	2.41
MIS30 870 20 HDG	700	150	2.63
MIS30 875 20 HDG	750	150	2.74
MIS30 880 20 HDG	800	150	2.85
MIS30 890 20 HDG	900	150	3.07
MIS30 800 20 HDG	1000	150	3.29
MIS30 802 20 HDG	1200	150	3.73

Vertical 30° Inside Bend of Cable Ladder (stable) Radius:300

30° Dikey Merdiven İç Bükey Elemanı-(Sabit) Radyus:300 - Арка фиксированная кабельроста, внутренняя 30° радиус:300

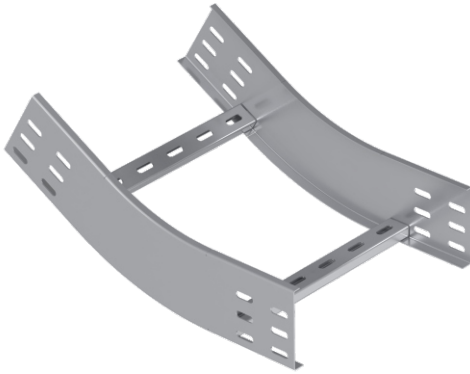

Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized



MIS30R2... H80		1.5mm	
CODE	Width a=b mm	Radius R mm	kg 1pc
MIS30R2 810 15 HDG	100	300	1.24
MIS30R2 815 15 HDG	150	300	1.33
MIS30R2 820 15 HDG	200	300	1.42
MIS30R2 825 15 HDG	250	300	1.51
MIS30R2 830 15 HDG	300	300	1.61
MIS30R2 840 15 HDG	400	300	1.79
MIS30R2 845 15 HDG	450	300	1.88
MIS30R2 850 15 HDG	500	300	1.97
MIS30R2 860 15 HDG	600	300	2.16
MIS30R2 870 15 HDG	700	300	2.34
MIS30R2 875 15 HDG	750	300	2.43
MIS30R2 880 15 HDG	800	300	2.52
MIS30R2 890 15 HDG	900	300	2.71
MIS30R2 800 15 HDG	1000	300	2.89
MIS30R2 802 15 HDG	1200	300	3.26

MIS30R2... H80		2.0mm	
CODE	Width a=b mm	Radius R mm	kg 1pc
MIS30R2 810 20 HDG	100	300	1.65
MIS30R2 815 20 HDG	150	300	1.77
MIS30R2 820 20 HDG	200	300	1.89
MIS30R2 825 20 HDG	250	300	2.02
MIS30R2 830 20 HDG	300	300	2.14
MIS30R2 840 20 HDG	400	300	2.38
MIS30R2 845 20 HDG	450	300	2.51
MIS30R2 850 20 HDG	500	300	2.63
MIS30R2 860 20 HDG	600	300	2.87
MIS30R2 870 20 HDG	700	300	3.12
MIS30R2 875 20 HDG	750	300	3.24
MIS30R2 880 20 HDG	800	300	3.36
MIS30R2 890 20 HDG	900	300	3.61
MIS30R2 800 20 HDG	1000	300	3.85
MIS30R2 802 20 HDG	1200	300	4.34

MIS30 H80 HDG

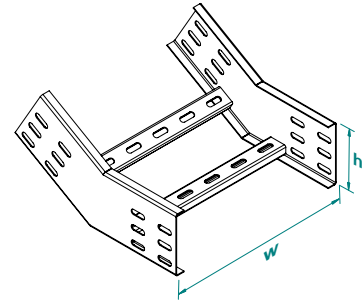

MIS30R2 H80 HDG

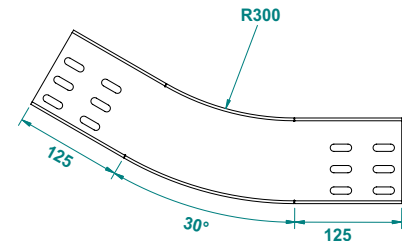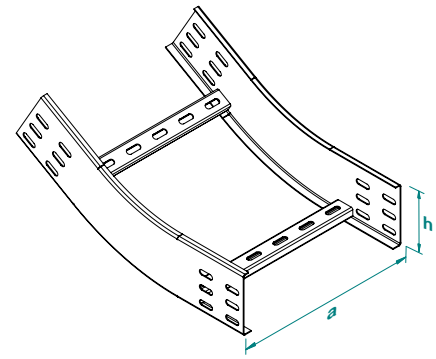

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method
to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0


Cable Ladder Systems of Side Height 80



MTK
MADE IN TURKEY

Vertical 30° Inside Bend of Cable Ladder (stable) Radius:450

30° Dikey Merdiven İç Bükey Elemanı-(Sabit) Radyus:450 - Арка фиксированная кабельроста, внутренняя 30° радиус:450

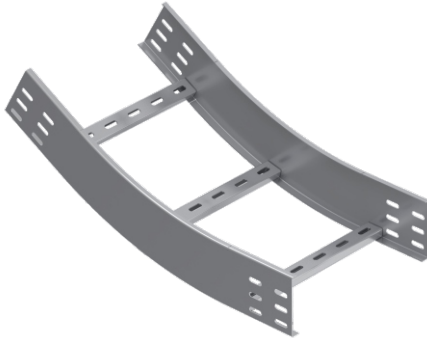

Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8


Hot-Dip Galvanized

MIS30R3... H80		1.5mm	
CODE	Width a=b mm	Radius R mm	kg 1pc
MIS30R3 810 15 HDG	100	450	1.39
MIS30R3 815 15 HDG	150	450	1.48
MIS30R3 820 15 HDG	200	450	1.57
MIS30R3 825 15 HDG	250	450	1.66
MIS30R3 830 15 HDG	300	450	1.76
MIS30R3 840 15 HDG	400	450	1.94
MIS30R3 845 15 HDG	450	450	2.03
MIS30R3 850 15 HDG	500	450	2.12
MIS30R3 860 15 HDG	600	450	2.31
MIS30R3 870 15 HDG	700	450	2.49
MIS30R3 875 15 HDG	750	450	2.58
MIS30R3 880 15 HDG	800	450	2.67
MIS30R3 890 15 HDG	900	450	2.86
MIS30R3 800 15 HDG	1000	450	3.04
MIS30R3 802 15 HDG	1200	450	3.41

MIS30R3... H80		2.0mm	
CODE	Width a=b mm	Radius R mm	kg 1pc
MIS30R3 810 20 HDG	100	450	1.85
MIS30R3 815 20 HDG	150	450	1.97
MIS30R3 820 20 HDG	200	450	2.09
MIS30R3 825 20 HDG	250	450	2.22
MIS30R3 830 20 HDG	300	450	2.34
MIS30R3 840 20 HDG	400	450	2.58
MIS30R3 845 20 HDG	450	450	2.71
MIS30R3 850 20 HDG	500	450	2.83
MIS30R3 860 20 HDG	600	450	3.07
MIS30R3 870 20 HDG	700	450	3.32
MIS30R3 875 20 HDG	750	450	3.44
MIS30R3 880 20 HDG	800	450	3.56
MIS30R3 890 20 HDG	900	450	3.81
MIS30R3 800 20 HDG	1000	450	4.05
MIS30R3 802 20 HDG	1200	450	4.54

Vertical 30° Inside Bend of Cable Ladder (stable) Radius:600

30° Dikey Merdiven İç Bükey Elemanı-(Sabit) Radyus:600 - Арка фиксированная кабельроста, внутренняя 30° радиус:600

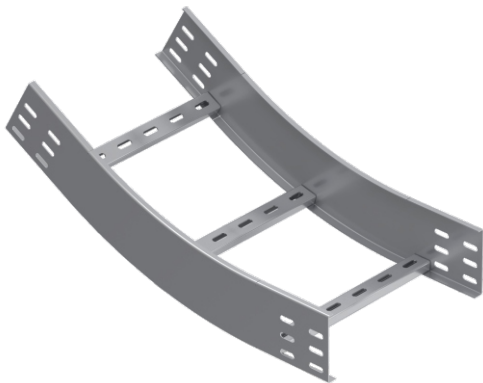

Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized



MIS30R4... H80		1.5mm	
CODE	Width a=b mm	Radius R mm	kg 1pc
MIS30R4 810 15 HDG	100	600	2.35
MIS30R4 815 15 HDG	150	600	2.49
MIS30R4 820 15 HDG	200	600	2.63
MIS30R4 825 15 HDG	250	600	2.76
MIS30R4 830 15 HDG	300	600	2.90
MIS30R4 840 15 HDG	400	600	3.18
MIS30R4 845 15 HDG	450	600	3.31
MIS30R4 850 15 HDG	500	600	3.45
MIS30R4 860 15 HDG	600	600	3.73
MIS30R4 870 15 HDG	700	600	4.00
MIS30R4 875 15 HDG	750	600	4.14
MIS30R4 880 15 HDG	800	600	4.28
MIS30R4 890 15 HDG	900	600	4.55
MIS30R4 800 15 HDG	1000	600	4.83
MIS30R4 802 15 HDG	1200	600	5.38

MIS30R4... H80		2.0mm	
CODE	Width a=b mm	Radius R mm	kg 1pc
MIS30R4 810 20 HDG	100	600	3.13
MIS30R4 815 20 HDG	150	600	3.32
MIS30R4 820 20 HDG	200	600	3.50
MIS30R4 825 20 HDG	250	600	3.68
MIS30R4 830 20 HDG	300	600	3.87
MIS30R4 840 20 HDG	400	600	4.23
MIS30R4 845 20 HDG	450	600	4.42
MIS30R4 850 20 HDG	500	600	4.60
MIS30R4 860 20 HDG	600	600	4.97
MIS30R4 870 20 HDG	700	600	5.34
MIS30R4 875 20 HDG	750	600	5.52
MIS30R4 880 20 HDG	800	600	5.70
MIS30R4 890 20 HDG	900	600	6.07
MIS30R4 800 20 HDG	1000	600	6.44
MIS30R4 802 20 HDG	1200	600	7.17

MIS30R3 H80 HDG

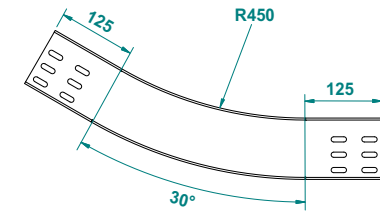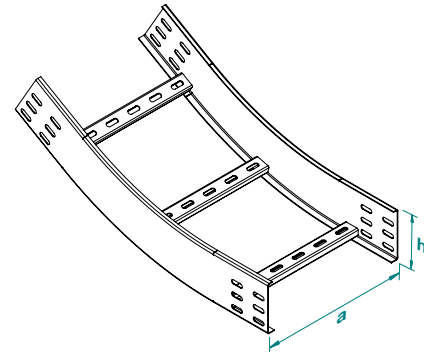

MIS30R4 H80 HDG

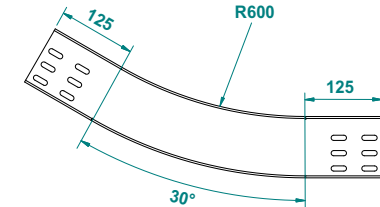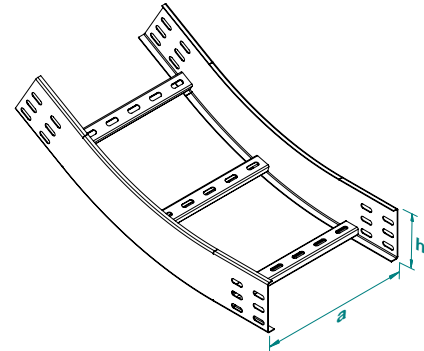

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method
to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0


Cable Ladder Systems of Side Height 80



MTK
MADE IN TURKEY

Vertical 90° Outside Bend of Cable Ladder (stable)

90° Dikey Merdiven Dış Bükey Elemanı-(Sabit) - Арка фиксированная кабельроста, внешняя 90°

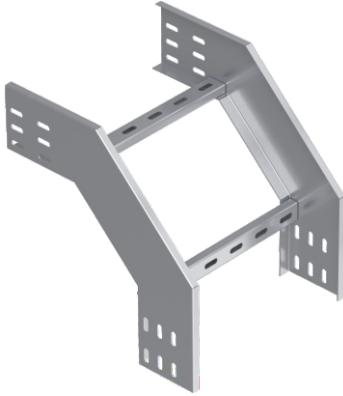

Hot-Dip Galvanized

Important!


To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

MDS... H80		1.5mm	
CODE	Width a=b mm	Radius R mm	kg 1pc
MDS 810 15 HDG	100	150	1.74
MDS 815 15 HDG	150	150	1.87
MDS 820 15 HDG	200	150	1.99
MDS 825 15 HDG	250	150	2.11
MDS 830 15 HDG	300	150	2.24
MDS 840 15 HDG	400	150	2.48
MDS 845 15 HDG	450	150	2.61
MDS 850 15 HDG	500	150	2.73
MDS 860 15 HDG	600	150	2.98
MDS 870 15 HDG	700	150	3.23
MDS 875 15 HDG	750	150	3.35
MDS 880 15 HDG	800	150	3.47
MDS 890 15 HDG	900	150	3.72
MDS 800 15 HDG	1000	150	3.97
MDS 802 15 HDG	1200	150	4.46

MDS... H80		2.0mm	
CODE	Width a=b mm	Radius R mm	kg 1pc
MDS 810 20 HDG	100	150	2.32
MDS 815 20 HDG	150	150	2.49
MDS 820 20 HDG	200	150	2.65
MDS 825 20 HDG	250	150	2.82
MDS 830 20 HDG	300	150	2.98
MDS 840 20 HDG	400	150	3.31
MDS 845 20 HDG	450	150	3.47
MDS 850 20 HDG	500	150	3.64
MDS 860 20 HDG	600	150	3.97
MDS 870 20 HDG	700	150	4.30
MDS 875 20 HDG	750	150	4.46
MDS 880 20 HDG	800	150	4.63
MDS 890 20 HDG	900	150	4.96
MDS 800 20 HDG	1000	150	5.29
MDS 802 20 HDG	1200	150	5.95

Vertical 90° Outside Bend of Cable Ladder (stable) Radius:300

90° Dikey Merdiven Dış Bükey Elemanı-(Sabit) Radyus:300 - Арка фиксированная кабельроста, внешняя 90° радиус:300

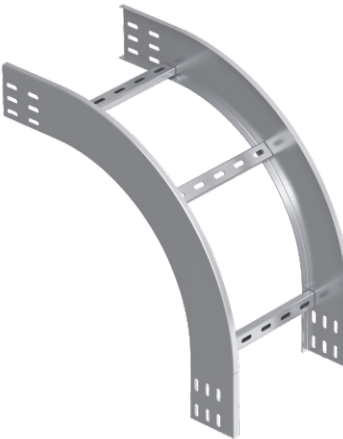

Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized



MDSR2... H80		1.5mm	
CODE	Width a=b mm	Radius R mm	kg 1pc
MDSR2 110 15 HDG	100	300	3.58
MDSR2 115 15 HDG	150	300	3.72
MDSR2 120 15 HDG	200	300	3.86
MDSR2 125 15 HDG	250	300	3.99
MDSR2 130 15 HDG	300	300	4.13
MDSR2 140 15 HDG	400	300	4.41
MDSR2 145 15 HDG	450	300	4.54
MDSR2 150 15 HDG	500	300	4.68
MDSR2 160 15 HDG	600	300	4.96
MDSR2 170 15 HDG	700	300	5.23
MDSR2 175 15 HDG	750	300	5.37
MDSR2 180 15 HDG	800	300	5.51
MDSR2 190 15 HDG	900	300	5.78
MDSR2 100 15 HDG	1000	300	6.06
MDSR2 102 15 HDG	1200	300	6.61

MDSR2... H80		2.0mm	
CODE	Width a=b mm	Radius R mm	kg 1pc
MDSR2 110 20 HDG	100	300	4.77
MDSR2 115 20 HDG	150	300	4.96
MDSR2 120 20 HDG	200	300	5.14
MDSR2 125 20 HDG	250	300	5.32
MDSR2 130 20 HDG	300	300	5.51
MDSR2 140 20 HDG	400	300	5.87
MDSR2 145 20 HDG	450	300	6.06
MDSR2 150 20 HDG	500	300	6.24
MDSR2 160 20 HDG	600	300	6.61
MDSR2 170 20 HDG	700	300	6.98
MDSR2 175 20 HDG	750	300	7.16
MDSR2 180 20 HDG	800	300	7.34
MDSR2 190 20 HDG	900	300	7.71
MDSR2 100 20 HDG	1000	300	8.08
MDSR2 102 20 HDG	1200	300	8.81

MDS H80 HDG



MDSR2 H80 HDG

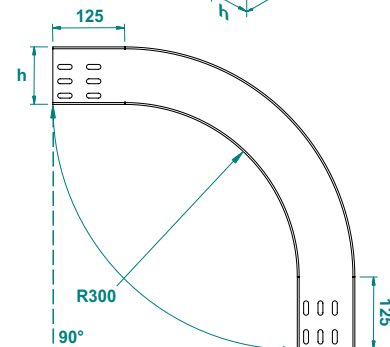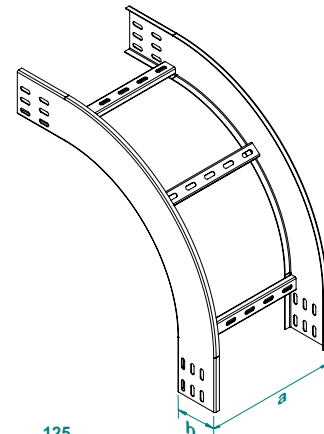

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method
to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0


Cable Ladder Systems of Side Height 80



MTK
MADE IN TURKEY

Vertical 90° Outside Bend of Cable Ladder (stable) Radius:450

90° Dikey Merdiven Dış Bükey Elemanı-(Sabit) Radyus:450 - Арка фиксированная кабельроста, внешняя 90° радиус:450

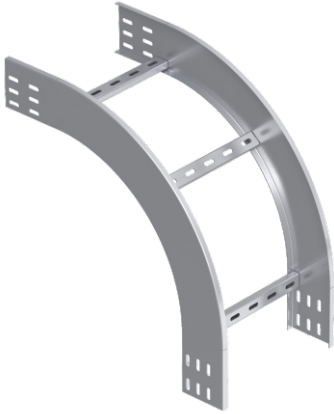

Hot-Dip Galvanized

Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

MDSR3... H80		1.5mm	
CODE	Width a=b mm	Radius R mm	kg 1pc
MDSR3 810 15 HDG	100	450	4.63
MDSR3 815 15 HDG	150	450	4.82
MDSR3 820 15 HDG	200	450	5.00
MDSR3 825 15 HDG	250	450	5.18
MDSR3 830 15 HDG	300	450	5.37
MDSR3 840 15 HDG	400	450	5.73
MDSR3 845 15 HDG	450	450	5.92
MDSR3 850 15 HDG	500	450	6.10
MDSR3 860 15 HDG	600	450	6.47
MDSR3 870 15 HDG	700	450	6.84
MDSR3 875 15 HDG	750	450	7.02
MDSR3 880 15 HDG	800	450	7.20
MDSR3 890 15 HDG	900	450	7.57
MDSR3 800 15 HDG	1000	450	7.94
MDSR3 802 15 HDG	1200	450	8.67

MDSR3... H80		2.0mm	
CODE	Width a=b mm	Radius R mm	kg 1pc
MDSR3 810 20 HDG	100	450	6.17
MDSR3 815 20 HDG	150	450	6.42
MDSR3 820 20 HDG	200	450	6.66
MDSR3 825 20 HDG	250	450	6.91
MDSR3 830 20 HDG	300	450	7.15
MDSR3 840 20 HDG	400	450	7.94
MDSR3 845 20 HDG	450	450	7.89
MDSR3 850 20 HDG	500	450	8.13
MDSR3 860 20 HDG	600	450	8.62
MDSR3 870 20 HDG	700	450	9.11
MDSR3 875 20 HDG	750	450	9.36
MDSR3 880 20 HDG	800	450	9.60
MDSR3 890 20 HDG	900	450	10.09
MDSR3 800 20 HDG	1000	450	11.58
MDSR3 802 20 HDG	1200	450	11.56

Vertical 90° Outside Bend of Cable Ladder (stable) Radius:600

90° Dikey Merdiven Dış Bükey Elemanı-(Sabit) Radyus:600 - Арка фиксированная кабельроста, внешняя 90° радиус:600



Hot-Dip Galvanized



Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8


MDSR4... H80		1.5mm	
CODE	Width a=b mm	Radius R mm	kg 1pc
MDSR4 810 15 HDG	100	600	5.80
MDSR4 815 15 HDG	150	600	6.03
MDSR4 820 15 HDG	200	600	6.26
MDSR4 825 15 HDG	250	600	6.49
MDSR4 830 15 HDG	300	600	6.72
MDSR4 840 15 HDG	400	600	7.18
MDSR4 845 15 HDG	450	600	7.41
MDSR4 850 15 HDG	500	600	7.64
MDSR4 860 15 HDG	600	600	8.10
MDSR4 870 15 HDG	700	600	8.56
MDSR4 875 15 HDG	750	600	8.79
MDSR4 880 15 HDG	800	600	9.02
MDSR4 890 15 HDG	900	600	9.48
MDSR4 800 15 HDG	1000	600	9.94
MDSR4 802 15 HDG	1200	600	10.86

MDSR4... H80		2.0mm	
CODE	Width a=b mm	Radius R mm	kg 1pc
MDSR4 810 20 HDG	100	600	7.74
MDSR4 815 20 HDG	150	600	8.04
MDSR4 820 20 HDG	200	600	8.35
MDSR4 825 20 HDG	250	600	8.66
MDSR4 830 20 HDG	300	600	8.96
MDSR4 840 20 HDG	400	600	9.57
MDSR4 845 20 HDG	450	600	9.88
MDSR4 850 20 HDG	500	600	10.19
MDSR4 860 20 HDG	600	600	10.80
MDSR4 870 20 HDG	700	600	11.41
MDSR4 875 20 HDG	750	600	11.72
MDSR4 880 20 HDG	800	600	12.02
MDSR4 890 20 HDG	900	600	12.64
MDSR4 800 20 HDG	1000	600	13.25
MDSR4 802 20 HDG	1200	600	14.47

MDSR3 H80 HDG

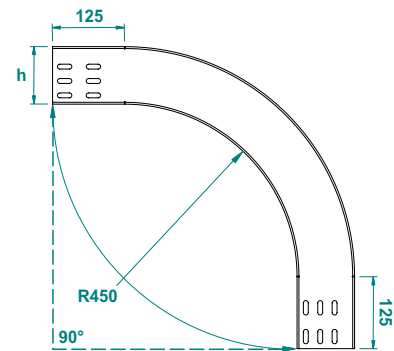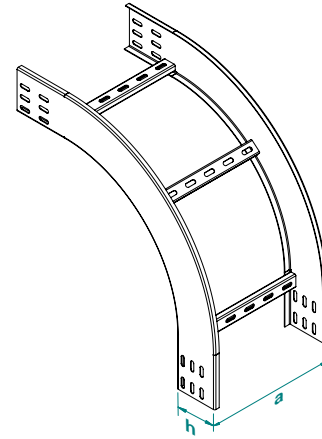

MDSR4 H80 HDG

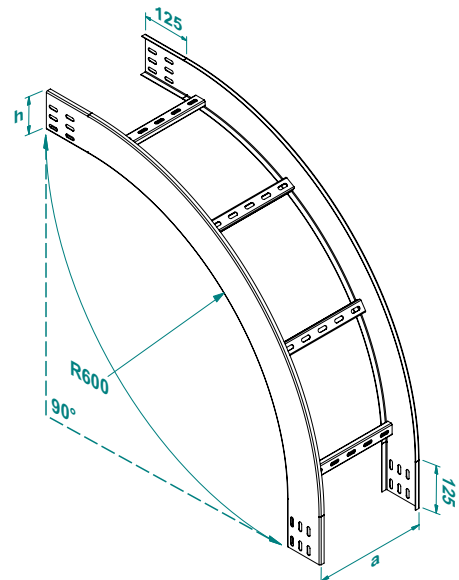

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0


Cable Ladder Systems of Side Height 80



MTK
MADE IN TURKEY

Vertical 60° Outside Bend of Cable Ladder (stable)

60° Dikey Merdiven Dış Bükey Elemanı-(Sabit) - Арка фиксированная кабельроста, внешняя 60°



Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized

MDS60... H80		1.5mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
MDS60 110 15 HDG	100	150	1.61	1	
MDS60 115 15 HDG	150	150	1.73	1	
MDS60 120 15 HDG	200	150	1.85	1	
MDS60 125 15 HDG	250	150	1.98	1	
MDS60 130 15 HDG	300	150	2.10	1	
MDS60 140 15 HDG	400	150	2.35	1	
MDS60 145 15 HDG	450	150	2.47	1	
MDS60 150 15 HDG	500	150	2.60	1	
MDS60 160 15 HDG	600	150	2.84	1	
MDS60 170 15 HDG	700	150	3.09	1	
MDS60 175 15 HDG	750	150	3.21	1	
MDS60 180 15 HDG	800	150	3.34	1	
MDS60 190 15 HDG	900	150	3.58	1	
MDS60 100 15 HDG	1000	150	3.83	1	
MDS60 102 15 HDG	1200	150	4.33	1	

MDS60... H80		2.0mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
MDS60 110 20 HDG	100	150	2.14	1	
MDS60 115 20 HDG	150	150	2.31	1	
MDS60 120 20 HDG	200	150	2.47	1	
MDS60 125 20 HDG	250	150	2.63	1	
MDS60 130 20 HDG	300	150	2.80	1	
MDS60 140 20 HDG	400	150	3.13	1	
MDS60 145 20 HDG	450	150	3.29	1	
MDS60 150 20 HDG	500	150	3.46	1	
MDS60 160 20 HDG	600	150	3.79	1	
MDS60 170 20 HDG	700	150	4.12	1	
MDS60 175 20 HDG	750	150	4.28	1	
MDS60 180 20 HDG	800	150	4.45	1	
MDS60 190 20 HDG	900	150	4.78	1	
MDS60 100 20 HDG	1000	150	5.11	1	
MDS60 102 20 HDG	1200	150	5.77	1	

Vertical 60° Outside Bend of Cable Ladder (stable) Radius:300

60° Dikey Merdiven Dış Bükey Elemanı-(Sabit) Radyus:300 - Арка фиксированная кабельроста, внешняя 60° радиус:300



Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized



MDS60R2... H80		1.5mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
MDS60R2 810 15 HDG	100	300	3.19	1	
MDS60R2 815 15 HDG	150	300	3.33	1	
MDS60R2 820 15 HDG	200	300	3.47	1	
MDS60R2 825 15 HDG	250	300	3.60	1	
MDS60R2 830 15 HDG	300	300	3.74	1	
MDS60R2 840 15 HDG	400	300	4.02	1	
MDS60R2 845 15 HDG	450	300	4.15	1	
MDS60R2 850 15 HDG	500	300	4.29	1	
MDS60R2 860 15 HDG	600	300	4.57	1	
MDS60R2 870 15 HDG	700	300	4.84	1	
MDS60R2 875 15 HDG	750	300	4.98	1	
MDS60R2 880 15 HDG	800	300	5.12	1	
MDS60R2 890 15 HDG	900	300	5.39	1	
MDS60R2 800 15 HDG	1000	300	5.67	1	
MDS60R2 802 15 HDG	1200	300	6.22	1	

MDS60R2... H80		2.0mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
MDS60R2 810 20 HDG	100	300	3.77	1	
MDS60R2 815 20 HDG	150	300	3.96	1	
MDS60R2 820 20 HDG	200	300	4.14	1	
MDS60R2 825 20 HDG	250	300	4.32	1	
MDS60R2 830 20 HDG	300	300	4.51	1	
MDS60R2 840 20 HDG	400	300	4.87	1	
MDS60R2 845 20 HDG	450	300	5.06	1	
MDS60R2 850 20 HDG	500	300	5.24	1	
MDS60R2 860 20 HDG	600	300	5.61	1	
MDS60R2 870 20 HDG	700	300	5.98	1	
MDS60R2 875 20 HDG	750	300	6.16	1	
MDS60R2 880 20 HDG	800	300	6.34	1	
MDS60R2 890 20 HDG	900	300	6.71	1	
MDS60R2 800 20 HDG	1000	300	7.08	1	
MDS60R2 802 20 HDG	1200	300	7.81	1	

MDS60 H80 HDG

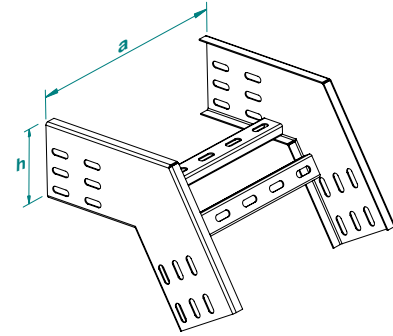

MDS60R2 H80 HDG

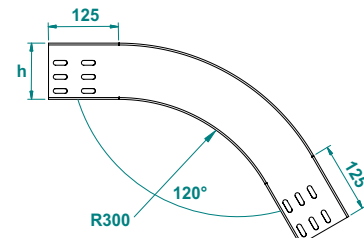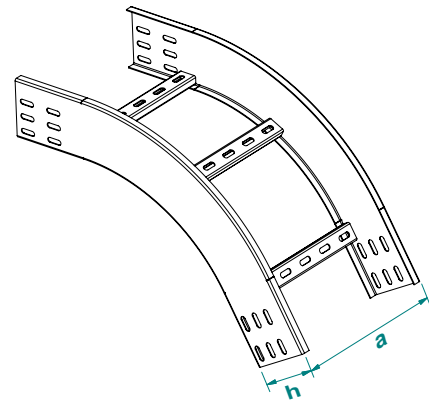

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method

to TS-EN 10346:2011 (PG)

SS- stainless steel AISI 304L and AISI 316L (SS)

EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0


Cable Ladder Systems of Side Height 80



MTK
MADE IN TURKEY

Vertical 60° Outside Bend of Cable Ladder (stable) Radius:450

90° Dikey Merdiven Dış Bükey Elemanı-(Sabit) Radyus:450 - Арка фиксированная кабельроста, внешняя 90° радиус:450

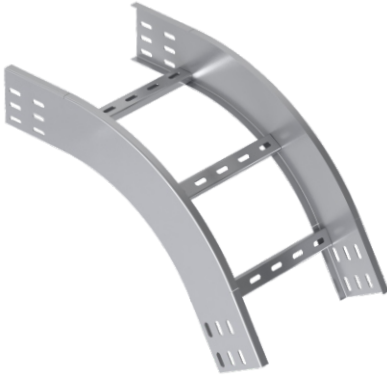

Hot-Dip Galvanized

Important!


To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

MDS60R3... H80		1.5mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
MDS60R3 810 15 HDG	100	450	3.52	1	
MDS60R3 815 15 HDG	150	450	3.66	1	
MDS60R3 820 15 HDG	200	450	3.80	1	
MDS60R3 825 15 HDG	250	450	3.93	1	
MDS60R3 830 15 HDG	300	450	4.07	1	
MDS60R3 840 15 HDG	400	450	4.35	1	
MDS60R3 845 15 HDG	450	450	4.48	1	
MDS60R3 850 15 HDG	500	450	4.62	1	
MDS60R3 860 15 HDG	600	450	4.90	1	
MDS60R3 870 15 HDG	700	450	5.17	1	
MDS60R2 875 15 HDG	750	450	5.31	1	
MDS60R2 880 15 HDG	800	450	5.45	1	
MDS60R2 890 15 HDG	900	450	5.72	1	
MDS60R2 800 15 HDG	1000	450	6.00	1	
MDS60R2 802 15 HDG	1200	450	6.55	1	

MDS60R3... H80		2.0mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
MDS60R3 810 20 HDG	100	450	4.69	1	
MDS60R3 815 20 HDG	150	450	4.88	1	
MDS60R3 820 20 HDG	200	450	5.06	1	
MDS60R3 825 20 HDG	250	450	5.24	1	
MDS60R3 830 20 HDG	300	450	5.43	1	
MDS60R3 840 20 HDG	400	450	5.79	1	
MDS60R3 845 20 HDG	450	450	5.98	1	
MDS60R3 850 20 HDG	500	450	6.16	1	
MDS60R3 860 20 HDG	600	450	6.53	1	
MDS60R3 870 20 HDG	700	450	6.90	1	
MDS60R3 875 20 HDG	750	450	7.08	1	
MDS60R3 880 20 HDG	800	450	7.26	1	
MDS60R3 890 20 HDG	900	450	7.63	1	
MDS60R3 810 20 HDG	1000	450	8.00	1	
MDS60R3 802 20 HDG	1200	450	8.73	1	

Vertical 60° Outside Bend of Cable Ladder (stable) Radius:600

60° Dikey Merdiven Dış Bükey Elemanı-(Sabit) Radyus:600 - Арка фиксированная кабельроста, внешняя 90° радиус:600

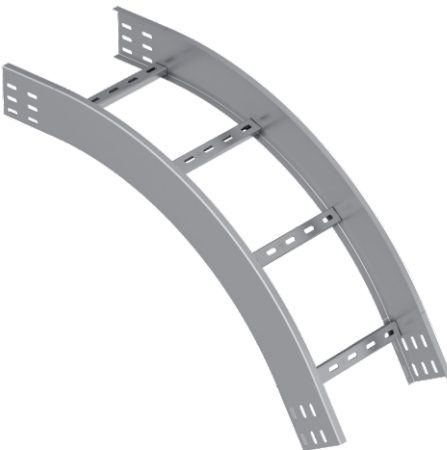

Hot-Dip Galvanized



Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8


MDS60R4... H80		1.5mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
MDS60R4 810 15 HDG	100	600	4.54	1	
MDS60R4 815 15 HDG	150	600	4.64	1	
MDS60R4 820 15 HDG	200	600	4.82	1	
MDS60R4 825 15 HDG	250	600	5.00	1	
MDS60R4 830 15 HDG	300	600	5.19	1	
MDS60R4 840 15 HDG	400	600	5.55	1	
MDS60R4 845 15 HDG	450	600	5.74	1	
MDS60R4 850 15 HDG	500	600	5.92	1	
MDS60R4 860 15 HDG	600	600	6.29	1	
MDS60R4 870 15 HDG	700	600	6.66	1	
MDS60R4 875 15 HDG	750	600	6.84	1	
MDS60R4 880 15 HDG	800	600	7.02	1	
MDS60R4 890 15 HDG	900	600	7.39	1	
MDS60R4 800 15 HDG	1000	600	7.76	1	
MDS60R4 802 15 HDG	1200	600	8.49	1	

MDS60R4... H80		2.0mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
MDS60R4 810 20 HDG	100	600	5.93	1	
MDS60R4 815 20 HDG	150	600	6.18	1	
MDS60R4 820 20 HDG	200	600	6.42	1	
MDS60R4 825 20 HDG	250	600	6.67	1	
MDS60R4 830 20 HDG	300	600	6.91	1	
MDS60R4 840 20 HDG	400	600	7.40	1	
MDS60R4 845 20 HDG	450	600	7.65	1	
MDS60R4 850 20 HDG	500	600	7.89	1	
MDS60R4 860 20 HDG	600	600	8.38	1	
MDS60R4 870 20 HDG	700	600	8.87	1	
MDS60R4 875 20 HDG	750	600	9.12	1	
MDS60R4 880 20 HDG	800	600	9.36	1	
MDS60R4 890 20 HDG	900	600	9.85	1	
MDS60R4 800 20 HDG	1000	600	10.34	1	
MDS60R4 802 20 HDG	1200	600	11.32	1	

MDS60R3 H80 HDG

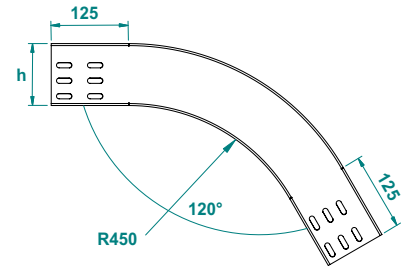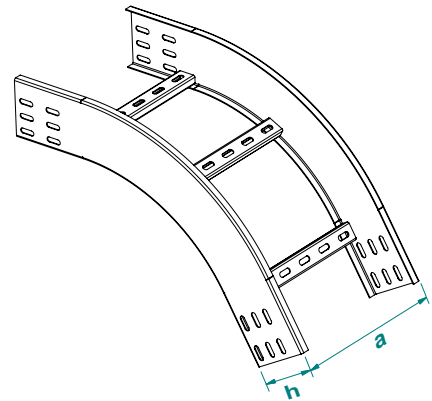

MDS60R4 H80 HDG

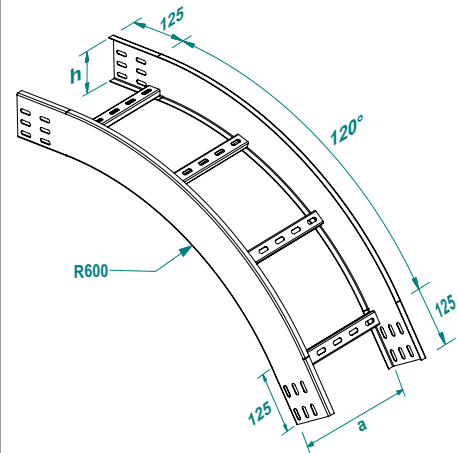

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: **1.5 2.0**


Cable Ladder Systems of Side Height 80



MTK
MADE IN TURKEY

Vertical 45° Outside Bend of Cable Ladder (stable)

45° Dikey Merdiven Dış Bükey Elemanı-(Sabit) - Арка фиксированная кабельроста, внешняя 45°

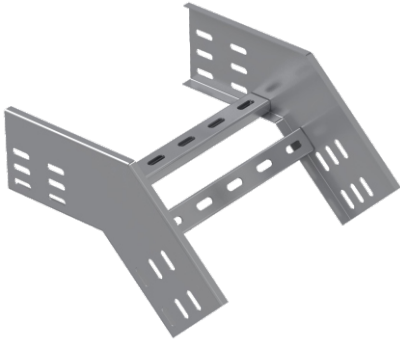

Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8


Hot-Dip Galvanized

MDS45... H80		1.5mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
MDS45 810 15 HDG	100	150	0.98	1	
MDS45 815 15 HDG	150	150	1.06	1	
MDS45 820 15 HDG	200	150	1.15	1	
MDS45 825 15 HDG	250	150	1.23	1	
MDS45 830 15 HDG	300	150	1.31	1	
MDS45 840 15 HDG	400	150	1.48	1	
MDS45 845 15 HDG	450	150	1.56	1	
MDS45 850 15 HDG	500	150	1.64	1	
MDS45 860 15 HDG	600	150	1.81	1	
MDS45 870 15 HDG	700	150	1.97	1	
MDS45 875 15 HDG	750	150	2.05	1	
MDS45 880 15 HDG	800	150	2.14	1	
MDS45 890 15 HDG	900	150	2.30	1	
MDS45 800 15 HDG	1000	150	2.47	1	
MDS45 802 15 HDG	1200	150	2.80	1	

MDS45... H80		2.0mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
MDS45 110 20 HDG	100	150	1.31	1	
MDS45 115 20 HDG	150	150	1.42	1	
MDS45 120 20 HDG	200	150	1.53	1	
MDS45 125 20 HDG	250	150	1.64	1	
MDS45 130 20 HDG	300	150	1.75	1	
MDS45 140 20 HDG	400	150	1.97	1	
MDS45 145 20 HDG	450	150	2.08	1	
MDS45 150 20 HDG	500	150	2.19	1	
MDS45 160 20 HDG	600	150	2.41	1	
MDS45 170 20 HDG	700	150	2.63	1	
MDS45 175 20 HDG	750	150	2.74	1	
MDS45 180 20 HDG	800	150	2.85	1	
MDS45 190 20 HDG	900	150	3.07	1	
MDS45 100 20 HDG	1000	150	3.29	1	
MDS45 102 20 HDG	1200	150	3.73	1	

Vertical 45° Outside Bend of Cable Ladder (stable) Radius:300

45° Dikey Merdiven Dış Bükey Elemanı-(Sabit) Radyus:300 - Арка фиксированная кабельроста, внешняя 45° радиус:300

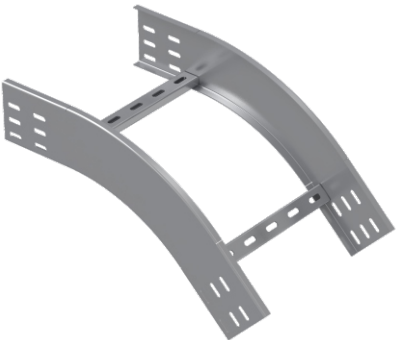

Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized



MDS45R2... H80		1.5mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
MDS45R2 810 15 HDG	100	300	1.39	1	
MDS45R2 815 15 HDG	150	300	2.08	1	
MDS45R2 820 15 HDG	200	300	2.17	1	
MDS45R2 825 15 HDG	250	300	2.26	1	
MDS45R2 830 15 HDG	300	300	2.36	1	
MDS45R2 840 15 HDG	400	300	2.54	1	
MDS45R2 845 15 HDG	450	300	2.63	1	
MDS45R2 850 15 HDG	500	300	2.72	1	
MDS45R2 860 15 HDG	600	300	2.91	1	
MDS45R2 870 15 HDG	700	300	3.09	1	
MDS45R2 875 15 HDG	750	300	3.18	1	
MDS45R2 880 15 HDG	800	300	3.27	1	
MDS45R2 890 15 HDG	900	300	3.46	1	
MDS45R2 800 15 HDG	1000	300	3.64	1	
MDS45R2 802 15 HDG	1200	300	4.01	1	

MDS45R2... H80		2.0mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
MDS45R2 810 20 HDG	100	300	2.65	1	
MDS45R2 815 20 HDG	150	300	2.77	1	
MDS45R2 820 20 HDG	200	300	2.89	1	
MDS45R2 825 20 HDG	250	300	3.02	1	
MDS45R2 830 20 HDG	300	300	3.14	1	
MDS45R2 840 20 HDG	400	300	3.38	1	
MDS45R2 845 20 HDG	450	300	3.51	1	
MDS45R2 850 20 HDG	500	300	3.63	1	
MDS45R2 860 20 HDG	600	300	3.87	1	
MDS45R2 870 20 HDG	700	300	4.12	1	
MDS45R2 875 20 HDG	750	300	4.24	1	
MDS45R2 880 20 HDG	800	300	4.36	1	
MDS45R2 890 20 HDG	900	300	4.61	1	
MDS45R2 800 20 HDG	1000	300	4.85	1	
MDS45R2 802 20 HDG	1200	300	5.34	1	

MDS45 H80 HDG

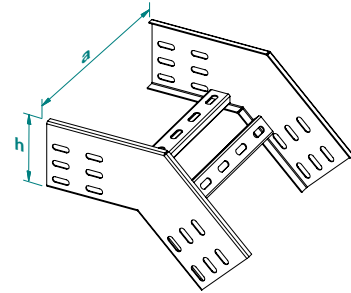

MDS45R2 H80 HDG

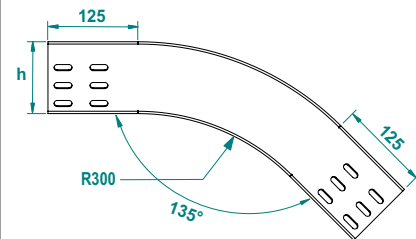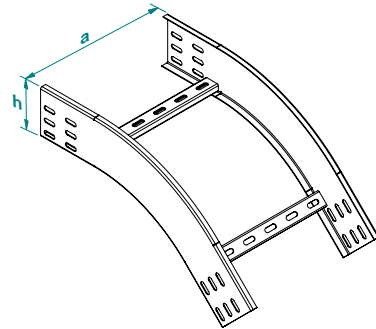

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method
to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0


Cable Ladder Systems of Side Height 80



MTK
MADE IN TURKEY

Vertical 45° Outside Bend of Cable Ladder (stable) Radius:450

45° Dikey Merdiven Dış Bükey Elemanı-(Sabit) -45° Dikey Merdiven Dış Bükey Elemanı-(Sabit) Radyus:450

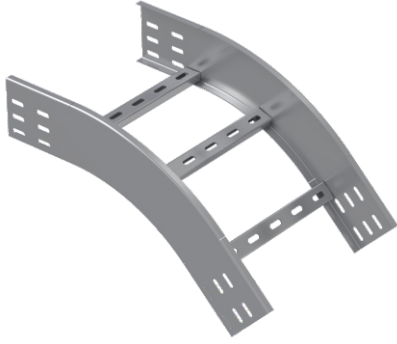

Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8


Hot-Dip Galvanized

MDS45R3... H80					1.5mm
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
MDS45R3 810 15 HDG	100	450	2.50	1	
MDS45R3 815 15 HDG	150	450	2.64	1	
MDS45R3 820 15 HDG	200	450	2.78	1	
MDS45R3 825 15 HDG	250	450	2.91	1	
MDS45R3 830 15 HDG	300	450	3.05	1	
MDS45R3 840 15 HDG	400	450	3.33	1	
MDS45R3 845 15 HDG	450	450	3.46	1	
MDS45R3 850 15 HDG	500	450	3.60	1	
MDS45R3 860 15 HDG	600	450	3.88	1	
MDS45R3 870 15 HDG	700	450	4.15	1	
MDS45R3 875 15 HDG	750	450	4.29	1	
MDS45R3 880 15 HDG	800	450	4.43	1	
MDS45R3 890 15 HDG	900	450	4.70	1	
MDS45R3 800 15 HDG	1000	450	4.98	1	
MDS45R3 802 15 HDG	1200	450	5.53	1	

MDS45R3... H80					2.0mm
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
MDS45R3 110 20 HDG	100	450	3.33	1	
MDS45R3 115 20 HDG	150	450	3.52	1	
MDS45R3 120 20 HDG	200	450	3.70	1	
MDS45R3 125 20 HDG	250	450	3.88	1	
MDS45R3 130 20 HDG	300	450	4.07	1	
MDS45R3 140 20 HDG	400	450	4.43	1	
MDS45R3 145 20 HDG	450	450	4.62	1	
MDS45R3 150 20 HDG	500	450	4.80	1	
MDS45R3 160 20 HDG	600	450	5.17	1	
MDS45R3 170 20 HDG	700	450	5.54	1	
MDS45R3 175 20 HDG	750	450	5.72	1	
MDS45R3 180 20 HDG	800	450	5.90	1	
MDS45R3 190 20 HDG	900	450	6.27	1	
MDS45R3 100 20 HDG	1000	450	6.64	1	
MDS45R3 102 20 HDG	1200	450	7.37	1	

Vertical 45° Outside Bend of Cable Ladder (stable) Radius:600

45° Dikey Merdiven Dış Bükey Elemanı-(Sabit) Radyus:600 - Арка фиксированная кабельроста, внешняя 45° радиус:600

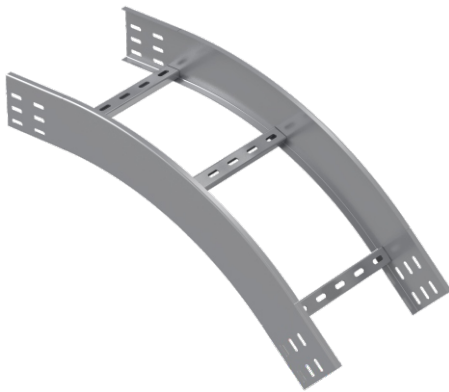

Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized



MDS45R4... H80					1.5mm
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
MDS45R4 110 15 HDG	100	600	3.10	1	
MDS45R4 115 15 HDG	150	600	3.24	1	
MDS45R4 120 15 HDG	200	600	3.38	1	
MDS45R4 125 15 HDG	250	600	3.51	1	
MDS45R4 130 15 HDG	300	600	3.65	1	
MDS45R4 140 15 HDG	400	600	3.93	1	
MDS45R4 145 15 HDG	450	600	4.06	1	
MDS45R4 150 15 HDG	500	600	4.20	1	
MDS45R4 160 15 HDG	600	600	4.48	1	
MDS45R4 170 15 HDG	700	600	4.75	1	
MDS45R4 175 15 HDG	750	600	4.89	1	
MDS45R4 180 15 HDG	800	600	5.03	1	
MDS45R4 190 15 HDG	900	600	5.30	1	
MDS45R4 100 15 HDG	1000	600	5.58	1	
MDS45R4 102 15 HDG	1200	600	6.13	1	

MDS45R4... H80					2.0mm
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
MDS45R4 110 20 HDG	100	600	3.10	1	
MDS45R4 115 20 HDG	150	600	4.32	1	
MDS45R4 120 20 HDG	200	600	4.50	1	
MDS45R4 125 20 HDG	250	600	4.68	1	
MDS45R4 130 20 HDG	300	600	4.87	1	
MDS45R4 140 20 HDG	400	600	5.23	1	
MDS45R4 145 20 HDG	450	600	5.42	1	
MDS45R4 150 20 HDG	500	600	5.60	1	
MDS45R4 160 20 HDG	600	600	5.97	1	
MDS45R4 170 20 HDG	700	600	6.34	1	
MDS45R4 175 20 HDG	750	600	6.52	1	
MDS45R4 180 20 HDG	800	600	6.70	1	
MDS45R4 190 20 HDG	900	600	7.07	1	
MDS45R4 100 20 HDG	1000	600	7.44	1	
MDS45R4 102 20 HDG	1200	600	8.17	1	

MDS45R3 H80 HDG

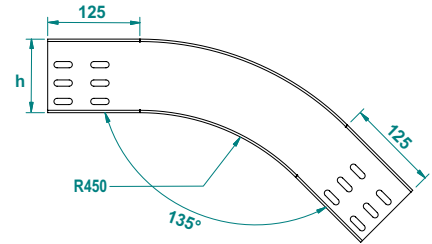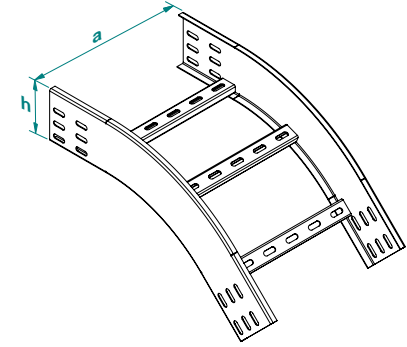

MDS45R4 H80 HDG

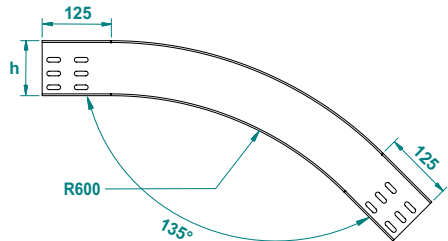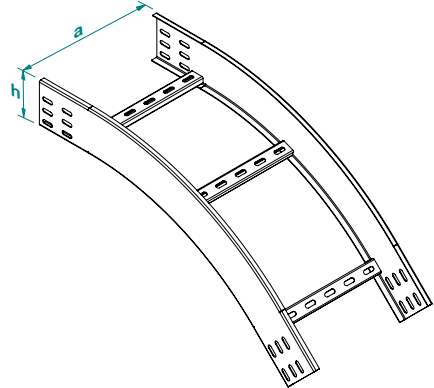

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method
to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0


Cable Ladder Systems of Side Height 80



MTK
MADE IN TURKEY

Vertical 30° Outside Bend of Cable Ladder (stable)

30° Dikey Merdiven Dış Bükey Elemanı-(Sabit) - Арка фиксированная кабельроста, внешняя 30°

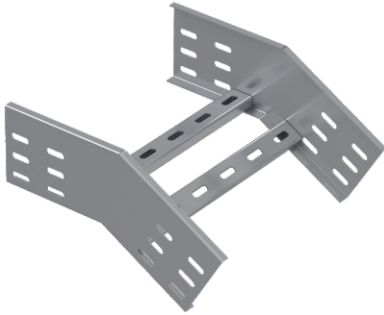

Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8


Hot-Dip Galvanized

MDS30... H80		1.5mm		
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs
MDS30 810 15 HDG	100	150	0.98	1
MDS30 815 15 HDG	150	150	1.06	1
MDS30 820 15 HDG	200	150	1.15	1
MDS30 825 15 HDG	250	150	1.23	1
MDS30 830 15 HDG	300	150	1.31	1
MDS30 840 15 HDG	400	150	1.48	1
MDS30 845 15 HDG	450	150	1.56	1
MDS30 850 15 HDG	500	150	1.64	1
MDS30 860 15 HDG	600	150	1.81	1
MDS30 870 15 HDG	700	150	1.97	1
MDS30 875 15 HDG	750	150	2.05	1
MDS30 880 15 HDG	800	150	2.14	1
MDS30 890 15 HDG	900	150	2.30	1
MDS30 800 15 HDG	1000	150	2.47	1
MDS30 802 15 HDG	1200	150	2.80	1

MDS30... H80		2.0mm		
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs
MDS30 810 20 HDG	100	150	1.31	1
MDS30 815 20 HDG	150	150	1.42	1
MDS30 820 20 HDG	200	150	1.53	1
MDS30 825 20 HDG	250	150	1.64	1
MDS30 830 20 HDG	300	150	1.75	1
MDS30 840 20 HDG	400	150	1.97	1
MDS30 845 20 HDG	450	150	2.08	1
MDS30 850 20 HDG	500	150	2.19	1
MDS30 860 20 HDG	600	150	2.41	1
MDS30 870 20 HDG	700	150	2.63	1
MDS30 875 20 HDG	750	150	2.74	1
MDS30 880 20 HDG	800	150	2.85	1
MDS30 890 20 HDG	900	150	3.07	1
MDS30 800 20 HDG	1000	150	3.29	1
MDS30 802 20 HDG	1200	150	3.73	1

Vertical 30° Outside Bend of Cable Ladder (stable) Radius:300

30° Dikey Merdiven Dış Bükey Elemanı-(Sabit) Radyus:300 - Арка фиксированная кабельроста, внешняя 30° радиус:300

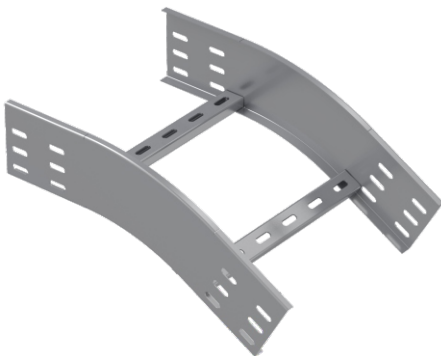

Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized



MDS30R2... H80		1.5mm		
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs
MDS30R2 810 15 HDG	100	300	1.24	1
MDS30R2 815 15 HDG	150	300	1.33	1
MDS30R2 820 15 HDG	200	300	1.42	1
MDS30R2 825 15 HDG	250	300	1.51	1
MDS30R2 830 15 HDG	300	300	1.61	1
MDS30R2 840 15 HDG	400	300	1.79	1
MDS30R2 845 15 HDG	450	300	1.88	1
MDS30R2 850 15 HDG	500	300	1.97	1
MDS30R2 860 15 HDG	600	300	2.16	1
MDS30R2 870 15 HDG	700	300	2.34	1
MDS30R2 875 15 HDG	750	300	2.43	1
MDS30R2 880 15 HDG	800	300	2.52	1
MDS30R2 890 15 HDG	900	300	2.71	1
MDS30R2 800 15 HDG	1000	300	2.89	1
MDS30R2 802 15 HDG	1200	300	3.26	1

MDS30R2... H80		2.0mm		
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs
MDS30R2 810 20 HDG	100	300	1.65	1
MDS30R2 815 20 HDG	150	300	1.77	1
MDS30R2 820 20 HDG	200	300	1.89	1
MDS30R2 825 20 HDG	250	300	2.02	1
MDS30R2 830 20 HDG	300	300	2.14	1
MDS30R2 840 20 HDG	400	300	2.38	1
MDS30R2 845 20 HDG	450	300	2.51	1
MDS30R2 850 20 HDG	500	300	2.63	1
MDS30R2 860 20 HDG	600	300	2.87	1
MDS30R2 870 20 HDG	700	300	3.12	1
MDS30R2 875 20 HDG	750	300	3.24	1
MDS30R2 880 20 HDG	800	300	3.36	1
MDS30R2 890 20 HDG	900	300	3.61	1
MDS30R2 800 20 HDG	1000	300	3.85	1
MDS30R2 802 20 HDG	1200	300	4.34	1

MDS30 H80 HDG

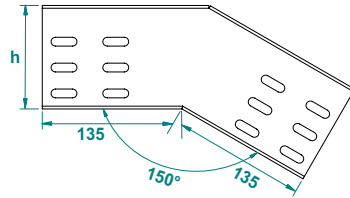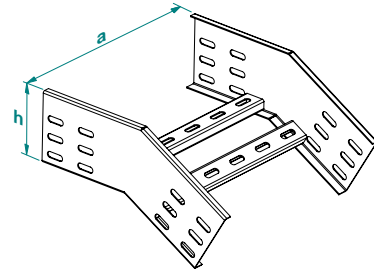

MDS30R2 H80 HDG

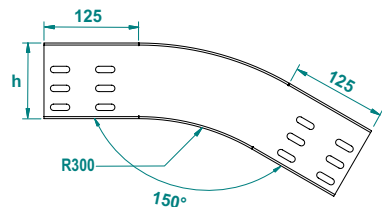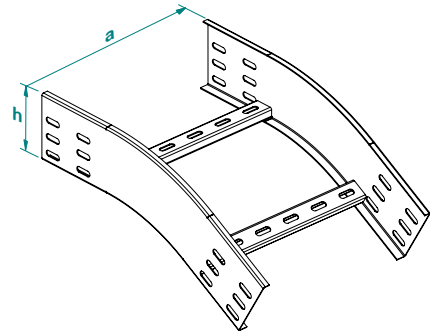

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method
to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: **1.5 2.0**


Cable Ladder Systems of Side Height 80



MTK
MADE IN TURKEY

Vertical 30° Outside Bend of Cable Ladder (stable) Radius:450

30° Dikey Merdiven Dış Bükey Elemanı-(Sabit) Radyus:450 - Арка фиксированная кабельроста, внешняя 30° радиус:450

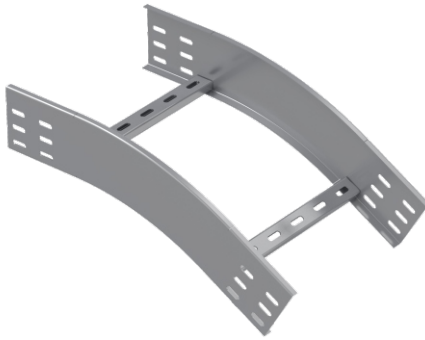

Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8


Hot-Dip Galvanized

MDS30R3... H80		1.5mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
MDS30R3 810 15 HDG	100	450	1.39	1	
MDS30R3 815 15 HDG	150	450	1.48	1	
MDS30R3 820 15 HDG	200	450	1.57	1	
MDS30R3 825 15 HDG	250	450	1.66	1	
MDS30R3 830 15 HDG	300	450	1.76	1	
MDS30R3 840 15 HDG	400	450	1.94	1	
MDS30R3 845 15 HDG	450	450	2.03	1	
MDS30R3 850 15 HDG	500	450	2.12	1	
MDS30R3 860 15 HDG	600	450	2.31	1	
MDS30R3 870 15 HDG	700	450	2.49	1	
MDS30R3 875 15 HDG	750	450	2.58	1	
MDS30R3 880 15 HDG	800	450	2.67	1	
MDS30R3 890 15 HDG	900	450	2.86	1	
MDS30R3 800 15 HDG	1000	450	3.04	1	
MDS30R3 802 15 HDG	1200	450	3.41	1	

MDS30R3... H80		2.0mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
MDS30R3 810 20 HDG	100	450	1.85	1	
MDS30R3 815 20 HDG	150	450	1.97	1	
MDS30R3 820 20 HDG	200	450	2.09	1	
MDS30R3 825 20 HDG	250	450	2.22	1	
MDS30R3 830 20 HDG	300	450	2.34	1	
MDS30R3 840 20 HDG	400	450	2.58	1	
MDS30R3 845 20 HDG	450	450	2.71	1	
MDS30R3 850 20 HDG	500	450	2.83	1	
MDS30R3 860 20 HDG	600	450	3.07	1	
MDS30R3 870 20 HDG	700	450	3.32	1	
MDS30R3 875 20 HDG	750	450	3.44	1	
MDS30R3 880 20 HDG	800	450	3.56	1	
MDS30R3 890 20 HDG	900	450	3.81	1	
MDS30R3 800 20 HDG	1000	450	4.05	1	
MDS30R3 802 20 HDG	1200	450	4.54	1	

Vertical 30° Outside Bend of Cable Ladder (stable) Radius:600

30° Dikey Merdiven Dış Bükey Elemanı-(Sabit) Radyus:600 - Арка фиксированная кабельроста, внешняя 30° радиус:600

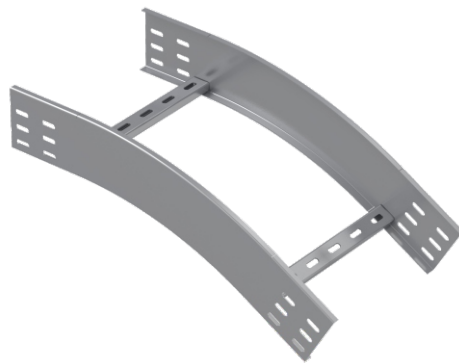

Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized



MDS30R4... H80		1.5mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
MDS30R4 810 15 HDG	100	600	1.84	1	
MDS30R4 815 15 HDG	150	600	1.98	1	
MDS30R4 820 15 HDG	200	600	2.12	1	
MDS30R4 825 15 HDG	250	600	2.25	1	
MDS30R4 830 15 HDG	300	600	2.39	1	
MDS30R4 840 15 HDG	400	600	2.67	1	
MDS30R4 845 15 HDG	450	600	2.80	1	
MDS30R4 850 15 HDG	500	600	2.94	1	
MDS30R4 860 15 HDG	600	600	3.22	1	
MDS30R4 870 15 HDG	700	600	3.49	1	
MDS30R4 875 15 HDG	750	600	3.63	1	
MDS30R4 880 15 HDG	800	600	3.77	1	
MDS30R4 890 15 HDG	900	600	4.04	1	
MDS30R4 800 15 HDG	1000	600	4.32	1	
MDS30R4 802 15 HDG	1200	600	4.87	1	

MDS30R4... H80		2.0mm			
CODE	Width a=b mm	Radius R mm	kg 1pc	pcs	
MDS30R4 810 20 HDG	100	600	2.45	1	
MDS30R4 815 20 HDG	150	600	2.64	1	
MDS30R4 820 20 HDG	200	600	2.82	1	
MDS30R4 825 20 HDG	250	600	3.00	1	
MDS30R4 830 20 HDG	300	600	3.19	1	
MDS30R4 840 20 HDG	400	600	3.55	1	
MDS30R4 845 20 HDG	450	600	3.74	1	
MDS30R4 850 20 HDG	500	600	3.92	1	
MDS30R4 860 20 HDG	600	600	4.29	1	
MDS30R4 870 20 HDG	700	600	4.66	1	
MDS30R4 875 20 HDG	750	600	4.84	1	
MDS30R4 880 20 HDG	800	600	5.02	1	
MDS30R4 890 20 HDG	900	600	5.39	1	
MDS30R4 800 20 HDG	1000	600	5.76	1	
MDS30R4 802 20 HDG	1200	600	6.49	1	

MDS30R3 H80 HDG

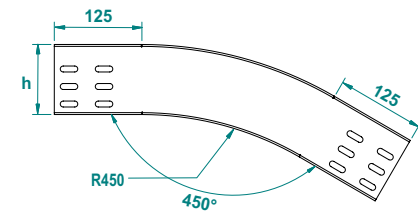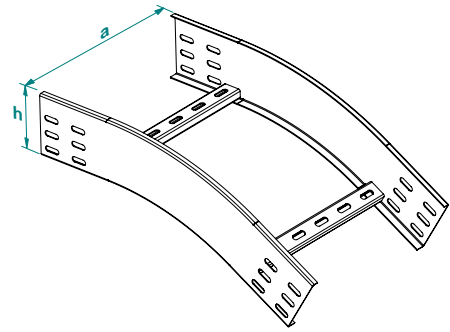

MDS30R4 H80 HDG

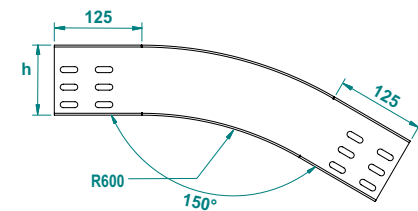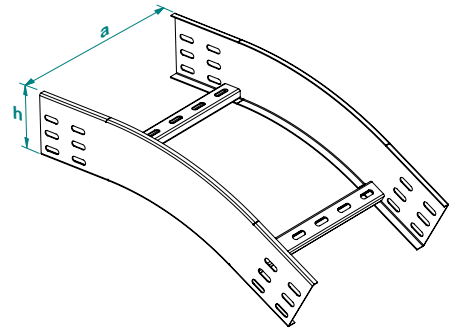

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method
to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0


Cable Ladder Systems of Side Height 80



MTK
MADE IN TURKEY

Modular Inside - Outside Cable Ladder Bend

Modular Merdiven iniş - çıkış dönüştürücü - Шарнирная дуга кабельроста

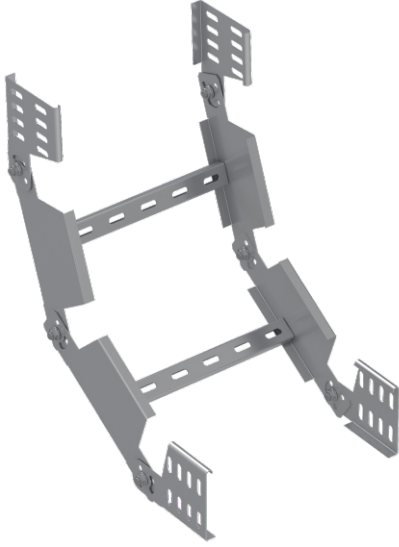

Hot-Dip Galvanized


MMD = 2 pc of MMB + 2 set of BDD
MMD = 2 ADET MMB + 2 Takım BDD'den oluşmaktadır.

MMD... H80		1.5mm	
CODE	Width a=b mm	Radius R mm	kg 1pc
MMD 810 15 HDG	100	300	2.50
MMD 815 15 HDG	150	300	2.58
MMD 820 15 HDG	200	300	2.67
MMD 825 15 HDG	250	300	2.75
MMD 830 15 HDG	300	300	2.83
MMD 840 15 HDG	400	300	3.00
MMD 845 15 HDG	450	300	3.08
MMD 850 15 HDG	500	300	3.16
MMD 860 15 HDG	600	300	3.33
MMD 870 15 HDG	700	300	3.49
MMD 875 15 HDG	750	300	3.57
MMD 880 15 HDG	800	300	3.66
MMD 890 15 HDG	900	300	3.82
MMD 890 15 HDG	1000	300	3.98
MMD 802 15 HDG	1200	300	4.31

MMD... H80		2.0mm	
CODE	Width a=b mm	Radius R mm	kg 1pc
MMD 810 20 HDG	100	300	3.33
MMD 815 20 HDG	150	300	3.44
MMD 820 20 HDG	200	300	3.55
MMD 825 20 HDG	250	300	3.66
MMD 830 20 HDG	300	300	3.77
MMD 840 20 HDG	400	300	3.99
MMD 845 20 HDG	450	300	4.10
MMD 850 20 HDG	500	300	4.21
MMD 860 20 HDG	600	300	4.43
MMD 870 20 HDG	700	300	4.65
MMD 875 20 HDG	750	300	4.76
MMD 880 20 HDG	800	300	4.87
MMD 890 20 HDG	900	300	5.09
MMD 890 20 HDG	1000	300	5.31
MMD 802 20 HDG	1200	300	5.75

Modular Adjustable Cable Ladder Riser

Modular Merdiven iniş - çıkış elemanı - Шарнирный элемент дуги кабельроста

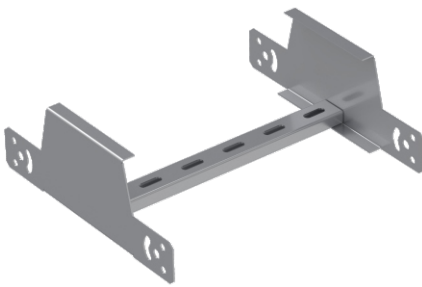


Hot-Dip Galvanized

Important!
To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8


MMB... H80		1.5mm	
CODE	Width a=b mm	kg 1pc	pcs
MMB 810 15 HDG	100	0.90	1
MMB 815 15 HDG	150	0.94	1
MMB 820 15 HDG	200	0.98	1
MMB 825 15 HDG	250	1.02	1
MMB 830 15 HDG	300	1.06	1
MMB 840 15 HDG	400	1.15	1
MMB 845 15 HDG	450	1.19	1
MMB 850 15 HDG	500	1.23	1
MMB 860 15 HDG	600	1.31	1
MMB 870 15 HDG	700	1.39	1
MMB 875 15 HDG	750	1.44	1
MMB 880 15 HDG	800	1.48	1
MMB 890 15 HDG	900	1.56	1
MMB 890 15 HDG	1000	1.64	1
MMB 802 15 HDG	1200	1.81	1

MMB... H80		2.0mm	
CODE	Width a=b mm	kg 1pc	pcs
MMB 810 20 HDG	100	1.20	1
MMB 815 20 HDG	150	1.25	1
MMB 820 20 HDG	200	1.31	1
MMB 825 20 HDG	250	1.36	1
MMB 830 20 HDG	300	1.42	1
MMB 840 20 HDG	400	1.53	1
MMB 845 20 HDG	450	1.58	1
MMB 850 20 HDG	500	1.64	1
MMB 860 20 HDG	600	1.75	1
MMB 870 20 HDG	700	1.86	1
MMB 875 20 HDG	750	1.91	1
MMB 880 20 HDG	800	1.97	1
MMB 890 20 HDG	900	2.08	1
MMB 890 20 HDG	1000	2.19	1
MMB 802 20 HDG	1200	2.41	1

MMD H80 HDG

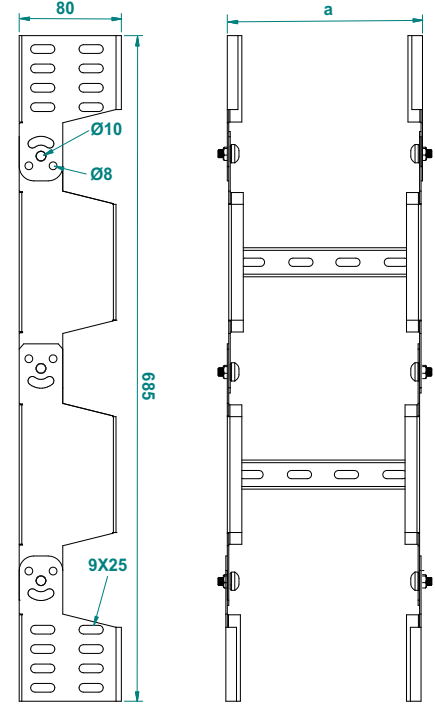

MMB H80 HDG

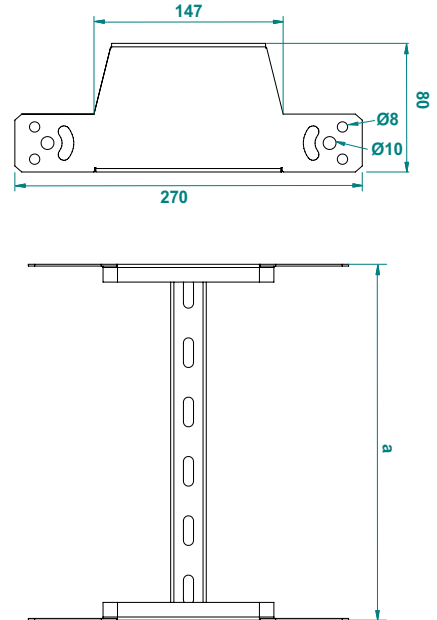

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method
to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0


Cable Ladder Systems of Side Height 80



MTK
MADE IN TURKEY

Vertical Tee Bend of Cable Ladder, Lengthwise

Dikey "T" Merdiven Dönüş Elemanı - T-отвод кабельлоста вертикальный, развернутый

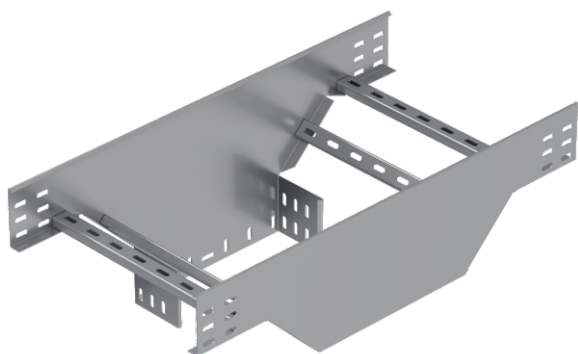

Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8


Hot-Dip Galvanized

MDT... H80		1.5mm	
CODE	Width a=b mm	kg 1pc	pcs
MDT 810 15 HDG	100	3.61	1
MDT 815 15 HDG	150	4.06	1
MDT 820 15 HDG	200	4.51	1
MDT 825 15 HDG	250	4.96	1
MDT 830 15 HDG	300	5.40	1
MDT 840 15 HDG	400	6.30	1
MDT 845 15 HDG	450	6.75	1
MDT 850 15 HDG	500	7.19	1
MDT 860 15 HDG	600	8.09	1
MDT 870 15 HDG	700	8.98	1
MDT 875 15 HDG	750	9.43	1
MDT 880 15 HDG	800	9.88	1
MDT 890 15 HDG	900	10.77	1
MDT 800 15 HDG	1000	11.67	1
MDT 802 15 HDG	1200	13.46	1

MDT... H80		2.0mm	
CODE	Width a=b mm	kg 1pc	pcs
MDT 810 20 HDG	100	4.82	1
MDT 815 20 HDG	150	5.41	1
MDT 820 20 HDG	200	6.01	1
MDT 825 20 HDG	250	6.61	1
MDT 830 20 HDG	300	7.20	1
MDT 840 20 HDG	400	8.40	1
MDT 845 20 HDG	450	8.99	1
MDT 850 20 HDG	500	9.59	1
MDT 860 20 HDG	600	10.78	1
MDT 870 20 HDG	700	11.97	1
MDT 875 20 HDG	750	12.57	1
MDT 880 20 HDG	800	13.17	1
MDT 890 20 HDG	900	14.36	1
MDT 800 20 HDG	1000	15.55	1
MDT 802 20 HDG	1200	17.94	1

Vertical Tee Bend of Cable Ladder from the Middle

Dikey Ortadan "T" Merdiven Dönüş Elemanı - T-отвод кабельлоста вертикальный, прямой

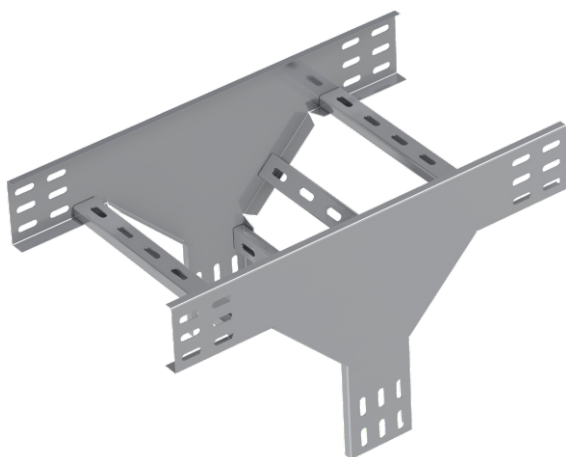

Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized



MMT... H80		1.5mm	
CODE	Width a=b mm	kg 1pc	pcs
MMT 810 15 HDG	100	3.23	1
MMT 815 15 HDG	150	3.43	1
MMT 820 15 HDG	200	3.64	1
MMT 825 15 HDG	250	3.84	1
MMT 830 15 HDG	300	4.05	1
MMT 840 15 HDG	400	4.46	1
MMT 845 15 HDG	450	4.67	1
MMT 850 15 HDG	500	4.88	1
MMT 860 15 HDG	600	5.29	1
MMT 870 15 HDG	700	5.70	1
MMT 875 15 HDG	750	5.91	1
MMT 880 15 HDG	800	6.11	1
MMT 890 15 HDG	900	6.52	1
MMT 800 15 HDG	1000	6.94	1
MMT 802 15 HDG	1200	7.76	1

MMT... H80		2.0mm	
CODE	Width a=b mm	kg 1pc	pcs
MMT 810 20 HDG	100	4.30	1
MMT 815 20 HDG	150	4.58	1
MMT 820 20 HDG	200	4.85	1
MMT 825 20 HDG	250	5.12	1
MMT 830 20 HDG	300	5.40	1
MMT 840 20 HDG	400	5.95	1
MMT 845 20 HDG	450	6.22	1
MMT 850 20 HDG	500	6.50	1
MMT 860 20 HDG	600	7.05	1
MMT 870 20 HDG	700	7.60	1
MMT 875 20 HDG	750	7.87	1
MMT 880 20 HDG	800	8.15	1
MMT 890 20 HDG	900	8.70	1
MMT 800 20 HDG	1000	9.25	1
MMT 802 20 HDG	1200	10.35	1

MDT H80 HDG

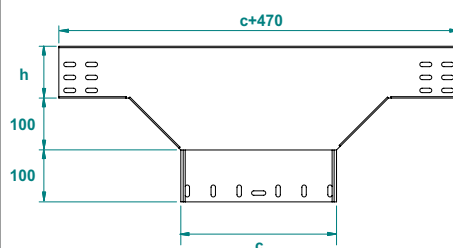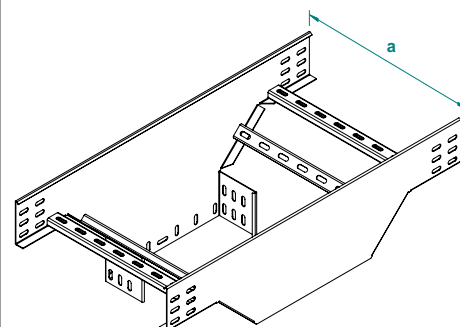

MMT H80 HDG

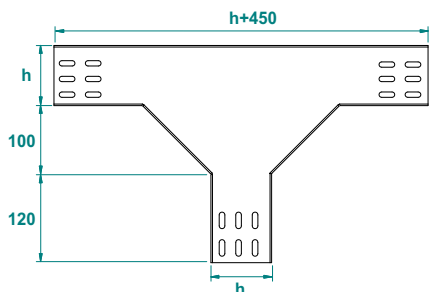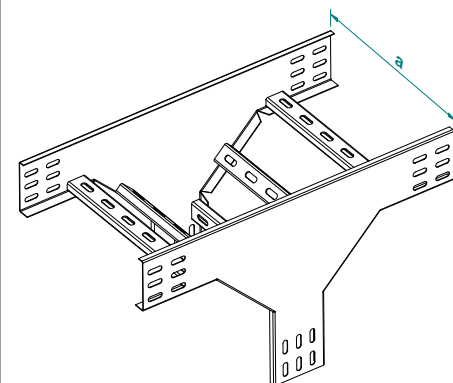

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method

to TS-EN 10346:2011 (PG)

SS- stainless steel AISI 304L and AISI 316L (SS)

EP- powder coating in a full range of colours (RAL)


Thickn. (ga) [mm]: 1.5 2.0

Cable Ladder Systems of Side Height 80



Vertical Tee Bend of Cable Ladder from the Middle Radius:300

Dikey Ortadan "T" Merdiven Dönüş Elemanı Radyus:300 - T-отвод кабельроста вертикальный, прямой радиус:300

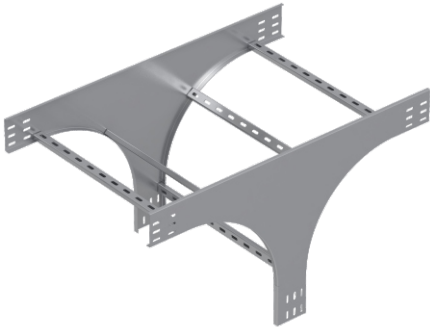

Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8


Hot-Dip Galvanized

MMTR2... H80		1.5mm	
CODE	Width a=b mm	Radius R mm	kg 1pc
MMTR2 810 15 HDG	100	300	6.85
MMTR2 815 15 HDG	150	300	7.08
MMTR2 820 15 HDG	200	300	7.31
MMTR2 825 15 HDG	250	300	7.54
MMTR2 830 15 HDG	300	300	7.77
MMTR2 840 15 HDG	400	300	8.23
MMTR2 845 15 HDG	450	300	8.46
MMTR2 850 15 HDG	500	300	8.69
MMTR2 860 15 HDG	600	300	9.15
MMTR2 870 15 HDG	700	300	9.61
MMTR2 875 15 HDG	750	300	9.84
MMTR2 880 15 HDG	800	300	10.07
MMTR2 890 15 HDG	900	300	10.57
MMTR2 800 15 HDG	1000	300	10.98
MMTR2 802 15 HDG	1200	300	11.90

MMTR2... H80		2.0mm	
CODE	Width a=b mm	Radius R mm	kg 1pc
MMTR2 810 20 HDG	100	300	9.13
MMTR2 815 20 HDG	150	300	9.44
MMTR2 820 20 HDG	200	300	9.75
MMTR2 825 20 HDG	250	300	10.05
MMTR2 830 20 HDG	300	300	10.36
MMTR2 840 20 HDG	400	300	10.97
MMTR2 845 20 HDG	450	300	11.28
MMTR2 850 20 HDG	500	300	11.58
MMTR2 860 20 HDG	600	300	12.19
MMTR2 870 20 HDG	700	300	12.81
MMTR2 875 20 HDG	750	300	13.11
MMTR2 880 20 HDG	800	300	13.42
MMTR2 890 20 HDG	900	300	14.03
MMTR2 800 20 HDG	1000	300	14.64
MMTR2 802 20 HDG	1200	300	15.87

Vertical Tee Bend of Cable Ladder from the Middle Radius:600

Dikey Ortadan "T" Merdiven Dönüş Elemanı Radyus:600 - T-отвод кабельроста вертикальный, прямой радиус:600

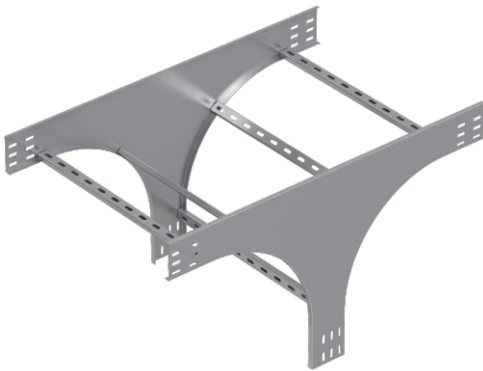

Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized



MMTR4... H80		1.5mm	
CODE	Width a=b mm	Radius R mm	kg 1pc
MMTR4 810 15 HDG	100	600	12.02
MMTR4 815 15 HDG	150	600	12.44
MMTR4 820 15 HDG	200	600	12.85
MMTR4 825 15 HDG	250	600	13.26
MMTR4 830 15 HDG	300	600	13.68
MMTR4 840 15 HDG	400	600	14.50
MMTR4 845 15 HDG	450	600	14.92
MMTR4 850 15 HDG	500	600	15.33
MMTR4 860 15 HDG	600	600	16.16
MMTR4 870 15 HDG	700	600	16.98
MMTR4 875 15 HDG	750	600	17.40
MMTR4 880 15 HDG	800	600	17.81
MMTR4 890 15 HDG	900	600	18.64
MMTR4 800 15 HDG	1000	600	19.46
MMTR4 802 15 HDG	1200	600	21.12

MMTR4... H80		2.0mm	
CODE	Width a=b mm	Radius R mm	kg 1pc
MMTR4 810 20 HDG	100	600	16.03
MMTR4 815 20 HDG	150	600	16.58
MMTR4 820 20 HDG	200	600	17.13
MMTR4 825 20 HDG	250	600	17.68
MMTR4 830 20 HDG	300	600	18.23
MMTR4 840 20 HDG	400	600	19.33
MMTR4 845 20 HDG	450	600	19.89
MMTR4 850 20 HDG	500	600	20.44
MMTR4 860 20 HDG	600	600	21.54
MMTR4 870 20 HDG	700	600	22.64
MMTR4 875 20 HDG	750	600	23.19
MMTR4 880 20 HDG	800	600	23.74
MMTR4 890 20 HDG	900	600	24.85
MMTR4 800 20 HDG	1000	600	25.95
MMTR4 802 20 HDG	1200	600	28.15

MMTR2 H80 HDG

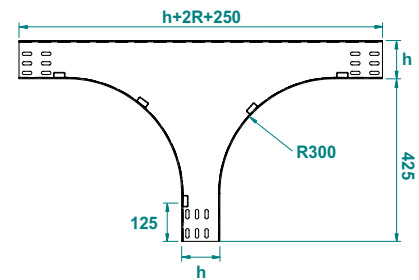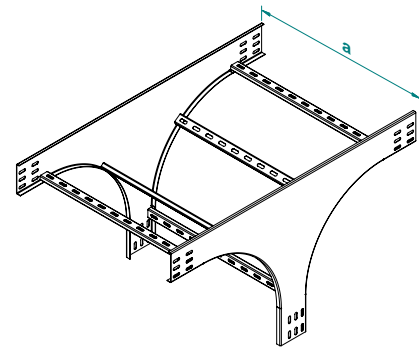

MMTR4 H80 HDG

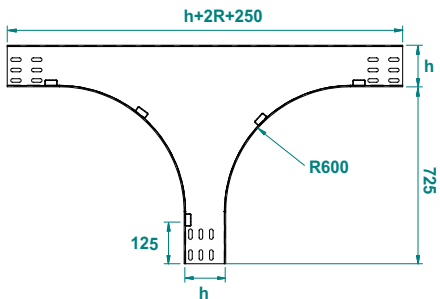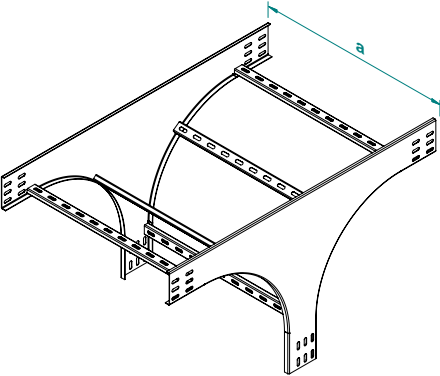

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method
to TS-EN 10346:2011 (PG)
SS- stainless steel AISI 304L and AISI 316L (SS)
EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0



Cable Ladder Systems of Side Height 80



MTK
MADE IN TURKEY

Middle Reducer Connection (set)

Parçalı Redüksiyon (Orta) - Редукционные планки, симметричные

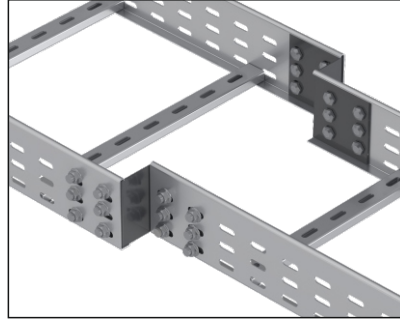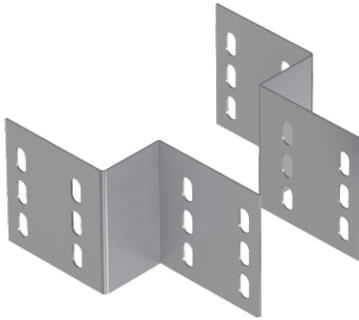

Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8


Hot-Dip Galvanized

RO... H80		1.5mm	
CODE	Reduction a mm	kg 1 set	pcs
RO 805 15 HDG	50	0.33	1
RO 810 15 HDG	100	0.38	1
RO 815 15 HDG	150	0.43	1
RO 820 15 HDG	200	0.48	1
RO 825 15 HDG	250	0.52	1
RO 830 15 HDG	300	0.57	1
RO 835 15 HDG	350	0.62	1
RO 840 15 HDG	400	0.66	1
RO 845 15 HDG	450	0.71	1
RO 850 15 HDG	500	0.76	1
RO 855 15 HDG	550	0.81	1
RO 860 15 HDG	600	0.85	1
RO 865 15 HDG	650	0.90	1
RO 870 15 HDG	700	0.95	1
RO 875 15 HDG	750	0.99	1
RO 880 15 HDG	800	1.04	1
RO 890 15 HDG	900	1.14	1

RO... H80		2.0mm	
CODE	Reduction a mm	kg 1 set	pcs
RO 805 20 HDG	50	0.44	1
RO 810 20 HDG	100	0.51	1
RO 815 20 HDG	150	0.57	1
RO 820 20 HDG	200	0.63	1
RO 825 20 HDG	250	0.70	1
RO 830 20 HDG	300	0.76	1
RO 835 20 HDG	350	0.82	1
RO 840 20 HDG	400	0.88	1
RO 845 20 HDG	450	0.95	1
RO 850 20 HDG	500	1.01	1
RO 855 20 HDG	550	1.07	1
RO 860 20 HDG	600	1.14	1
RO 865 20 HDG	650	1.20	1
RO 870 20 HDG	700	1.26	1
RO 875 20 HDG	750	1.32	1
RO 880 20 HDG	800	1.39	1
RO 890 20 HDG	900	1.51	1

Stop End (Blind End)

Sonlandırma - Зарпнушка



Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized



SON... H80		1.5mm	
CODE	Width a=b mm	kg 1pc	pcs
SON 810 15 HDG	100	0.21	1
SON 815 15 HDG	150	0.26	1
SON 820 15 HDG	200	0.31	1
SON 825 15 HDG	250	0.35	1
SON 830 15 HDG	300	0.40	1
SON 840 15 HDG	400	0.49	1
SON 845 15 HDG	450	0.54	1
SON 850 15 HDG	500	0.59	1
SON 860 15 HDG	600	0.68	1
SON 870 15 HDG	700	0.78	1
SON 875 15 HDG	750	0.82	1
SON 880 15 HDG	800	0.87	1
SON 890 15 HDG	900	0.97	1
SON 800 15 HDG	1000	1.06	1
SON 802 15 HDG	1200	1.25	1

SON... H80		2.0mm	
CODE	Width a=b mm	kg 1pc	pcs
SON 810 20 HDG	100	0.28	1
SON 815 20 HDG	150	0.34	1
SON 820 20 HDG	200	0.41	1
SON 825 20 HDG	250	0.47	1
SON 830 20 HDG	300	0.53	1
SON 840 20 HDG	400	0.66	1
SON 845 20 HDG	450	0.72	1
SON 850 20 HDG	500	0.78	1
SON 860 20 HDG	600	0.91	1
SON 870 20 HDG	700	1.03	1
SON 875 20 HDG	750	1.10	1
SON 880 20 HDG	800	1.16	1
SON 890 20 HDG	900	1.29	1
SON 800 20 HDG	1000	1.41	1
SON 802 20 HDG	1200	1.66	1

RO H80 HDG

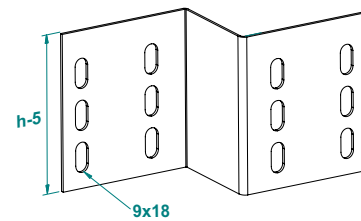

SON H80 HDG

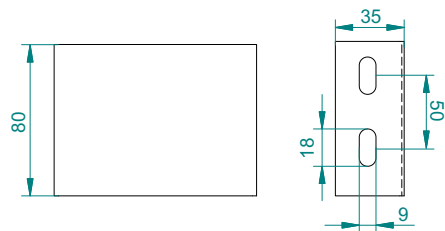

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method

to TS-EN 10346:2011 (PG)

SS- stainless steel AISI 304L and AISI 316L (SS)

EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0



Cable Ladder Systems of Side Height 80



MTK
MADE IN TURKEY

Left Reducer Connection (set)

Parçalı Redüksiyon (Sol) - Редукционные планки, левосторонние

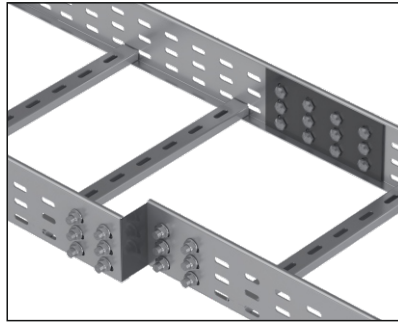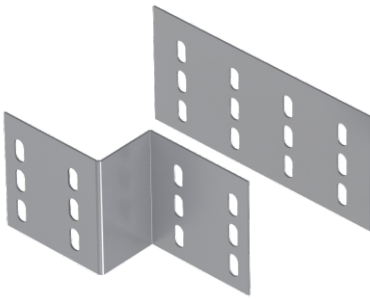

Important!

To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8



Hot-Dip Galvanized

RL... H80		1.5mm	
CODE	Reduction a mm	kg 1 set	pcs
RL 805 15 HDG	50	0.33	1
RL 810 15 HDG	100	0.38	1
RL 815 15 HDG	150	0.43	1
RL 820 15 HDG	200	0.48	1
RL 825 15 HDG	250	0.52	1
RL 830 15 HDG	300	0.57	1
RL 835 15 HDG	350	0.62	1
RL 840 15 HDG	400	0.66	1
RL 845 15 HDG	450	0.71	1
RL 850 15 HDG	500	0.76	1
RL 855 15 HDG	550	0.81	1
RL 860 15 HDG	600	0.85	1
RL 865 15 HDG	650	0.90	1
RL 870 15 HDG	700	0.95	1
RL 875 15 HDG	750	0.99	1
RL 880 15 HDG	800	1.04	1
RL 890 15 HDG	900	1.14	1

RL... H80		2.0mm	
CODE	Reduction a mm	kg 1 set	pcs
RL 805 20 HDG	50	0.44	1
RL 810 20 HDG	100	0.51	1
RL 815 20 HDG	150	0.57	1
RL 820 20 HDG	200	0.63	1
RL 825 20 HDG	250	0.70	1
RL 830 20 HDG	300	0.76	1
RL 835 20 HDG	350	0.82	1
RL 840 20 HDG	400	0.88	1
RL 845 20 HDG	450	0.95	1
RL 850 20 HDG	500	1.01	1
RL 855 20 HDG	550	1.07	1
RL 860 20 HDG	600	1.14	1
RL 865 20 HDG	650	1.20	1
RL 870 20 HDG	700	1.26	1
RL 875 20 HDG	750	1.32	1
RL 880 20 HDG	800	1.39	1
RL 890 20 HDG	900	1.51	1

Right Reducer Connection (set)

Parçalı Redüksiyon (Sağ) - Редукционные планки, правосторонние

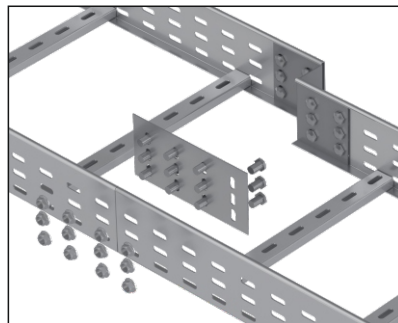

Important!



To install cable ladder bends use couplers KBE and screw sets CFS M6 or CFS M8

Hot-Dip Galvanized


RG... H80		1.5mm	
CODE	Reduction a mm	kg 1 set	pcs
RG 805 15 HDG	50	0.33	1
RG 810 15 HDG	100	0.38	1
RG 815 15 HDG	150	0.43	1
RG 820 15 HDG	200	0.48	1
RG 825 15 HDG	250	0.52	1
RG 830 15 HDG	300	0.57	1
RG 835 15 HDG	350	0.62	1
RG 840 15 HDG	400	0.66	1
RG 845 15 HDG	450	0.71	1
RG 850 15 HDG	500	0.76	1
RG 855 15 HDG	550	0.81	1
RG 860 15 HDG	600	0.85	1
RG 865 15 HDG	650	0.90	1
RG 870 15 HDG	700	0.95	1
RG 875 15 HDG	750	0.99	1
RG 880 15 HDG	800	1.04	1
RG 890 15 HDG	900	1.14	1

RG... H80		2.0mm	
CODE	Reduction a mm	kg 1 set	pcs
RG 805 20 HDG	50	0.44	1
RG 810 20 HDG	100	0.51	1
RG 815 20 HDG	150	0.57	1
RG 820 20 HDG	200	0.63	1
RG 825 20 HDG	250	0.70	1
RG 830 20 HDG	300	0.76	1
RG 835 20 HDG	350	0.82	1
RG 840 20 HDG	400	0.88	1
RG 845 20 HDG	450	0.95	1
RG 850 20 HDG	500	1.01	1
RG 855 20 HDG	550	1.07	1
RG 860 20 HDG	600	1.14	1
RG 865 20 HDG	650	1.20	1
RG 870 20 HDG	700	1.26	1
RG 875 20 HDG	750	1.32	1
RG 880 20 HDG	800	1.39	1
RG 890 20 HDG	900	1.51	1

RL H80 HDG

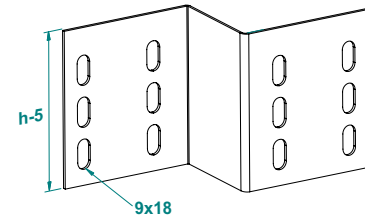

RG H80 HDG

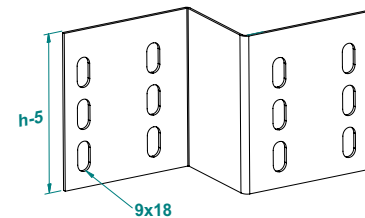

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method

to TS-EN 10346:2011 (PG)


SS- stainless steel AISI 304L and AISI 316L (SS)

EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0

Adjustable Vertical Connector

Dikey Seviye Degistirme Eki - Шарнирный соединитель

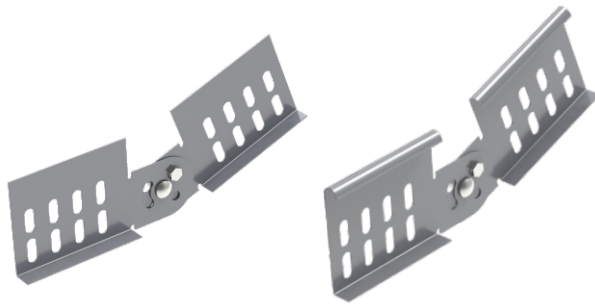

BDD 280

BDD 380

Hot-Dip Galvanized


BDD 2 ... H80		1.5mm		
CODE	Length L mm	kg ad/pc	kg ad/pc	pcs
BDD 280 15 HDG	250	0.36		50
		2.0mm		
BDD 280 20 HDG	250	0.48		50
		2.5mm		
BDD 280 25 HDG	250	0.60		50

Important!
To install cable tray - bend use Screw Sets
CFS M6 or CFS M8

BDD 3 ... H80		1.5mm		
CODE	Length L mm	kg ad/pc	kg ad/pc	pcs
BDD 380 15 HDG	250	0.40		50
		2.0mm		
BDD 380 20 HDG	250	0.53		50
		2.5mm		
BDD 380 25 HDG	250	0.66		50

Adjustable Horizontal Connector - Long Type

Yatay seviye degistirme eki - Uzun - Угловой соединитель - длинный

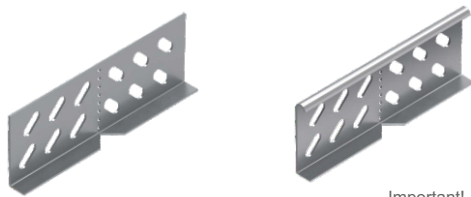

Pre - Galvanized

BYD 2 ... H80		1.5mm		
CODE	Length L mm	kg 1m	kg 1m	pcs
BYD 280 15 HDG	175	0.20		1
		2.0mm		
BYD 280 20 HDG	175	0.27		1
		2.5mm		
BYD 280 25 HDG	175	0.33		50

Important!
To install cable tray - bend use Screw Sets
CFS M6 or CFS M8

BYD 3 ... H80		1.5mm		
CODE	Length L mm	kg 1m	kg 1m	pcs
BYD 380 15 HDG	175	0.22		1
		2.0mm		
BYD 380 20 HDG	175	0.29		1
		2.5mm		
BYD 380 25 HDG	175	0.37		50

Seperator

Seperator - Перегородка



SEP 1

SEP 2

Pre - Galvanized


SEP 1... H80		1.0mm		
CODE	Height H mm	Length L mm	kg 1m	kg 1m
SEP 180 HDG	75	3000	0.67	1
			1.5mm	
SEP 180 15 HDG	75	3000	1.01	1
			2.0mm	
SEP 180 20 HDG	75	3000	1.34	1

Important!
To install cable tray - bend use Screw Sets
CFS M6 or CFS M8


SEP 2... H80		1.0mm		
CODE	Height H mm	Length L mm	kg 1m	kg 1m
SEP 280 10 HDG	75	3000	0.75	1
			1.5mm	
SEP 280 15 HDG	75	3000	1.12	1
			2.0mm	
SEP 280 20 HDG	75	3000	1.50	1



BDD 280




BDD 380

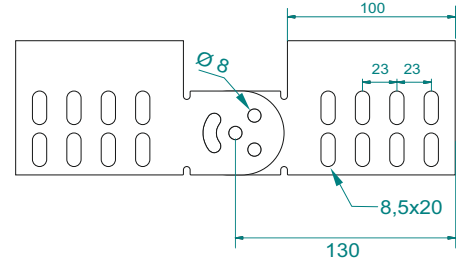

BYD 280







BYD 380

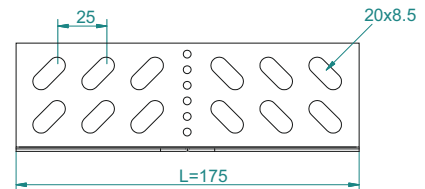

SEP 1 HDG

SEP 2 HDG

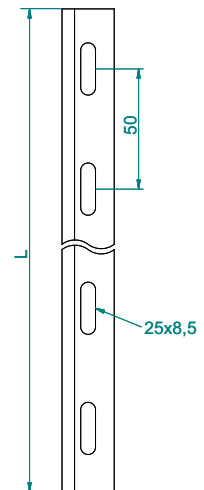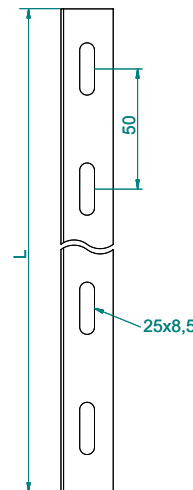

APPLICATIONS

Cable routing

MATERIAL

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

Steel, strip-galv. acc. to the Sendzimir method

to TS-EN 10346:2011 (PG)

SS- stainless steel AISI 304L and AISI 316L (SS)

EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: 1.5 2.0